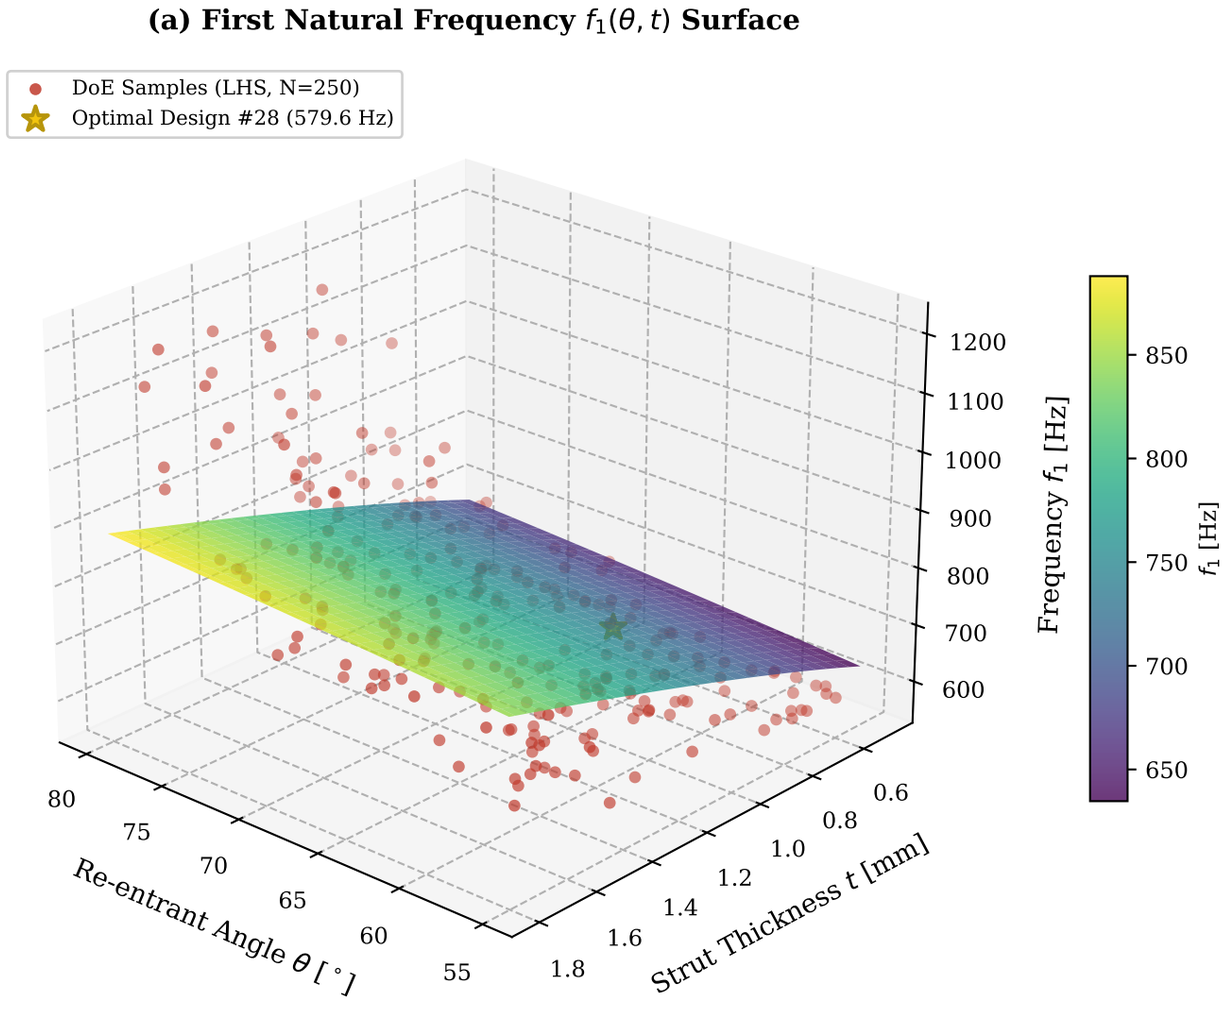
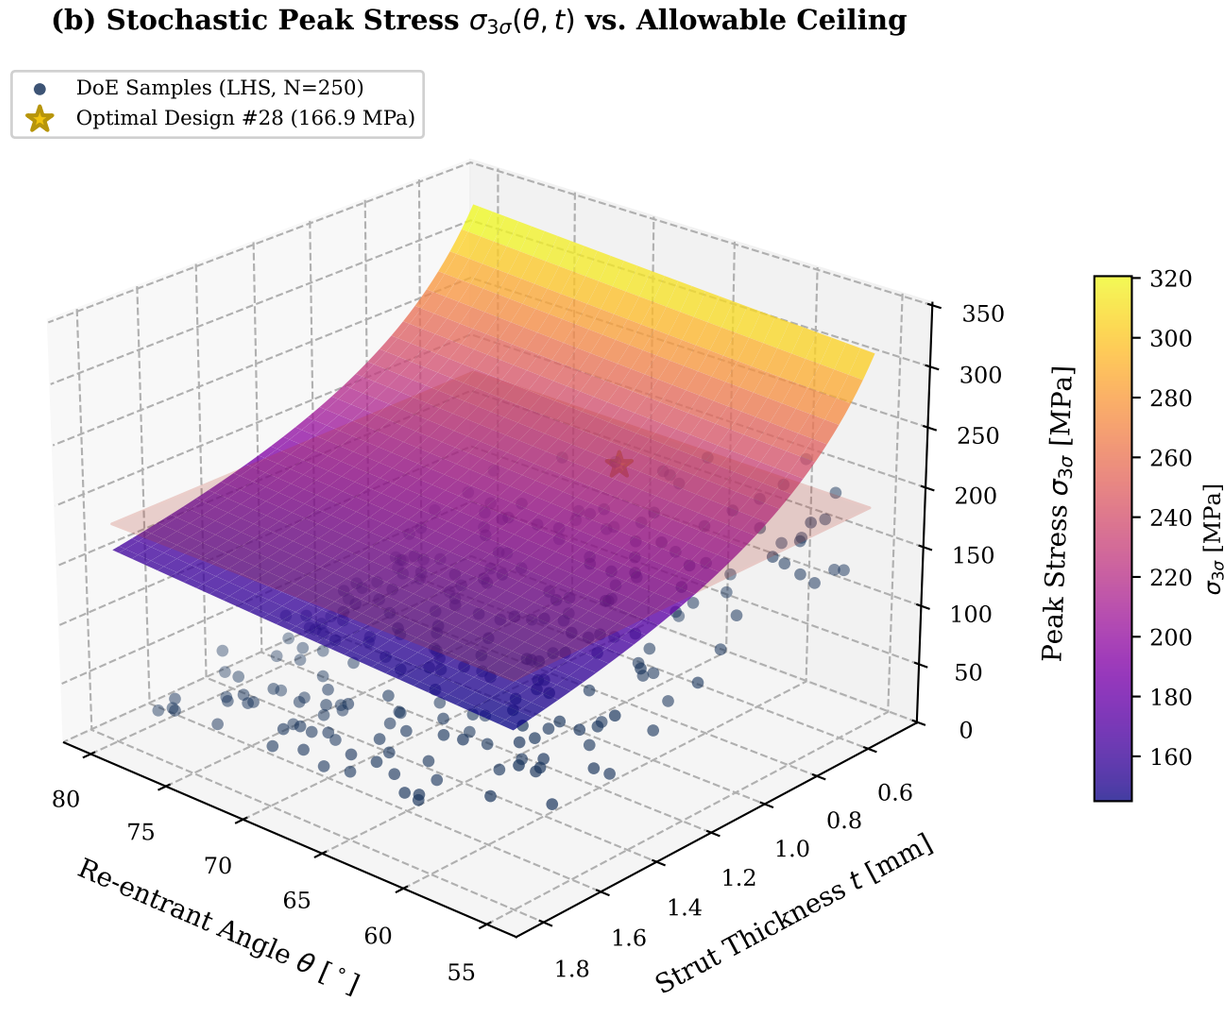

(a) First Natural Frequency $f_1(\theta, t)$ Surface
DoE Samples (LHS, N=250)
Optimal Design #28 (579.6 Hz)
Re-entrant Angle θ [°]
Strut Thickness t [mm]
Frequency f_1 [Hz]
f_1 [Hz]


(b) Stochastic Peak Stress $\sigma_{3\sigma}(\theta, t)$ vs. Allowable Ceiling
DoE Samples (LHS, N=250)
Optimal Design #28 (166.9 MPa)
Re-entrant Angle θ [°]
Strut Thickness t [mm]
Peak Stress $\sigma_{3\sigma}$ [MPa]
$\sigma_{3\sigma}$ [MPa]