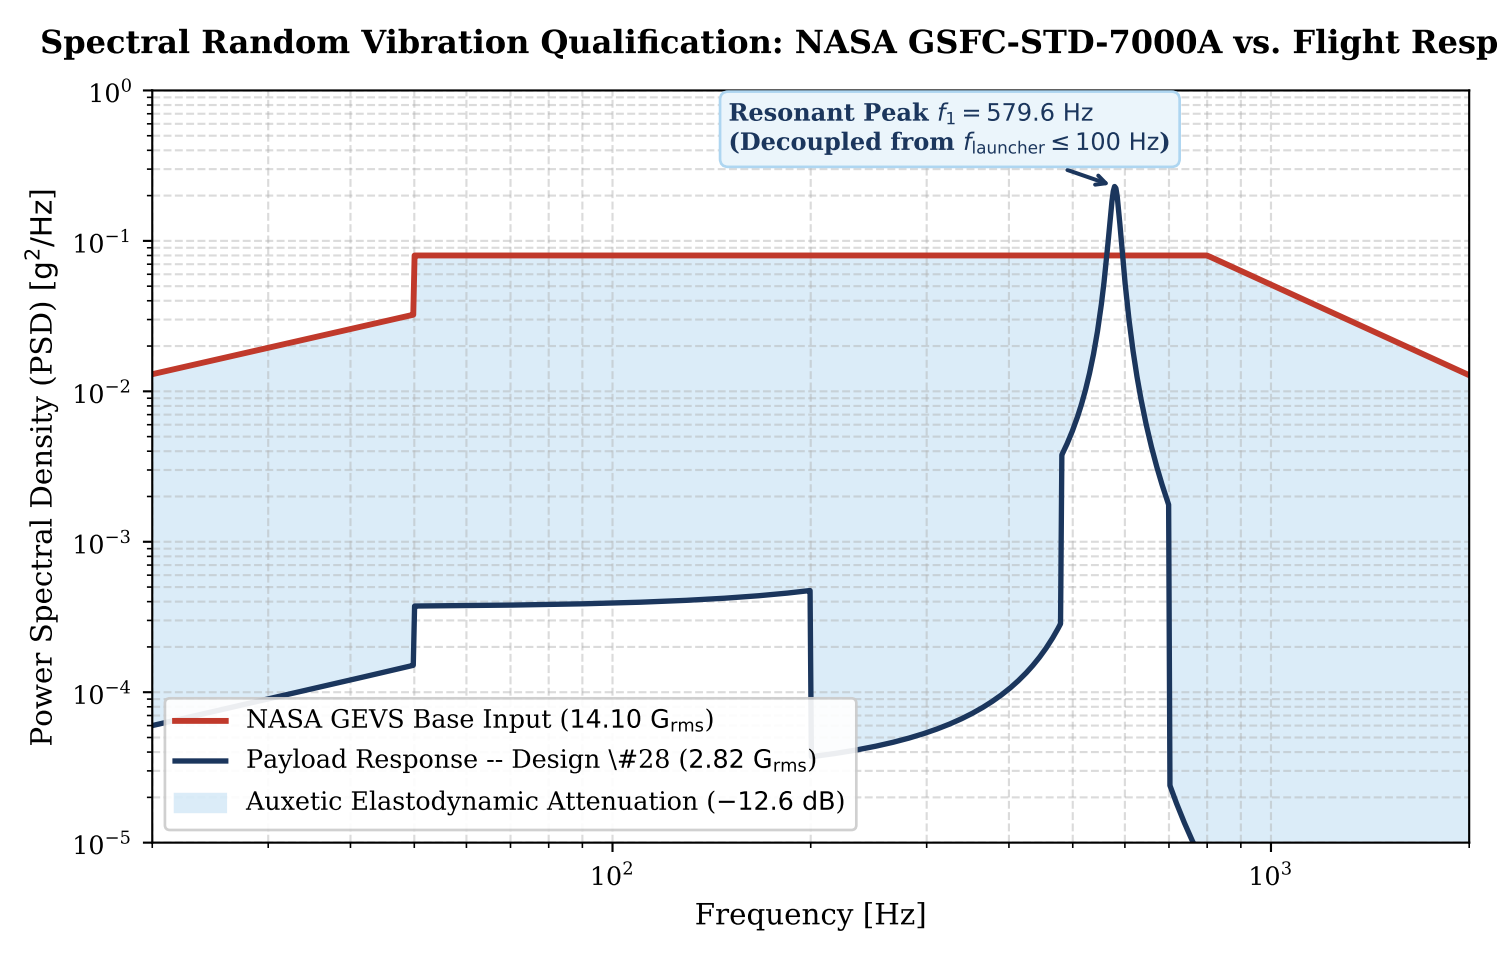

Spectral Random Vibration Qualification: NASA GSFC-STD-7000A vs. Flight Resp
Resonant Peak $f_1 = 579.6$ Hz
(Decoupled from $f_{launcher} \leq 100$ Hz)
NASA GEVS Base Input (14.10 $G_{rms}$)
Payload Response -- Design \#28 (2.82 $G_{rms}$)
Auxetic Elastodynamic Attenuation (−12.6 dB)
Power Spectral Density (PSD) [$g^2$/Hz]
Frequency [Hz]
$10^0$
$10^{-1}$
$10^{-2}$
$10^{-3}$
$10^{-4}$
$10^{-5}$
$10^2$
$10^3$