




Luminescent Clock v1.4

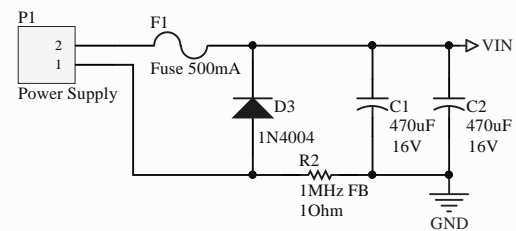



Power Supply block.
Input voltage on P1 should be in range 7.25..9 VDC.

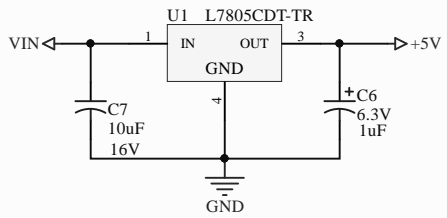

Stabilized 5 VDC power source for MCU and their peripherals.

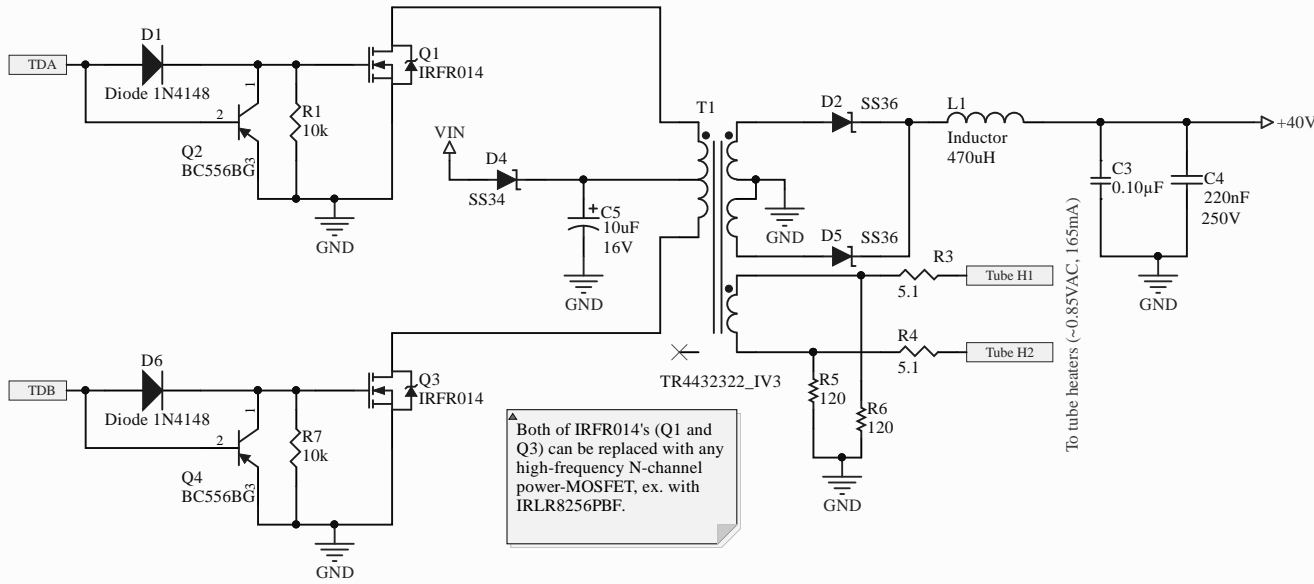

IV-3A luminescent 7-segment indicator tubes Power Supply block.

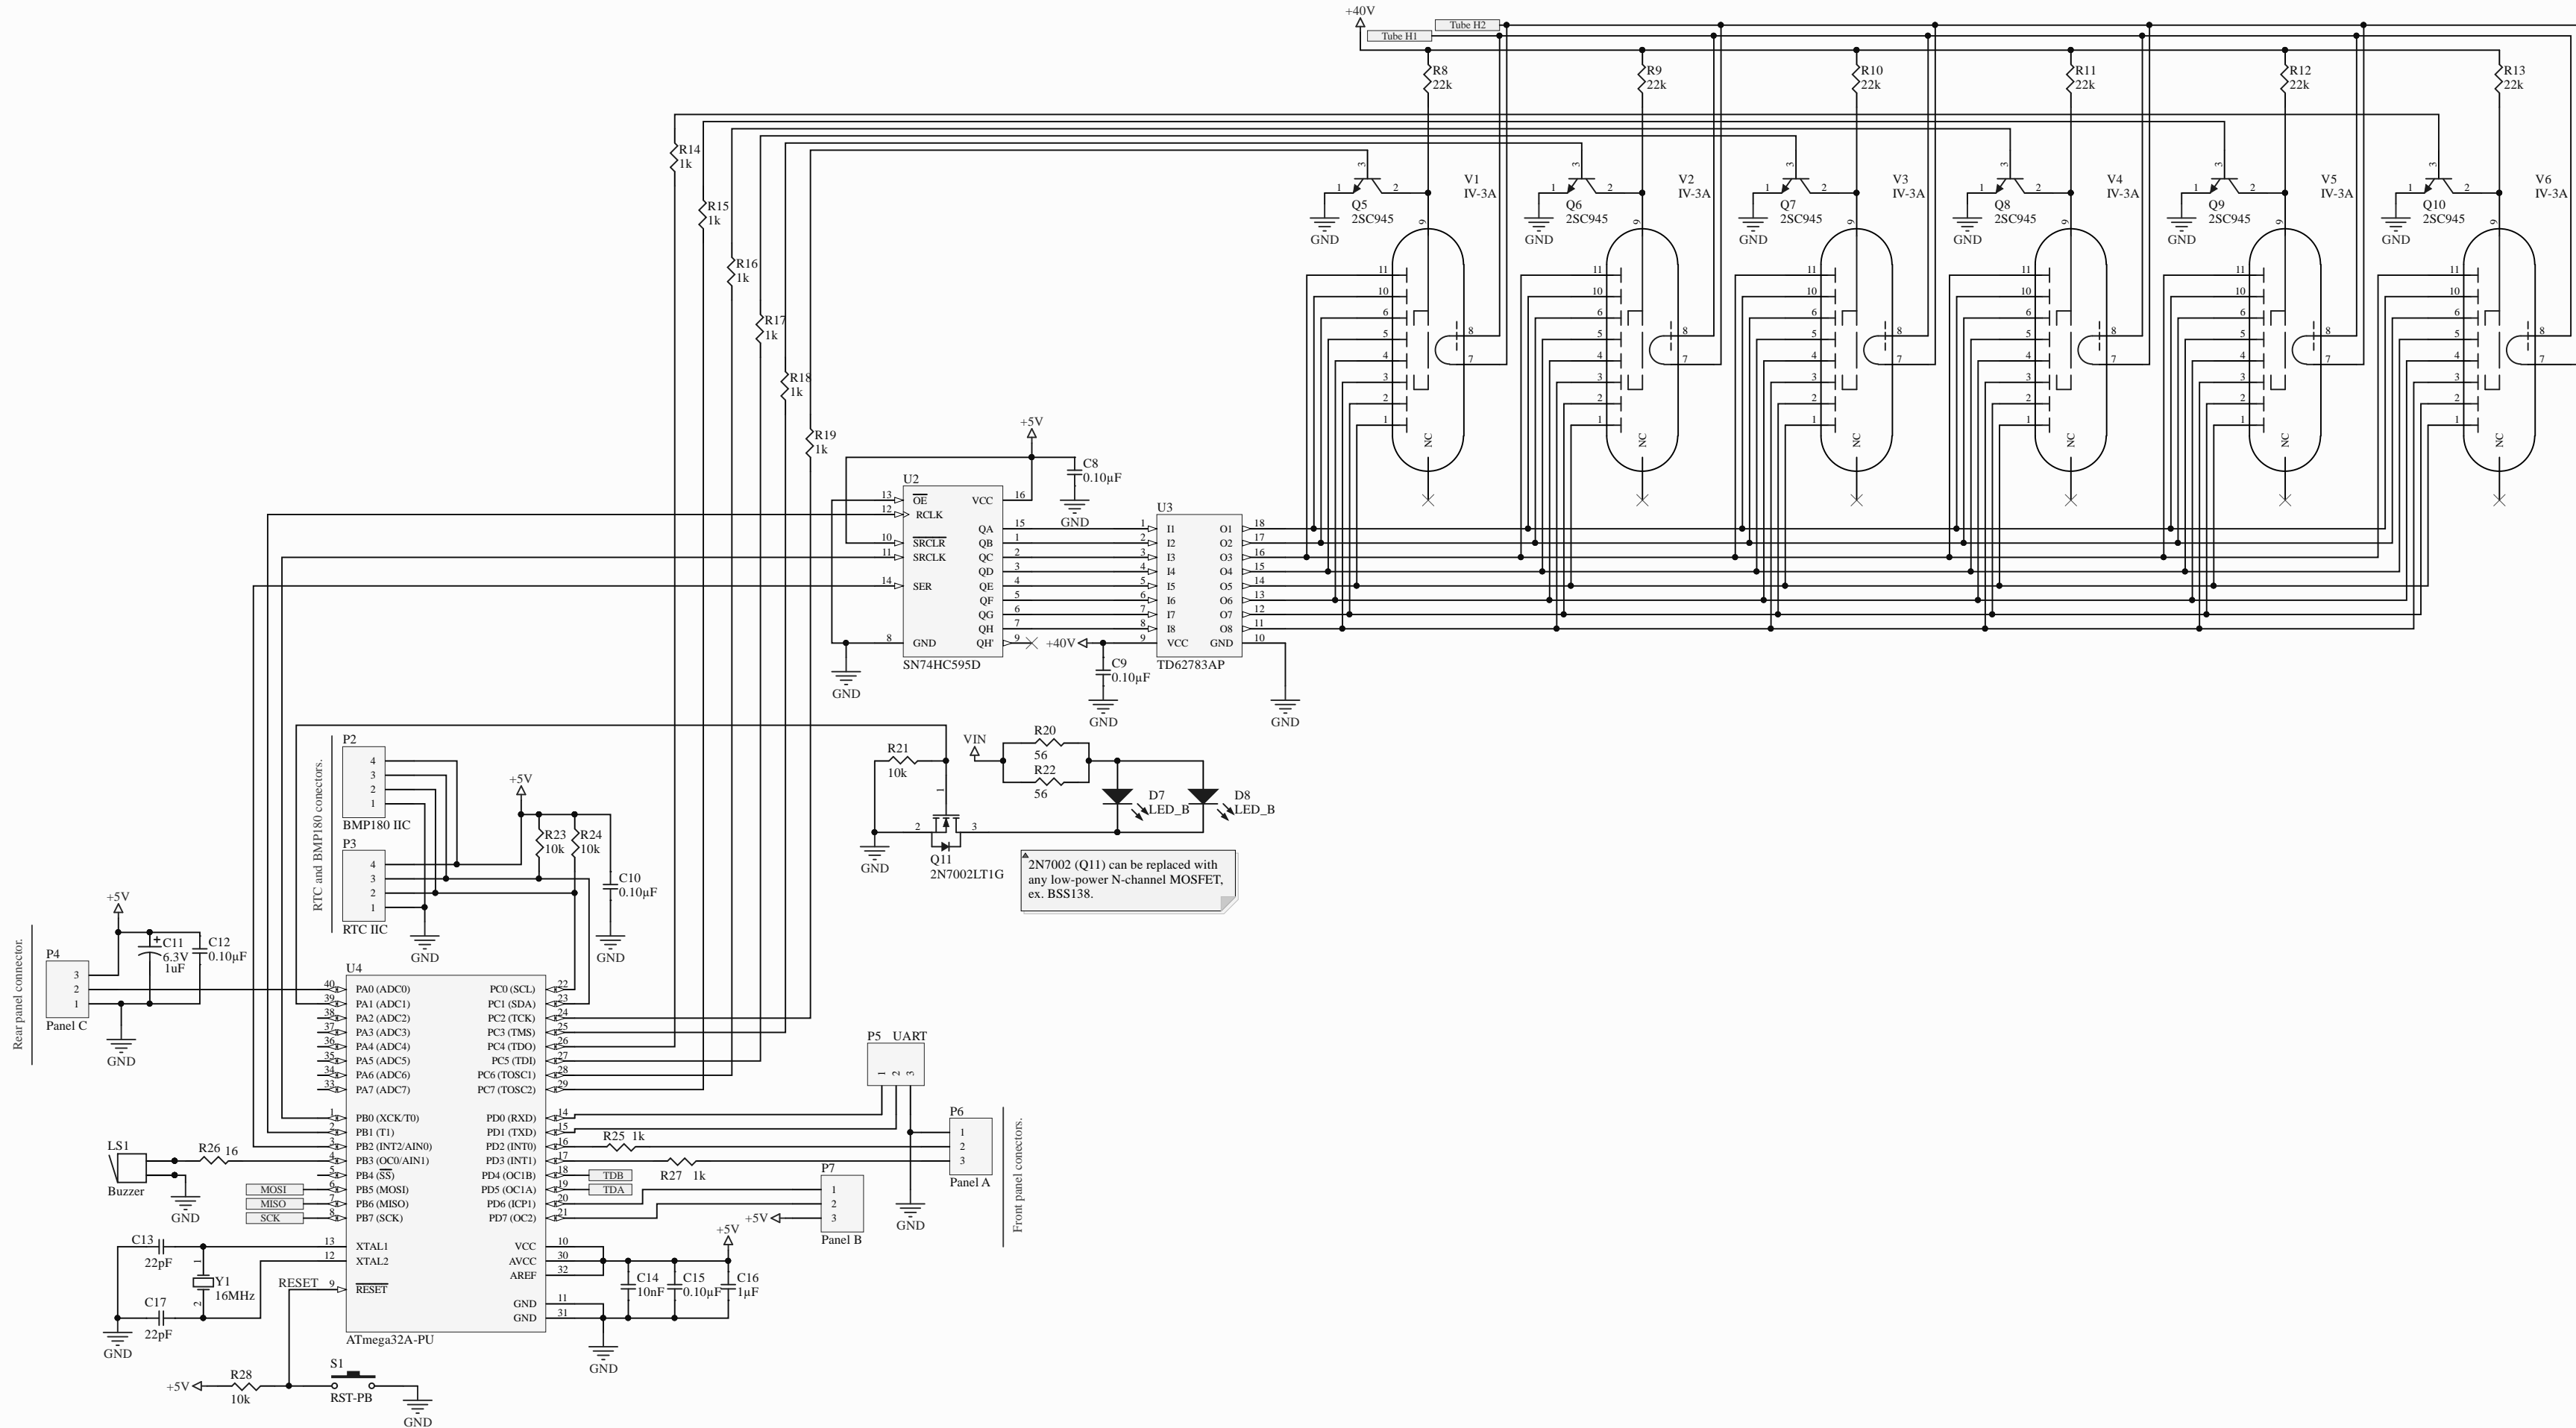

AVR ISP Programming port

Title		
Luminescent Clock		
Size	Number	Revision
A2		1.2b
Date:	25.07.2018	Sheet of
File:	C:\Users\... \Clock.SchDoc	Drawn By: Dr. Saldon

