



Frame Switch is used for an open collector to ground for frame advance
 LDR is for a light dependent resistor to control the display LCD brightness.
 +5V is output to LED's.
 Battery is in from the battery.

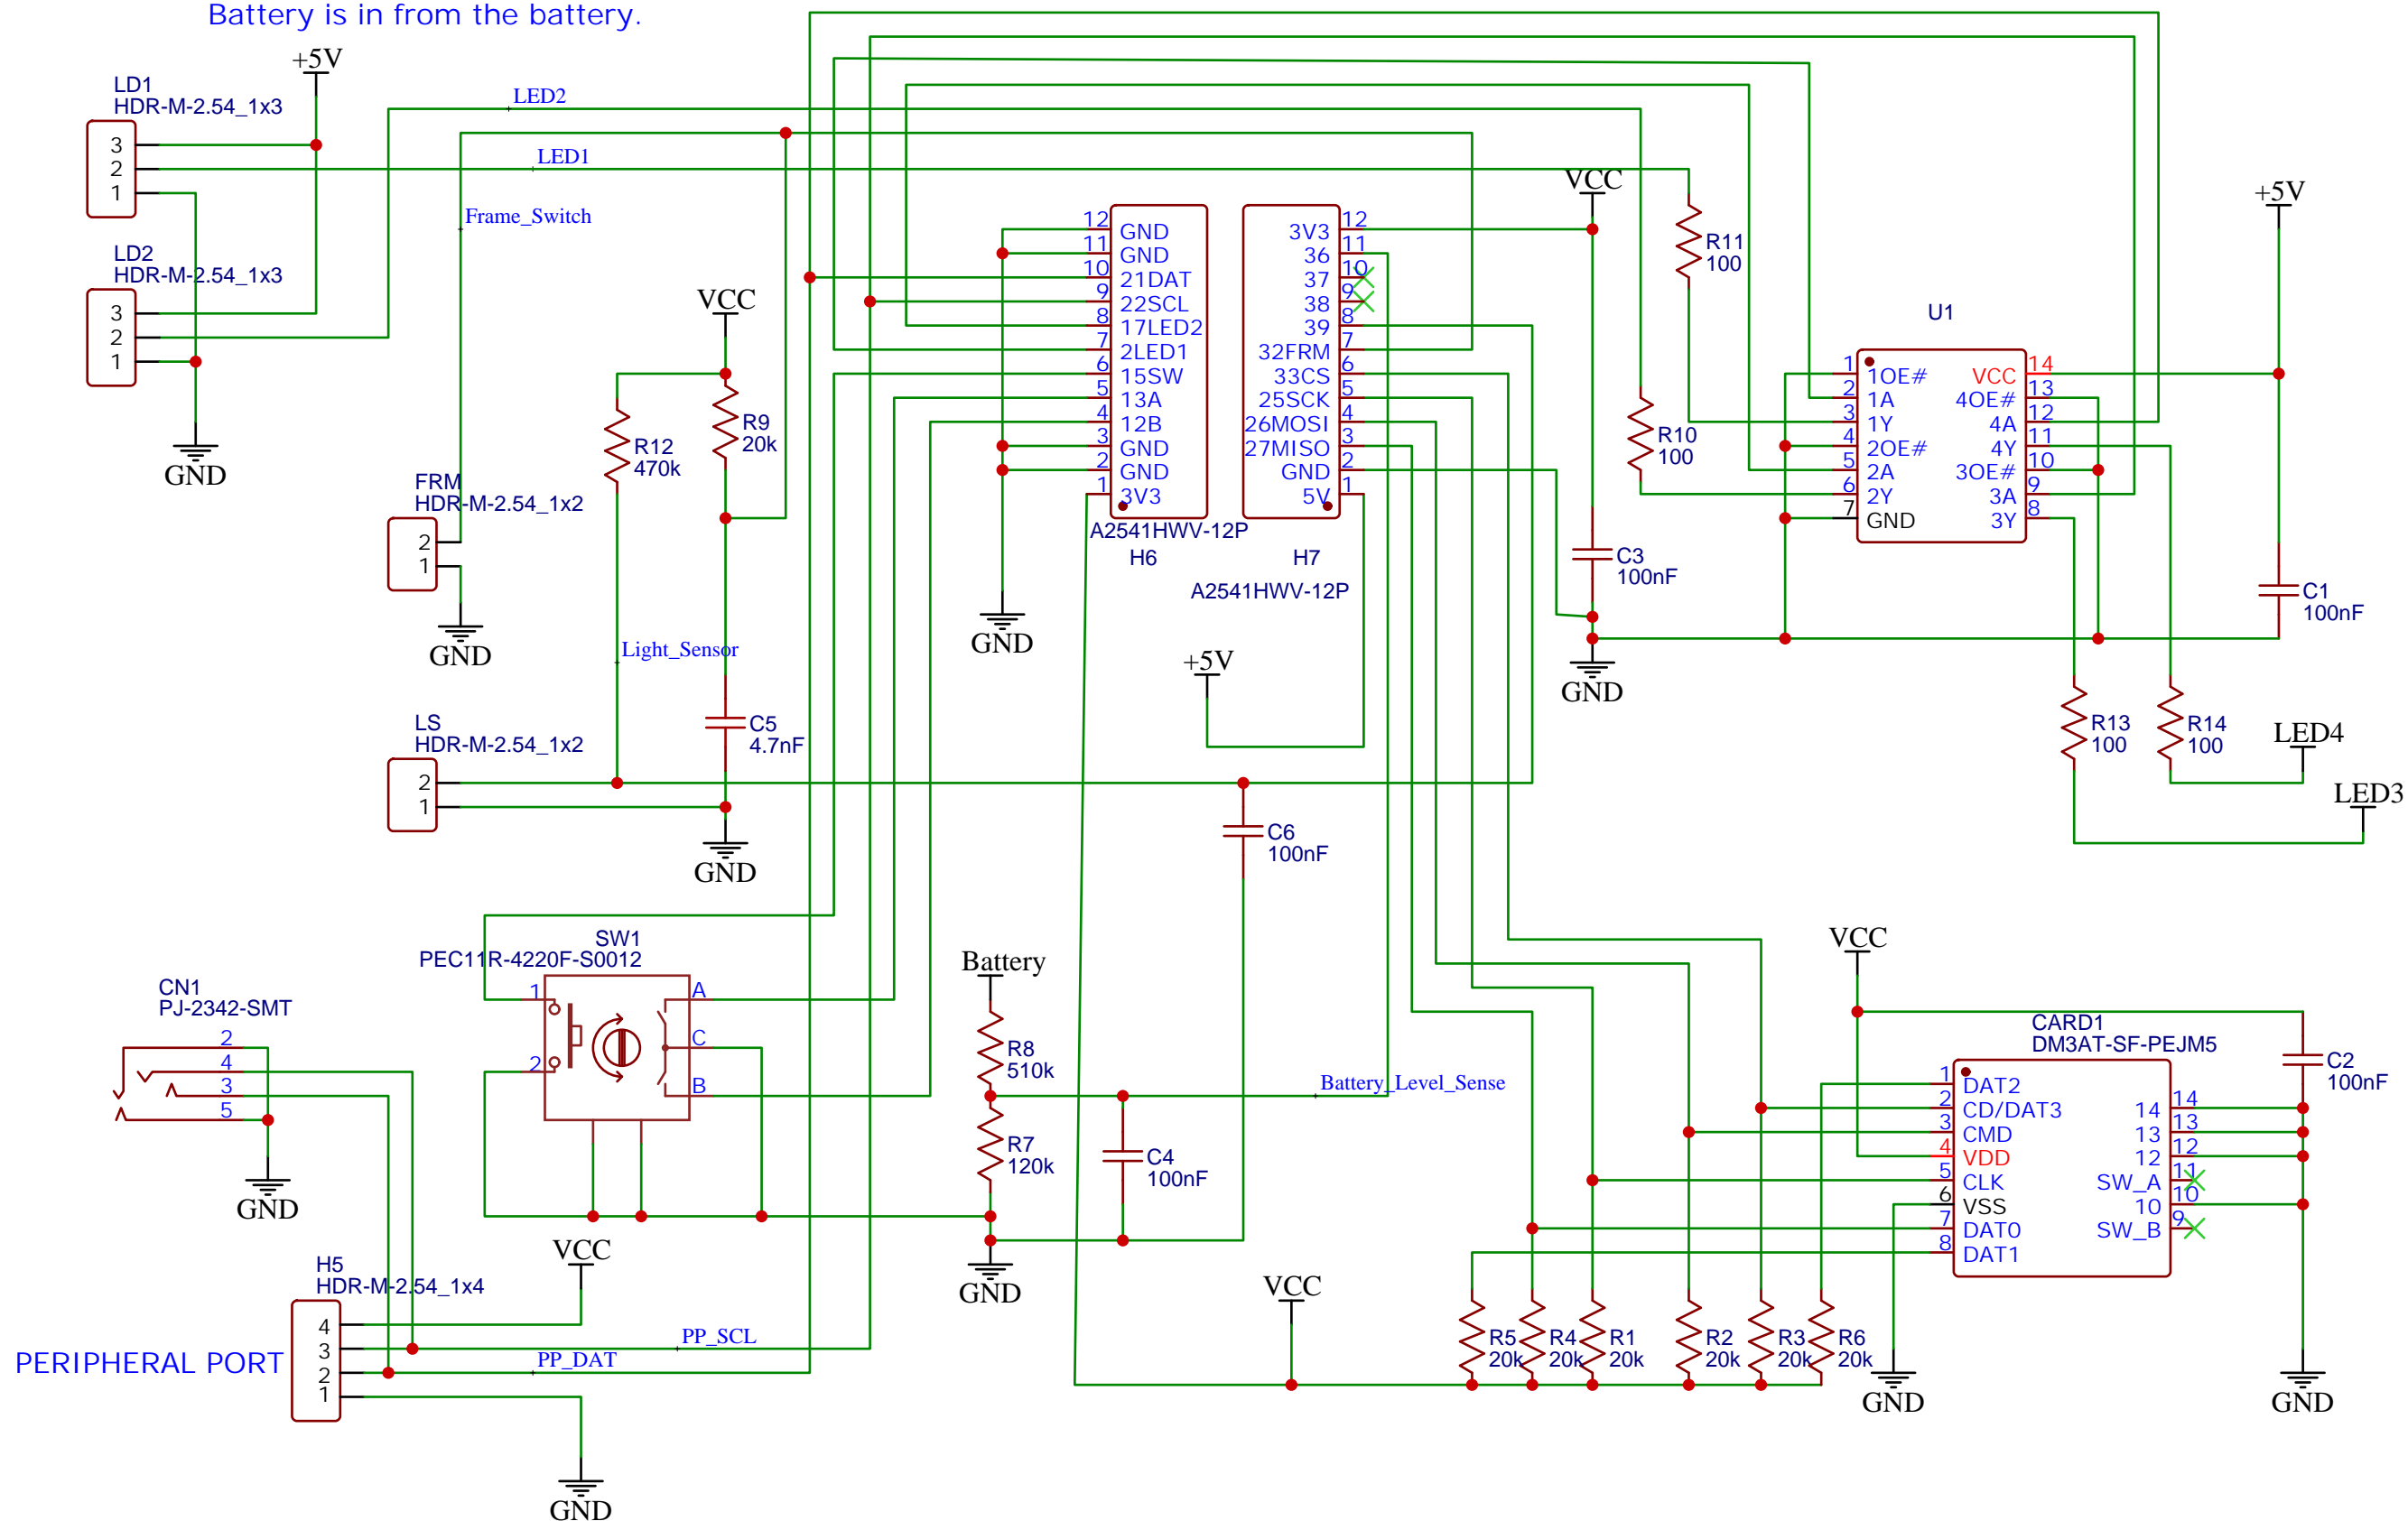

TITLE: ESP32_CIRCUIT With Power Supply and Dial		REV: 1.2
EasyEDA	Company: Nohr Photo	Sheet: 1/1
	Date: 2021-5-1	Drawn By: Martin Nohr

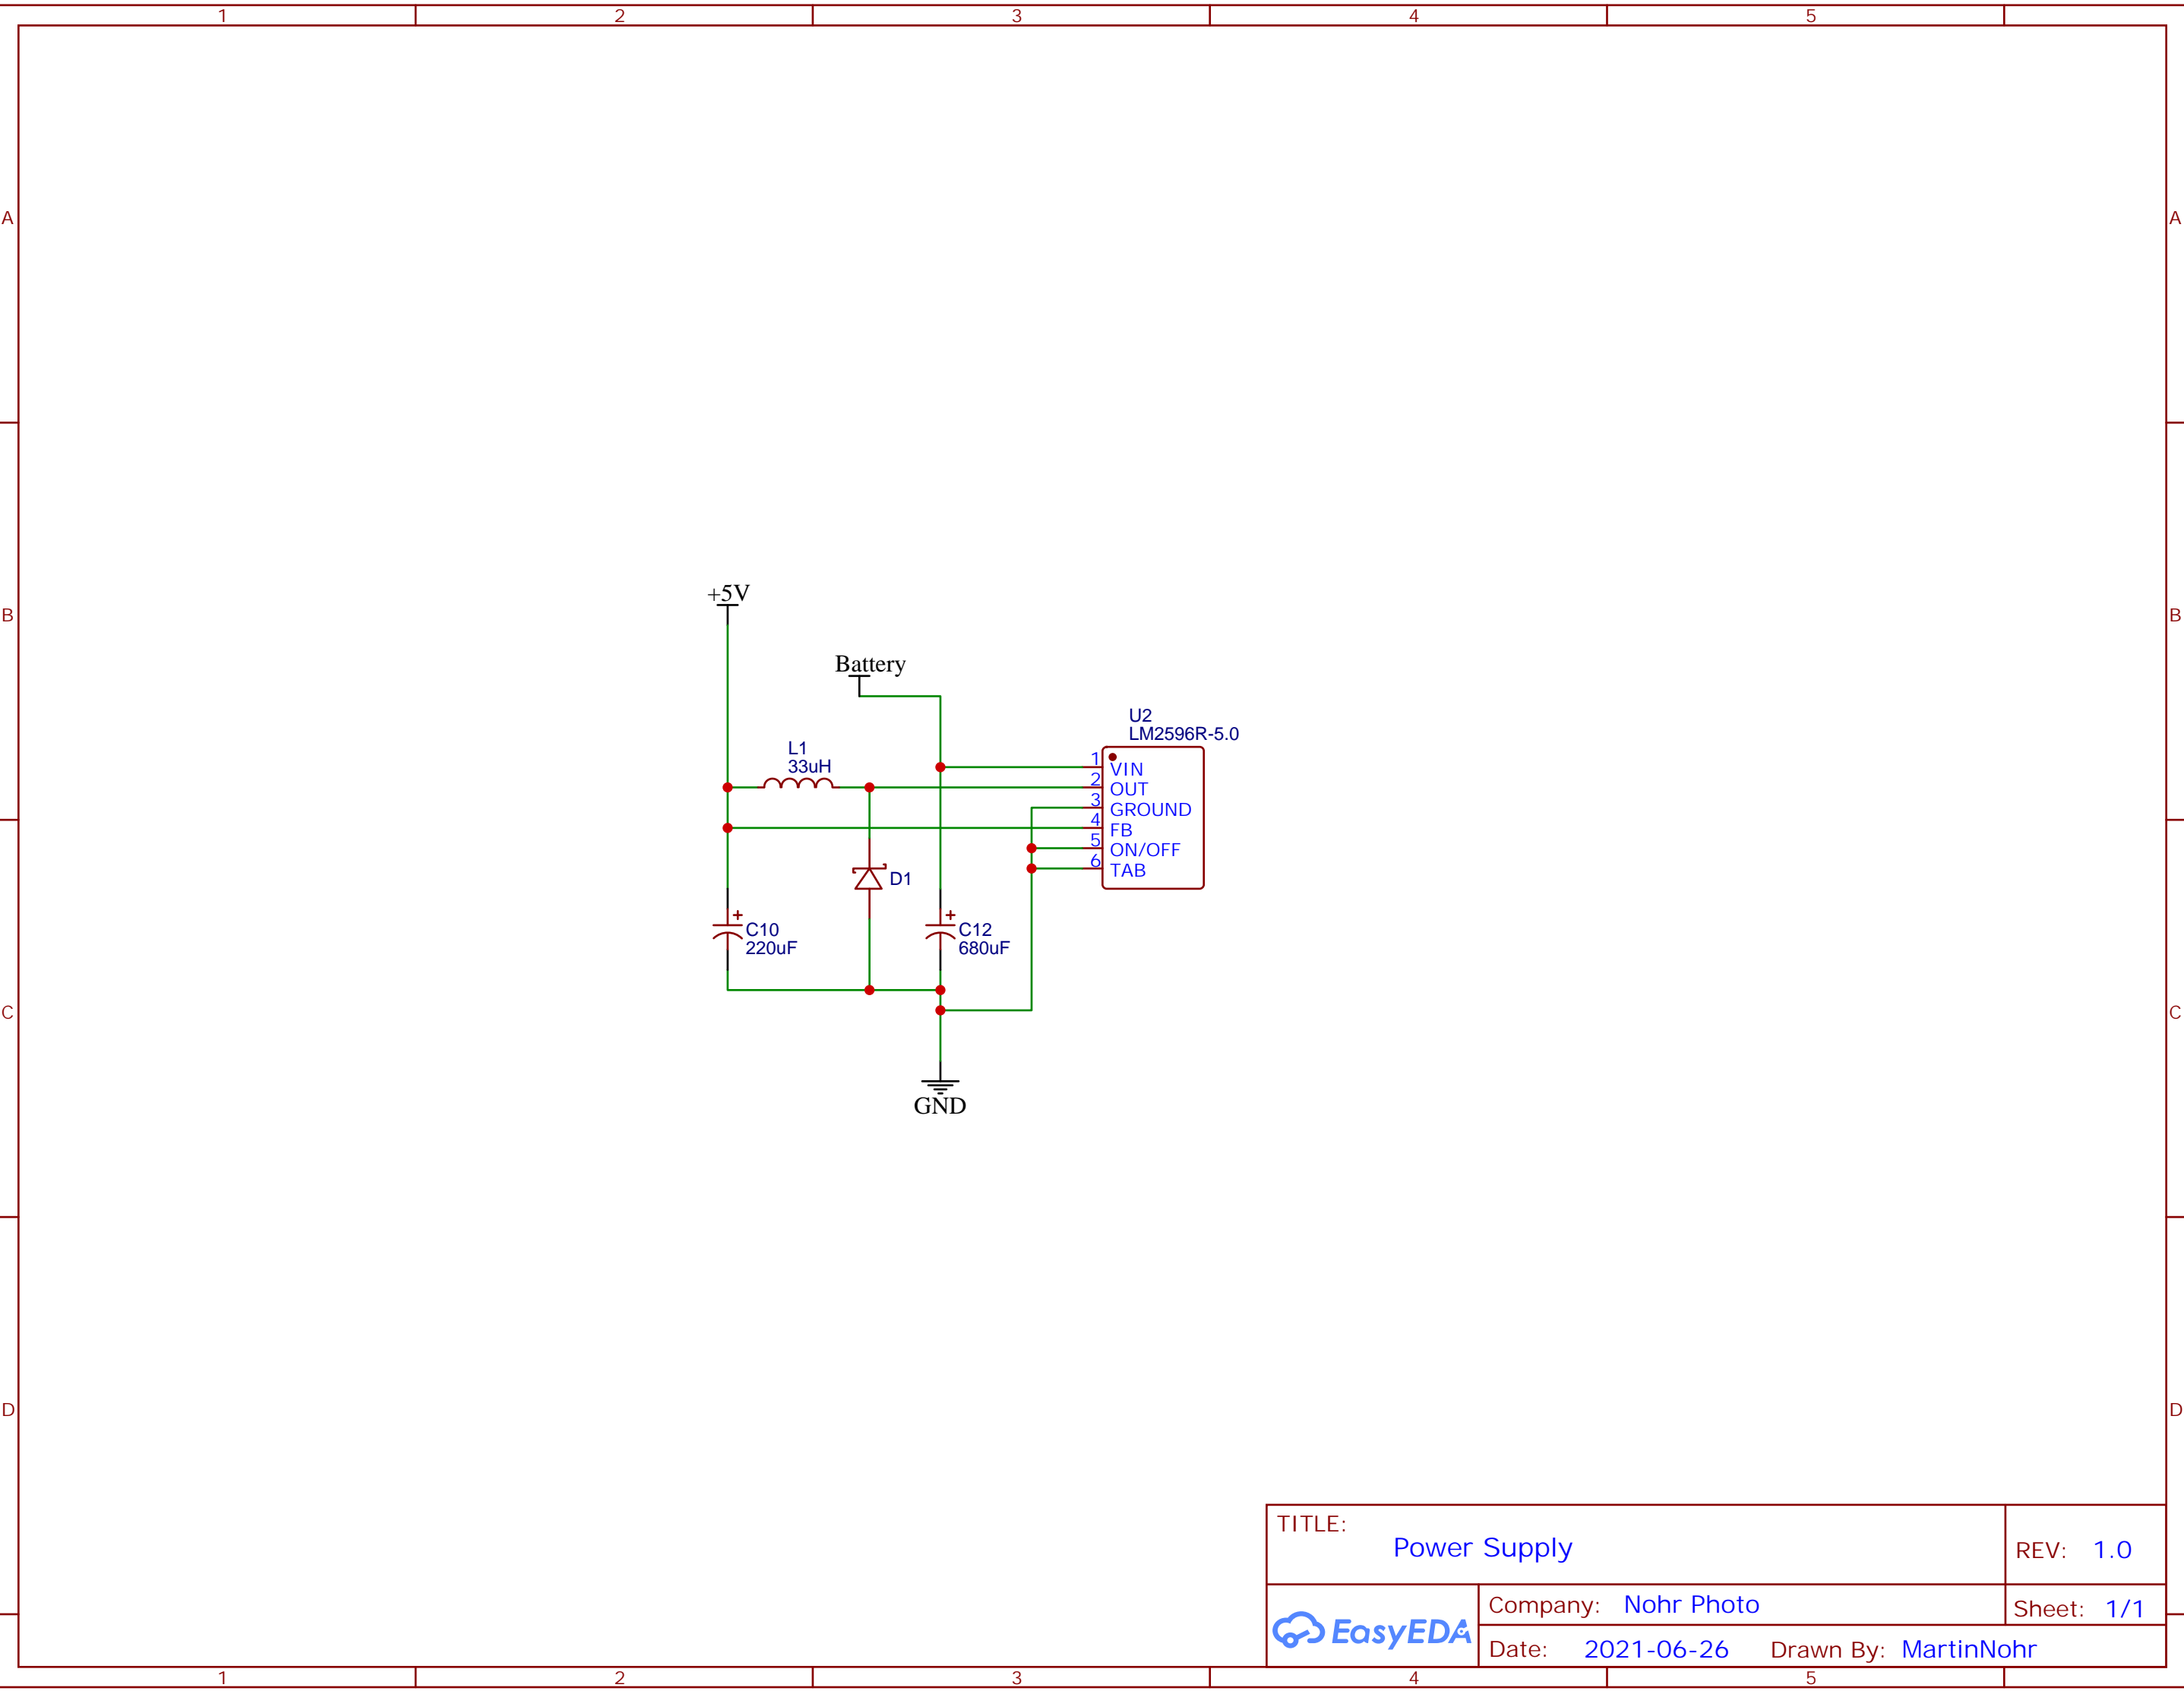

TITLE: Power Supply		REV: 1.0
	Company: Nohr Photo	Sheet: 1/1
	Date: 2021-06-26 Drawn By: MartinNohr	