



Pin 2 on H4 is used for an open collector to ground for frame advance  
H2 is for an LDR to control the display LCD brightness.  
The battery sensor is to detect the battery voltage. It does not power the device.

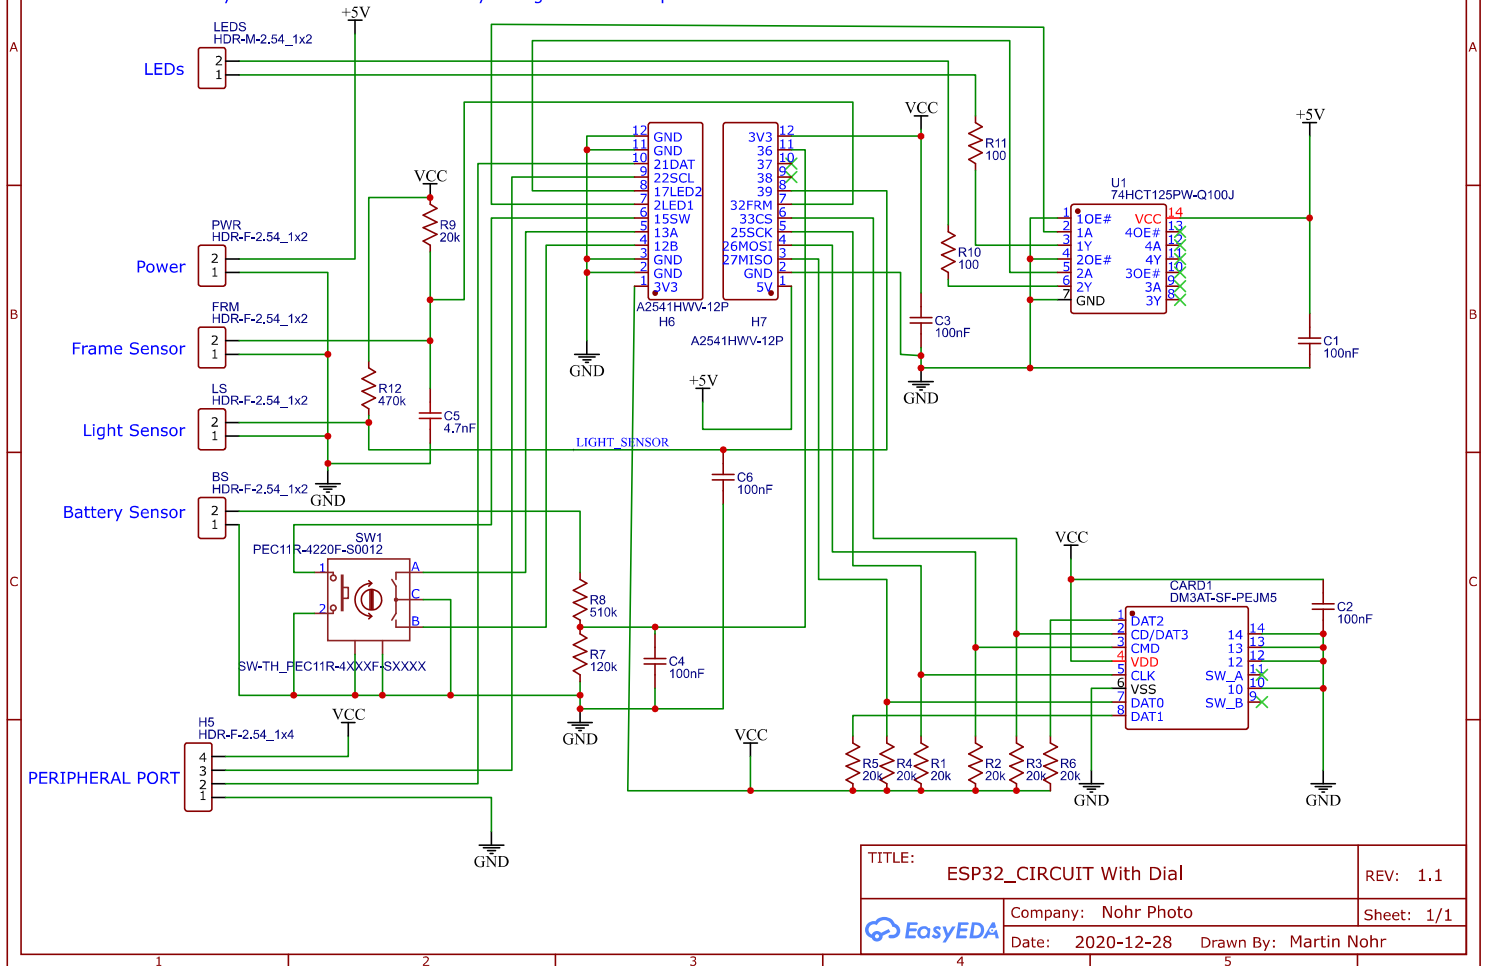

TITLE: ESP32_CIRCUIT With Dial		REV: 1.1
Company: Nohr Photo		Sheet: 1/1
Date: 2020-12-28	Drawn By: Martin Nohr	

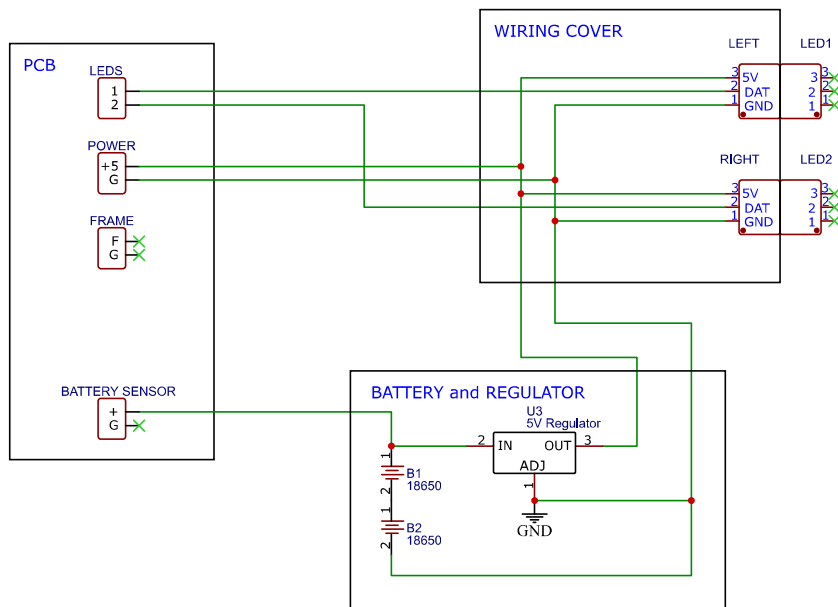

TITLE: External Wiring		REV: 1.1
Company: Nohr Photo		Sheet: 1/1
Date: 2020-09-08	Drawn By: MartinNohr	