CD74HC175, CD74HCT175

High Speed CMOS Logic
Quad D-Type Flip-Flop with Reset

August 1997

Features

- **Common Clock and Asynchronous Reset on Four D-Type Flip-Flops**

- **Positive Edge Pulse Triggering**

- **Complementary Outputs**

- **Buffered Inputs**

- **Typical f_{MAX} = 50MHz at V_{CC} = 5V, C_L = 15pF, $T_A = 25^oC$**

- **Fanout (Over Temperature Range)**
  - **Standard Outputs . . . . 10 LSTTL Loads**
  - **Bus Driver Outputs . . . . 15 LSTTL Loads**

- **Wide Operating Temperature Range . . . -55^oC to 125^oC**

- **Balanced Propagation Delay and Transition Times**

- **Significant Power Reduction Compared to LSTTL Logic ICs**

- **HC Types**
  - **2V to 6V Operation**
  - **High Noise Immunity: N_{IL} = 30%, N_{IH} = 30% of V_{CC} at V_{CC} = 5V**

- **HCT Types**
  - **4.5V to 5.5V Operation**
  - **Direct LSTTL Input Logic Compatibility, V_{IL} = 0.8V (Max), V_{IH} = 2V (Min)**
  - **CMOS Input Compatibility, $I_I \leq 1\mu A$ at V_{OL}, V_{OH}**

Description

The Harris CD74HC175 and CD74HCT175 are high speed Quad D-type Flip-Flops with individual D-inputs and Q, $\overline{Q}$ complementary outputs. The devices are fabricated using silicon gate CMOS technology. They have the low power consumption advantage of standard CMOS ICs and the ability to drive 10 LSTTL devices.

Information at the D input is transferred to the Q, $\overline{Q}$ outputs on the positive going edge of the clock pulse. All four Flip-Flops are controlled by a common clock (CP) and a common reset ($\overline{MR}$). Resetting is accomplished by a low voltage level independent of the clock. All four Q outputs are reset to a logic 0 and all four $\overline{Q}$ outputs to a logic 1.
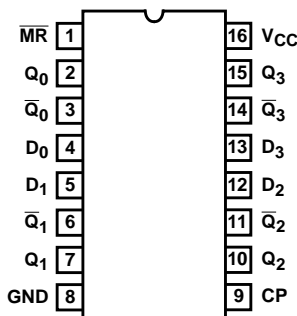
Ordering Information

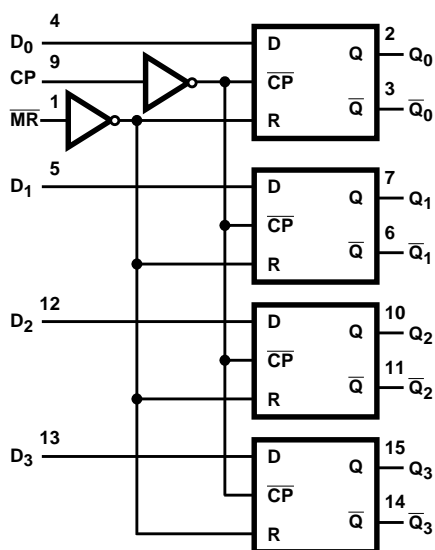| PART NUMBER	TEMP. RANGE (^oC)	PACKAGE	PKG. NO.
CD74HC175E	-55 to 125	16 Ld PDIP	E16.3
CD74HCT175E	-55 to 125	16 Ld PDIP	E16.3
CD74HC175M	-55 to 125	16 Ld SOIC	M16.15
CD74HCT175M	-55 to 125	16 Ld SOIC	M16.15
CD74HCT175W	-55 to 125	Wafer	

NOTES:

1. When ordering, use the entire part number. Add the suffix 96 to obtain the variant in the tape and reel.

2. Die for this part number is available which meets all electrical specifications. Please contact your local sales office or Harris customer service for ordering information.

Pinout

CD74HC175, CD74HCT175
(PDIP, SOIC)
TOP VIEW

Left	Pin		Pin	Right
$\overline{MR}$	1		16	V_{CC}
Q_0	2		15	Q_3
$\overline{Q}_0$	3		14	$\overline{Q}_3$
D_0	4		13	D_3
D_1	5		12	D_2
$\overline{Q}_1$	6		11	$\overline{Q}_2$
Q_1	7		10	Q_2
GND	8		9	CP

File Number **1474.1**

1

Functional Diagram

TRUTH TABLE

INPUTS			OUTPUTS	
RESET ($\overline{MR}$)	CLOCK CP	DATA D_n	Q_n	$\overline{Q}_n$
L	X	X	L	H
H	↑	H	H	L
H	↑	L	L	H
H	L	X	Q_0	$\overline{Q}_0$

NOTE: H = High Voltage Level, L = Low Voltage Level, X = Don't Care, ↑ = Transition from Low to High Level, Q_0 = Level Before the Indicated Steady-State Input Conditions Were Established.

Logic Diagram
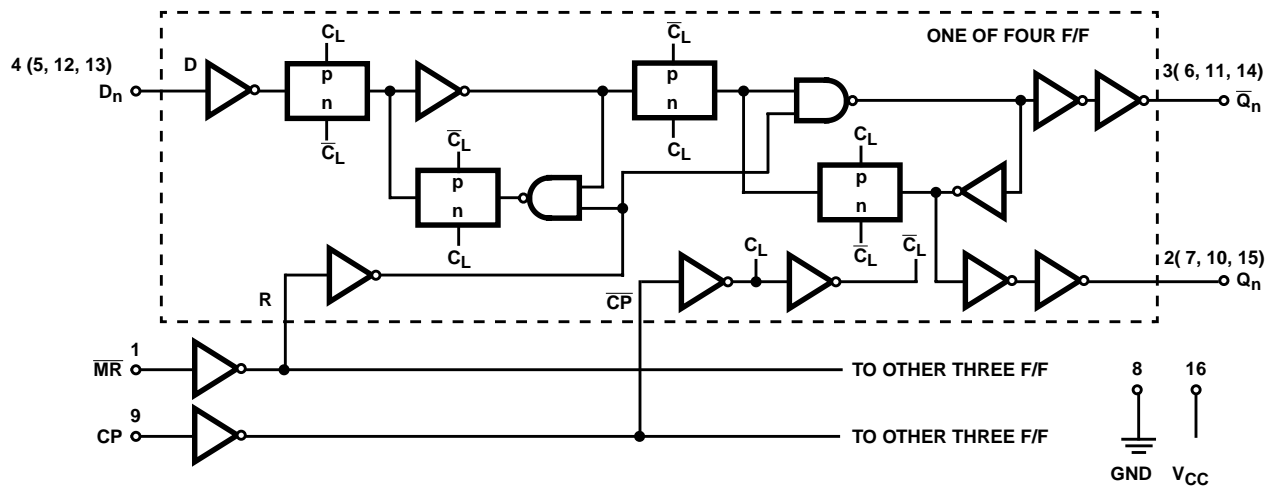
CD74HC175, CD74HCT175

Absolute Maximum Ratings

DC Supply Voltage, V_{CC} . . . . -0.5V to 7V
DC Input Diode Current, I_{IK}
   For V_I < -0.5V or V_I > V_{CC} + 0.5V . . . . ±20mA
DC Output Diode Current, I_{OK}
   For V_O < -0.5V or V_O > V_{CC} + 0.5V . . . . ±20mA
DC Output Source or Sink Current per Output Pin, I_O
   For V_O > -0.5V or V_O < V_{CC} + 0.5V . . . . ±25mA
DC V_{CC} or Ground Current, $I_{CC\ or\ }I_{GND}$ . . . . ±50mA

Operating Conditions

Temperature Range (T_A) . . . . -55^{o}C to 125^{o}C
Supply Voltage Range, V_{CC}
   HC Types . . . . .2V to 6V
   HCT Types . . . . .4.5V to 5.5V
DC Input or Output Voltage, V_I, V_O . . . . 0V to V_{CC}
Input Rise and Fall Time
   2V . . . . 1000ns (Max)
   4.5V. . . . . 500ns (Max)
   6V . . . . 400ns (Max)

Thermal Information

Thermal Resistance (Typical, Note 3)	θ_{JA} (^{o}C/W)
PDIP Package	90
SOIC Package	110

Maximum Junction Temperature . . . . 150^{o}C
Maximum Storage Temperature Range . . . .-65^{o}C to 150^{o}C
Maximum Lead Temperature (Soldering 10s) . . . . 300^{o}C
  (SOIC - Lead Tips Only)

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

NOTE:

3. θ_{JA} is measured with the component mounted on an evaluation PC board in free air.

DC Electrical Specifications

PARAMETER	SYMBOL	TEST CONDITIONS V_I (V)	I_O (mA)	V_{CC} (V)	25^{o}C MIN	TYP	MAX	-40^{o}C TO +85^{o}C MIN	MAX	-55^{o}C TO 125^{o}C MIN	MAX	UNITS
HC TYPES												
High Level Input Voltage	V_{IH}	-	-	2	1.5	-	-	1.5	-	1.5	-	V
				4.5	3.15	-	-	3.15	-	3.15	-	V
				6	4.2	-	-	4.2	-	4.2	-	V
Low Level Input Voltage	V_{IL}	-	-	2	-	-	0.5	-	0.5	-	0.5	V
				4.5	-	-	1.35	-	1.35	-	1.35	V
				6	-	-	1.8	-	1.8	-	1.8	V
High Level Output Voltage CMOS Loads	V_{OH}	V_{IH} or V_{IL}	-0.02	2	1.9	-	-	1.9	-	1.9	-	V
			-0.02	4.5	4.4	-	-	4.4	-	4.4	-	V
			-0.02	6	5.9	-	-	5.9	-	5.9	-	V
High Level Output Voltage TTL Loads			-4	4.5	3.98	-	-	3.84	-	3.7	-	V
			-5.2	6	5.48	-	-	5.34	-	5.2	-	V
Low Level Output Voltage CMOS Loads	V_{OL}	V_{IH} or V_{IL}	0.02	2	-	-	0.1	-	0.1	-	0.1	V
			0.02	4.5	-	-	0.1	-	0.1	-	0.1	V
			0.02	6	-	-	0.1	-	0.1	-	0.1	V
Low Level Output Voltage TTL Loads			4	4.5	-	-	0.26	-	0.33	-	0.4	V
			5.2	6	-	-	0.26	-	0.33	-	0.4	V
Input Leakage Current	I_I	V_{CC} or GND	-	6	-	-	±0.1	-	±1	-	±1	µA
Quiescent Device Current	I_{CC}	V_{CC} or GND	0	6	-	-	8	-	80	-	160	µA

DC Electrical Specifications   (Continued)

PARAMETER	SYMBOL	TEST CONDITIONS V_I (V)	I_O (mA)	V_{CC} (V)	25^{o}C MIN	TYP	MAX	-40^{o}C TO +85^{o}C MIN	MAX	-55^{o}C TO 125^{o}C MIN	MAX	UNITS
HCT TYPES												
High Level Input Voltage	V_{IH}	-	-	4.5 to 5.5	2	-	-	2	-	2	-	V
Low Level Input Voltage	V_{IL}	-	-	4.5 to 5.5	-	-	0.8	-	0.8	-	0.8	V
High Level Output Voltage CMOS Loads	V_{OH}	V_{IH} or V_{IL}	-0.02	4.5	4.4	-	-	4.4	-	4.4	-	V
High Level Output Voltage TTL Loads			-4	4.5	3.98	-	-	3.84	-	3.7	-	V
Low Level Output Voltage CMOS Loads	V_{OL}	V_{IH} or V_{IL}	0.02	4.5	-	-	0.1	-	0.1	-	0.1	V
Low Level Output Voltage TTL Loads			4	4.5	-	-	0.26	-	0.33	-	0.4	V
Input Leakage Current	I_I	V_{CC} to GND	0	5.5	-	-	±0.1	-	±1	-	±1	μA
Quiescent Device Current	I_{CC}	V_{CC} or GND	0	5.5	-	-	8	-	80	-	160	μA
Additional Quiescent Device Current Per Input Pin: 1 Unit Load (Note 4)	ΔI_{CC}	V_{CC} -2.1	-	4.5 to 5.5	-	100	360	-	450	-	490	μA

NOTES:

4. For dual-supply systems theorectical worst case (V_I = 2.4V, V_{CC} = 5.5V) specification is 1.8mA.

5. Die for this part number is available which meets all electrical specifications.

HCT Input Loading Table

INPUT	UNIT LOADS
$\overline{MR}$	1
CP	0.60
D	0.15

NOTE: Unit Load is ΔI_{CC} limit specified in DC Electrical Specifications table, e.g. 360μA max at 25^{o}C.

Prerequisite For Switching Specifications

PARAMETER	SYMBOL	TEST CONDITIONS	V_{CC} (V)	25^{o}C MIN	TYP	MAX	-40^{o}C TO 85^{o}C MIN	MAX	-55^{o}C TO 125^{o}C MIN	MAX	UNITS
HC TYPES											
Clock Pulse Width	t_W	-	2	80	-	-	100	-	120	-	ns
			4.5	16	-	-	20	-	24	-	ns
			6	14	-	-	17	-	20	-	ns
$\overline{MR}$ Pulse Width	t_W	-	2	80	-	-	100	-	120	-	ns
			4.5	16	-	-	20	-	24	-	ns
			6	14	-	-	17	-	20	-	ns

Prerequisite For Switching Specifications   (Continued)

PARAMETER	SYMBOL	TEST CONDITIONS	V_CC (V)	25°C MIN	25°C TYP	25°C MAX	-40°C TO 85°C MIN	-40°C TO 85°C MAX	-55°C TO 125°C MIN	-55°C TO 125°C MAX	UNITS
Setup Time, Data to Clock	t_{SU}	-	2	80	-	-	100	-	120	-	ns
			4.5	16	-	-	20	-	24	-	ns
			6	14	-	-	17	-	20	-	ns
Hold Time, Data to Clock	t_H	-	2	5	-	-	5	-	5	-	ns
			4.5	5	-	-	5	-	5	-	ns
			6	5	-	-	5	-	5	-	ns
Removal Time, $\overline{MR}$ to Clock	t_{REM}	-	2	5	-	-	5	-	5	-	ns
			4.5	5	-	-	5	-	5	-	ns
			6	5	-	-	5	-	5	-	ns
Clock Frequency	f_{MAX}	-	2	6	-	-	5	-	4	-	MHz
			4.5	30	-	-	25	-	20	-	MHz
			6	35	-	-	29	-	23	-	MHz
HCT TYPES											
Clock Pulse Width	t_W	-	4.5	20	-	-	25	-	30	-	ns
$\overline{MR}$ Pulse Width	t_W	-	4.5	20	-	-	25	-	30	-	ns
Setup Time Data to Clock	t_{SU}	-	4.5	20	-	-	25	-	30	-	ns
Hold Time Data to Clock	t_H	-	4.5	5	-	-	5	-	5	-	ns
Removal Time $\overline{MR}$ to Clock	t_{REM}	-	4.5	5	-	-	5	-	5	-	ns
Clock Frequency	f_{MAX}	-	4.5	25	-	-	20	-	16	-	MHz

Switching Specifications   Input t_r, t_f = 6ns

PARAMETER	SYMBOL	TEST CONDITIONS	V_CC (V)	25°C TYP	25°C MAX	-40°C TO 85°C MAX	-55°C TO 125°C MAX	UNITS
HC TYPES								
Propagation Delay, Clock to Q or $\overline{Q}$	t_{PLH}, t_{PHL}	C_L = 50pF	2	-	175	220	265	ns
			4.5	-	35	44	53	ns
			6	-	30	37	45	ns
		C_L = 15pF	5	14	-	-	-	ns
Propagation Delay, $\overline{MR}$ to Q or $\overline{Q}$	t_{PLH}, t_{PHL}	C_L = 50pF	2	-	175	220	265	ns
			4.5	-	35	44	53	ns
			6	-	30	37	45	ns
		C_L = 15pF	5	14	-	-	-	ns
Output Transition Times	t_{TLH}, t_{THL}	C_L = 50pF	2	-	75	95	110	ns
			4.5	-	15	19	22	ns
			6	-	13	16	19	ns
Input Capacitance	C_{IN}	-	-	-	10	10	10	pF
Power Dissipation Capacitance (Notes 6, 7)	C_{PD}	-	5	65	-	-	-	pF

Switching Specifications Input t_r, t_f = 6ns **(Continued)**

PARAMETER	SYMBOL	TEST CONDITIONS	V_{CC} (V)	25°C		-40°C TO 85°C	-55°C TO 125°C	UNITS
				TYP	MAX	MAX	MAX	
HCT TYPES								
Propagation Delay, Clock to Q or $\overline{Q}$	t_{PLH}, t_{PHL}	C_L = 50pF	4.5	-	33	41	50	ns
		C_L = 15pF	5	13	-	-	-	ns
Propagation Delay, $\overline{MR}$ to Q or $\overline{Q}$	t_{PLH}, t_{PHL}	C_L = 50pF	4.5	-	35	44	53	ns
		C_L = 15pF	5	17	-	-	-	ns
Output Transition Times	t_{TLH}, t_{THL}	C_L = 50pF	4.5	-	15	19	22	ns
Input Capacitance	C_{IN}	-	-	-	10	10	10	pF
Power Dissipation Capacitance (Notes 6, 7)	C_{PD}	-	5	67	-	-	-	pF

NOTES:

6. C_{PD} is used to determine the dynamic power consumption, per flip-flop.

7. $P_D = V_{CC}^2 f_i + \sum (C_L V_{CC}^2 + f_O)$ where f_i = Input Frequency, f_O = Input Frequency, C_L = Output Load Capacitance, V_{CC} = Supply Voltage.
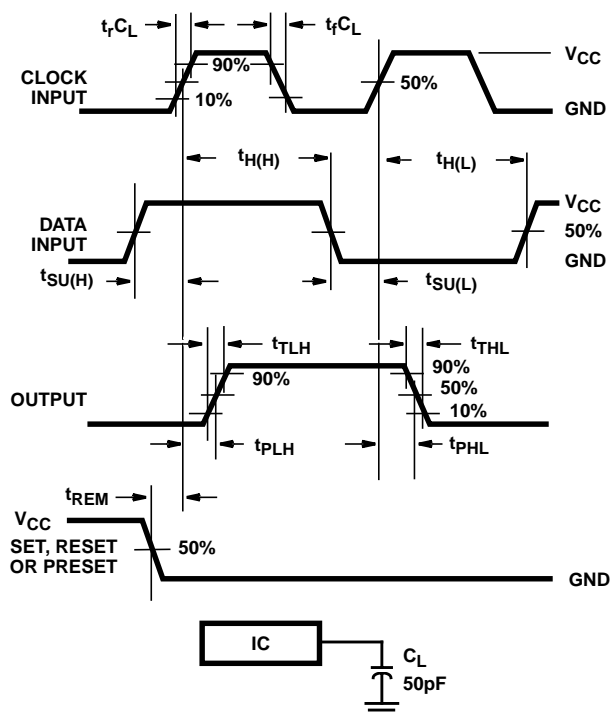
Test Circuits and Waveforms

FIGURE 1. HC SETUP TIMES, HOLD TIMES, REMOVAL TIME, AND PROPAGATION DELAY TIMES FOR EDGE TRIGGERED SEQUENTIAL LOGIC CIRCUITS
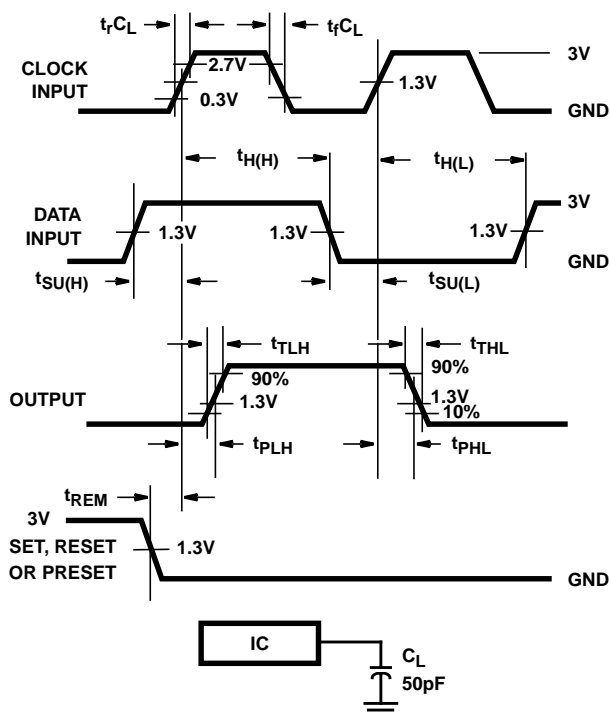

FIGURE 2. HCT SETUP TIMES, HOLD TIMES, REMOVAL TIME, AND PROPAGATION DELAY TIMES FOR EDGE TRIGGERED SEQUENTIAL LOGIC CIRCUITS

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.