


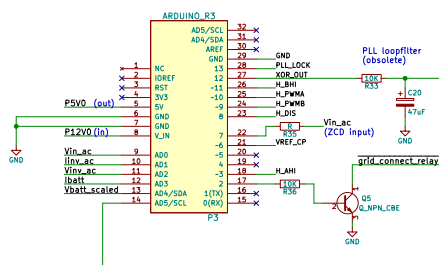






Transformer used with the development model: 240V / 19V - 200VA  
Transformer ratio and power rating may vary depending on the application.  
L1 used, is a power factor correction coil from ATX power supply.

WARNING: High voltages present !  
Use an isolation transformer !

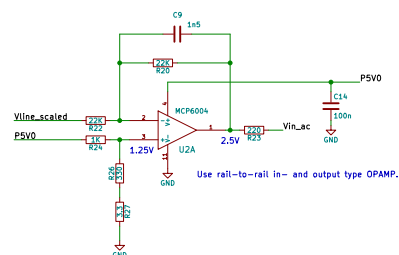

power decoupling caps  
for LEM transducers



NOTE: Circuit power supplies are not drawn.