


FA7155 Series Six-axis force sensor



Specifications	Technique			
Model	FA7155A	FA7155B	FA7155C	FA7155D
Fx (Cap N)	150	200	300	400
Fy (Cap N)	150	200	300	400
Fz (Cap N)	150	200	300	400
Mx (Cap Nm)	5.5	7.5	13	20
My (Cap Nm)	5.5	7.5	13	20
Mz (Cap Nm)	5.5	7.5	13	20
φ(mm)	75	75	75	75
H(mm)	31.5			
Weight(kg)	≤0.3			
Material	Aluminium Alloy			
Overload level(%FS)	300			
Resolution(%FS)	0.03			
Accuracy(%FS)	0.5			
Repeatability(%FS)	0.1			
Sampling frequency(Hz)	500~1000 (Customisable)			
Supply voltage(VDC)	12~48 (Customisable)			
Communication interface	RS485/CAN-FD/EtherCAT (Customisable)			

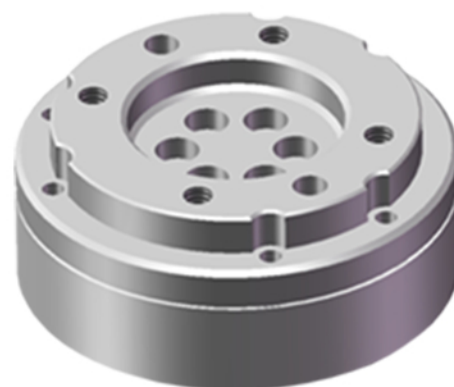

Product Advantages


- ▶ High Signal-to-Noise Ratio Acquisition System
- ▶ High-strength body, excellent durability
- ▶ Features a wide range of interfaces for broad applicability
- ▶ Wide measurement range, ultra-high strength



Fields of application


- ▶ Industrial robot assembly and polishing
- ▶ Structural Safety Monitoring
- ▶ Automotive Industry Testing

Product external dimensions

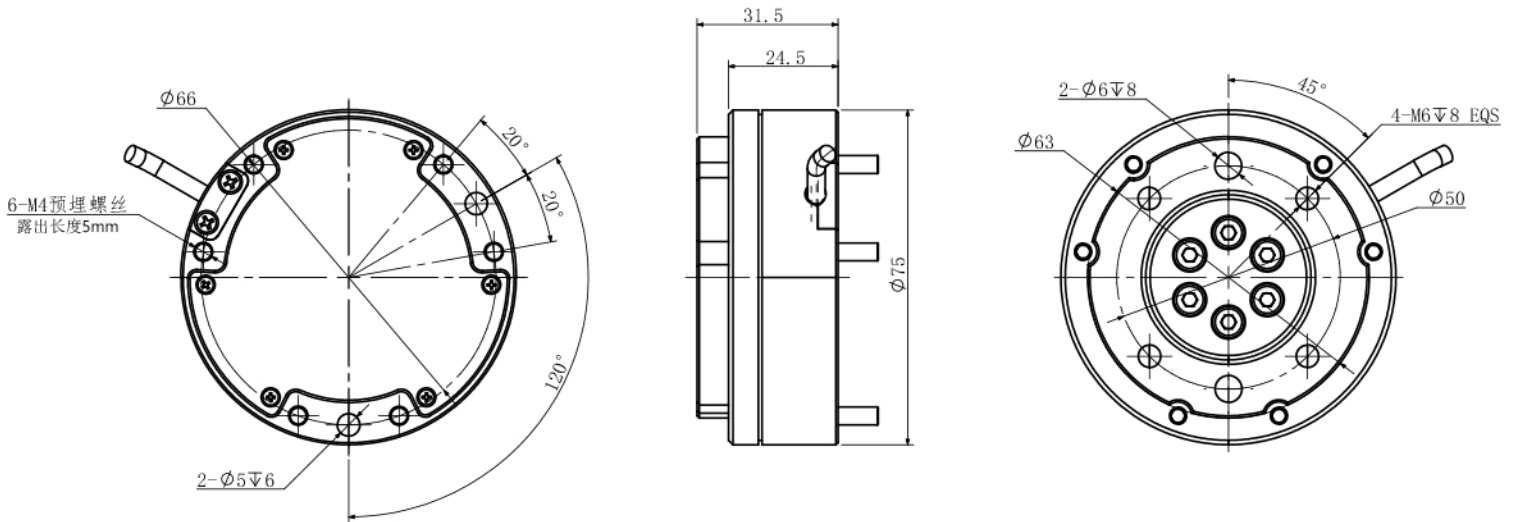


Product software

- Real-time transmission
- Precise centre of mass detection
- Data indicates

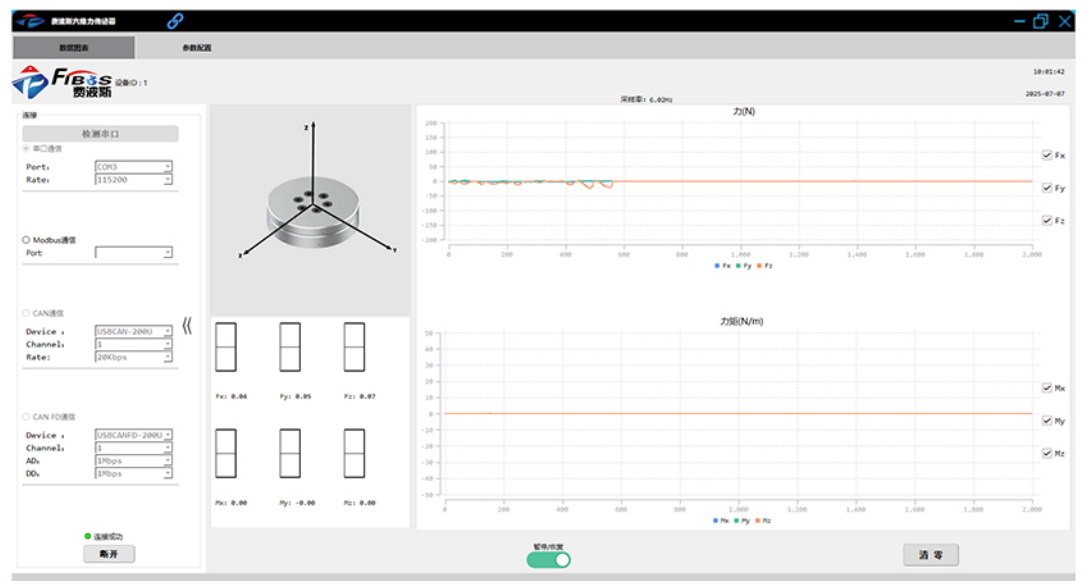



Product application

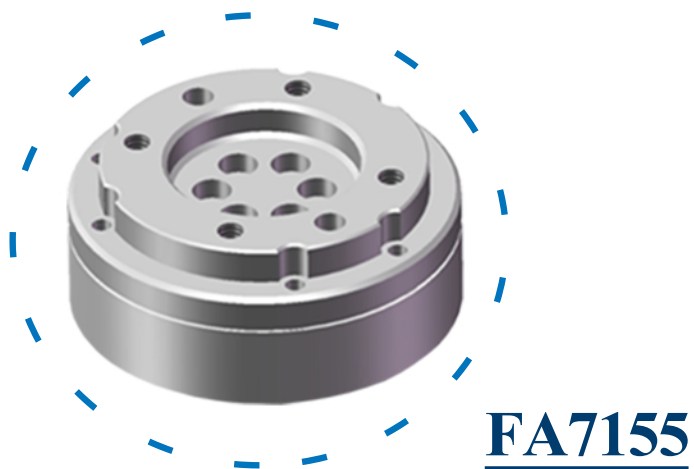

COLLABORATIVE ROBOT ARM



APPLICATION SCENARIOS

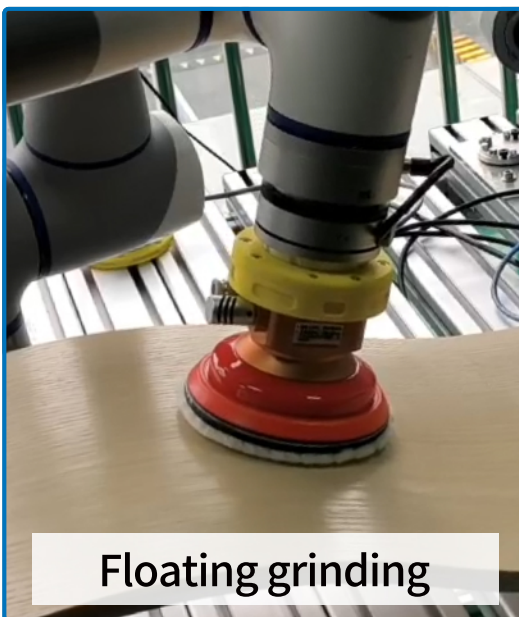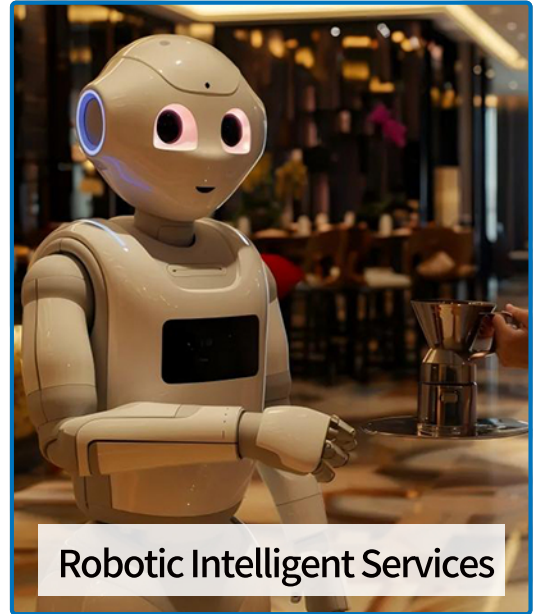

■ Six-axis force sensors are now widely employed in collaborative robotics, industrial automation, aerospace, and other intelligent industries.