# Q-Relay: QRNG → Teleportation → Distributed Deutsch–Jozsa

**Qiskit Fall Fest 2026 · DBATU, Lonere.** All three problem statements, built as one pipeline in which each stage depends on the previous one, with every result labelled by source: **SIM** (Aer simulator), **EMU** (Aer plus the noise model of a real IBM device snapshot, `FakeBrisbane`) or **HW** (real IBM hardware, with job ID).


Stack: Python 3.12.5, Qiskit 2.6.1, qiskit-aer 0.18.2, qiskit-ibm-runtime 0.51.0, NumPy 2.5.4, SciPy 1.18.1. Code: `qrelay/` (library), `notebooks/01–04` (executed), `tests/` (53 tests), `web/` + `server/` (interactive demo). Derivations: `docs/THEORY.md`.

> **Honesty notes.** (1) Aer's measurement outcomes come from a classical PRNG, so SIM "quantum" bits are pseudo-random. Only HW bits are physically random. (2) EMU results are never presented as hardware. (3) Passing statistical tests does not prove randomness. (4) A teleportation channel is certified quantum only when average fidelity exceeds the classical bound 2/3.

---

## 1. PS1: Quantum teleportation


**Approach.** Alice holds $|\psi\rangle = \cos\frac{\theta}{2}|0\rangle + e^{i\varphi}\sin\frac{\theta}{2}|1\rangle$ (q0) and half of a Bell pair (q1). Bob holds q2. The primary implementation is a **dynamic circuit**: mid-circuit Bell-basis measurement and classical feed-forward via `if_test` (X if $m_1$, then Z if $m_0$). A **deferred-measurement** variant (CX/CZ corrections) serves as the universal fallback. A third engine evolves the 3-qubit density matrix gate by gate and records every qubit's Bloch vector for the visualisation.

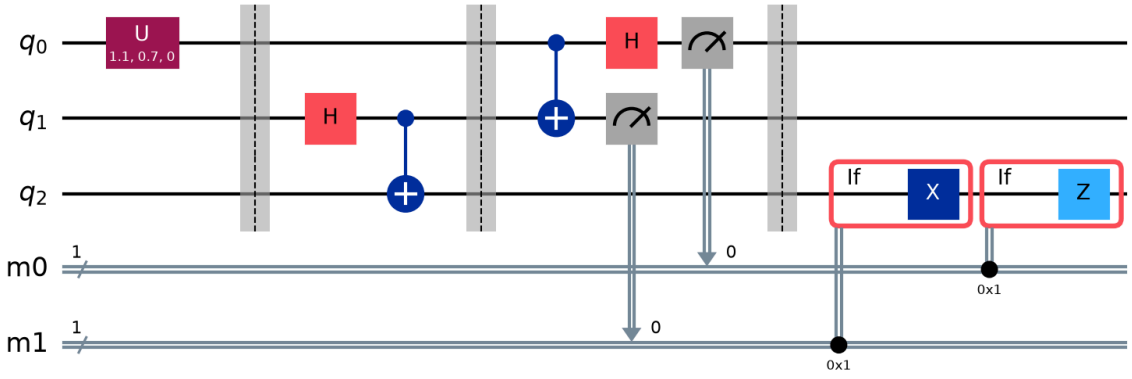



**Verification.** Four independent measures:

| check | result [SIM] |
|---|---|
| Exact $F = \langle\psi\|\rho_B\|\psi\rangle$ in **each** of the 4 branches (Aer conditional density matrices) | 1.000000000 in every branch, for 50 random states, both variants |
| 6 cardinal states, Pauli transfer matrix | $R = I$ (to 1e-9), $F_{pro} = 1$ |
| Tomography (Z/X/Y bases, our implementation), 200 Haar states from the QRNG pool, 1024 shots/basis | $\bar{F} = 0.9916 \pm 0.0050$ (finite-shot spread) |
| Exact average over the same 200 states | mean $1.0000000000$, min $0.9999999999999994$ |


The step engine shows the physics: after the Bell CX both q1 and q2 have $|\vec{r}| = 0$ (maximally mixed halves). After Alice's measurement q0 collapses to a pole (**no-cloning**: moved, not copied). Bob's arrow snaps onto $|\psi\rangle$ only after the corrections.

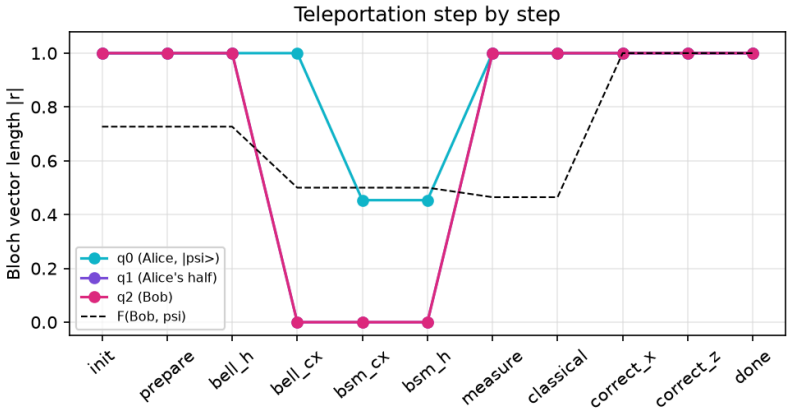


**Noise analysis.** Noise is inserted as explicit error channels after every gate (`qrelay.noise.noisify`, recursing into the `if_else` blocks). Average fidelity is computed exactly from the PTM via $F_{avg} = (2F_{pro} + 1)/3$.

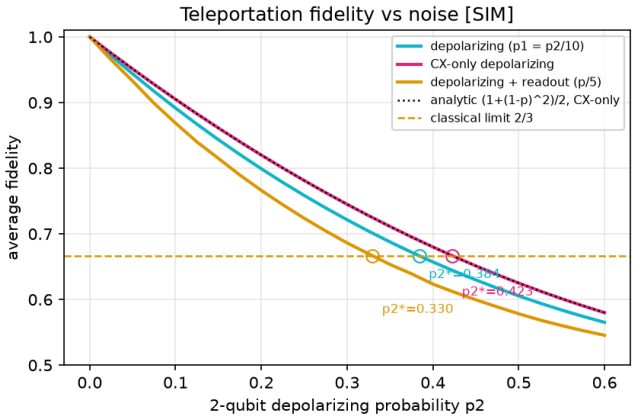


- With CX-only depolarizing noise, simulation and our closed form $F = (1 + (1-p)^2)/2$ (THEORY §1.3) agree to $10^{-6}$. The **quantum-advantage threshold** is $p_2^* = 1 - 1/\sqrt{3} = 0.4226$.
- Adding 1-qubit noise ($p_1 = p_2/10$) lowers it to $p_2^* = 0.384$. Adding readout error ($p/5$) lowers it to $0.330$. Readout matters because it corrupts **Alice's feed-forward bits**.
- Thermal relaxation (gate times 50/300 ns): $F_{avg} = 0.997$ at $T_1 = T_2 = 200\,\mu s$, $0.945$ at $10\,\mu s$, and it crosses 2/3 near $1\,\mu s$.
- **Readout mitigation** (confusion-matrix inversion) on the noisy model ($p_1$=$0.01$, $p_2$=$0.1$, readout $0.02$): cardinal-state tomography $0.853 \to 0.868$. Mitigation cannot fix flipped feed-forward bits. For $|+\rangle$ with readout flip $p$ the mitigated ceiling is exactly $1 - p$ (measured $0.924$ at $p = 0.08$).

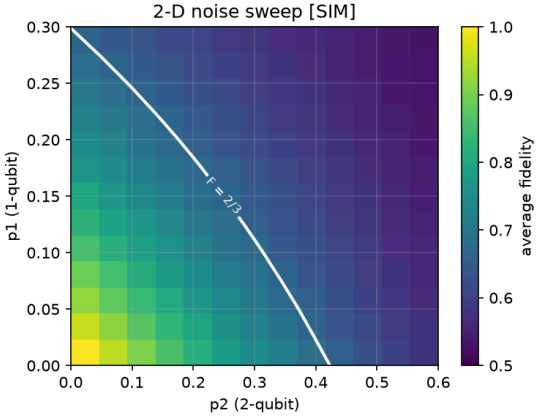


**Device results [EMU, fake_brisbane, 4096 shots, cardinal-state tomography].** $F_{avg} = 0.965$ (deferred) and $0.962$ (dynamic), with per-state $0.951$–$0.977$, all far above 2/3. The PTM is close to diagonal (0.93/0.91/0.93): mostly depolarizing-type error. *Hardware results, if run, appear in `data/hardware/hw_batch_*.json` and on the Hardware page with their IBM job ID.*


## 2. PS2: Quantum random number generator

**Approach.** $H$ then measure, on 16 parallel qubits per shot (a 1-qubit textbook circuit and an $m$-qubit version). **1,000,000 bits** generated on the simulator in about 2 s, and 163,840 bits from the emulated device batch. Little-endian ordering is handled explicitly (`qrng.memory_to_bits`).

**Statistics.** 10 NIST SP 800-22-style tests implemented from the specification ($\alpha = 0.01$), plus Shannon and min-entropy:

| generator (1M bits) | passed | min-entropy / byte | notes |
|---|---|---|---|
| QRNG [SIM] | **10/10** | 7.807 | lowest p = 0.015 (runs) |
| PCG64 | 10/10 | 7.828 | |
| Mersenne Twister | 10/10 | 7.828 | |
| **RANDU** (low byte) | **4/10** | 5.999 | fails longest-run, serial, ApEn, DFT, autocorrelation, byte $\chi^2$ with p < 1e-4 |
| QRNG [EMU] (163,840 bits) | 10/10 | 7.489 | smaller sample, so lower plug-in min-entropy |

RANDU is the control that proves the suite discriminates. Its **bit fingerprint** shows stripes where the others look like noise:

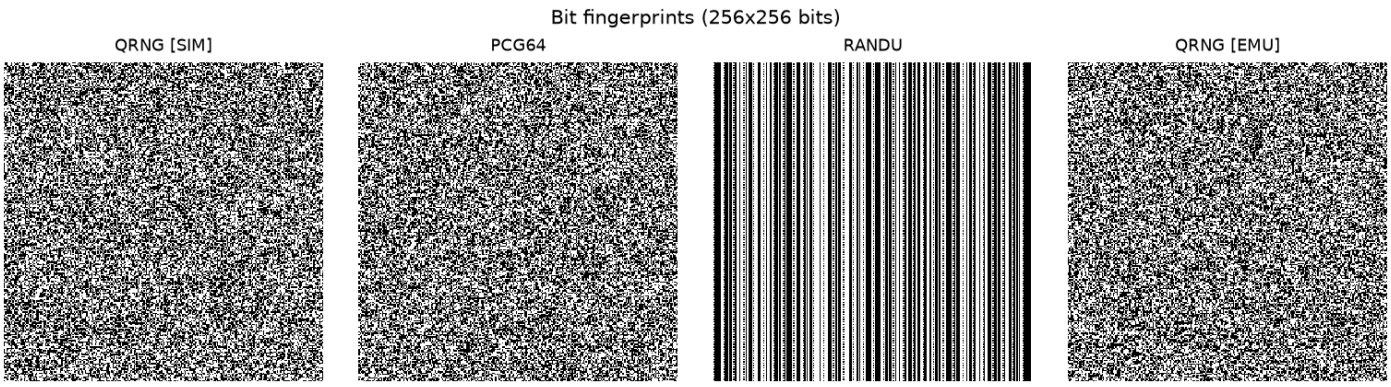


**Interpretation.** The quantum and classical generators are statistically indistinguishable by these tests, which is expected, because the tests cannot detect *where* randomness comes from. The value of a QRNG is the physical unpredictability of **hardware** bits, which no test can certify. The simulator's bits are, honestly, PRNG output.

**Bias mitigation** on a physically motivated biased source (asymmetric readout $P(0|1) = 0.2$, so $P(1) = 0.399$, $H_\infty = 0.735$/bit), 400k bits:


| method | P(1) out | yield | tests |
|---|---|---|---|
| raw | 0.3993 | 100% | 0/10 |
| Von Neumann | 0.5011 | 23.9% | 10/10 |
| XOR pairs | 0.4789 | 50% | 2/10 (bias $0.1 \to 0.02 = 2\varepsilon^2$, as predicted) |
| Toeplitz hashing ($n = 1024$, $\varepsilon = 2^{-32}$) | 0.4989 | 67.2% | 10/10 |

Toeplitz recovers nearly the source's min-entropy, about 3× Von Neumann's yield, at the cost of an independent seed. On EMU bits ($P(1) = 0.4999$) all methods pass, and Toeplitz keeps 94%.

## 3. PS3: Deutsch–Jozsa


**Approach.** General $n$ (tested 1–8). Oracles: 2 constant (identity, X), and balanced $x_0$, parity, inner product $a \cdot x$ and **random balanced** (a random half of the inputs, via MCX), plus an equivalent `Diagonal` phase oracle that tests show

matches the bit oracle on every input. Random oracles draw from the QRNG pool.

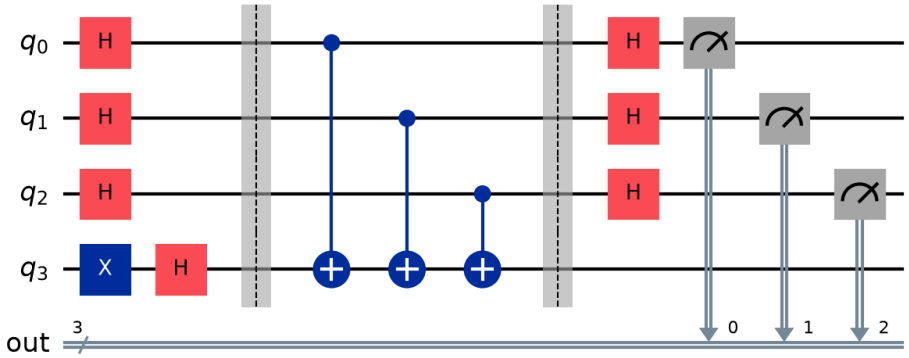



**Correctness.** We enumerate **every** function for $n = 1, 2, 3$ (2 constant and 2, 6, 70 balanced) and confirm $P(0^n) = 1$ or $0$ exactly. We also test 300 random balanced oracles each for $n = 4, 5, 6$ and 40 each for $n = 7, 8$. Measured runs give all-zeros for constant and non-zero for balanced in every case.


**Superposition, phase kickback, interference.** The step view shows uniform amplitudes $1/\sqrt{2^n}$, then signs $(-1)^{f(x)}$ appearing after the single query while the ancilla stays $|-\rangle$, then the $|0^n\rangle$ amplitude reaching $\pm 1$ (constant) or cancelling to exactly 0 (balanced).

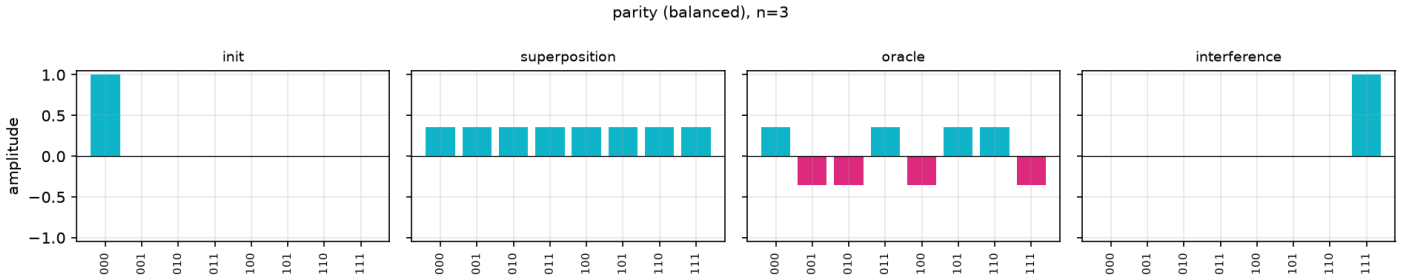


**Query complexity.** Quantum 1 versus classical deterministic $2^{n-1} + 1$. An **adversary simulation** (answer 0 for as long as possible) measures exactly $2^{n-1} + 1$ for $n = 1..14$.

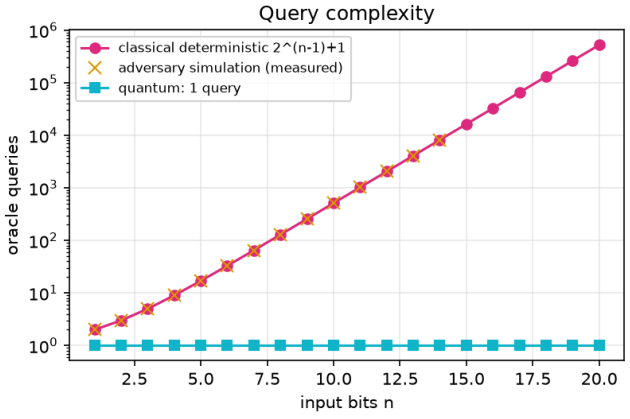



**Noise.** Success degrades with the oracle's entangling-gate count. At $p_2 = 0.15$, $n = 2$: parity (2 CX) scores 0.962 and random balanced (12 CX) scores 0.794. **Pitfall we flag:** at large $n$ the random-balanced oracles (288–3904 CX) *appear* to succeed 94–98% under noise, but only because the output is nearly uniform and $P(\text{non-zero}) \to 1 - 2^{-n}$ by chance. The discrimination $P_0(\text{const}) - P_0(\text{bal})$ removes this artefact and decays monotonically.

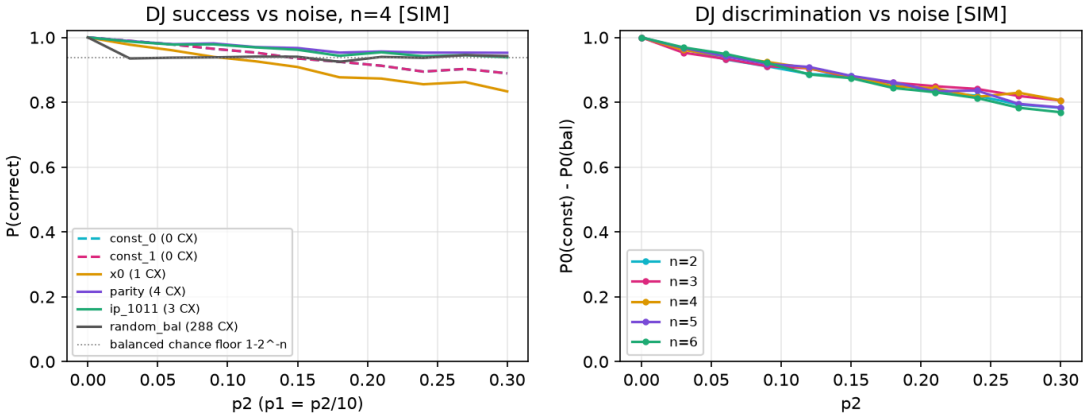



**Device [EMU].** All 10 circuits are classified correctly. Success is 0.98–1.00 for shallow oracles, 0.948 (n=2) and 0.890 (n=3, 109 two-qubit gates after transpilation) for random balanced.

## 4. The integrated mission: teleported-ancilla Deutsch–Jozsa


The QRNG pool seeds a Haar-random state, the DJ size $n$ and a hidden oracle. Alice teleports the state (Stage 2). Then she teleports $|-\rangle$, which **Bob uses as the DJ ancilla** (Stage 3, one dynamic circuit). One noise knob drives all stages.

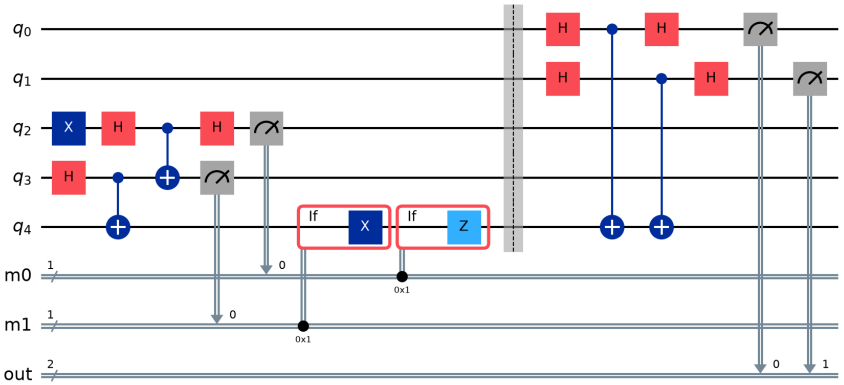


**Result (proved in THEORY §4, verified numerically).** With a noiseless oracle, constant oracles are always correct, and $P(\text{correct} \mid \text{balanced}) = \langle - | \rho_{anc} | - \rangle$, **the teleportation fidelity of the ancilla**. A $|+\rangle$ admixture gives no kickback, so teleportation noise makes Bob over-report "constant". Across $p_2 \in [0, 0.6]$ the agreement is within 0.009 (shot noise).

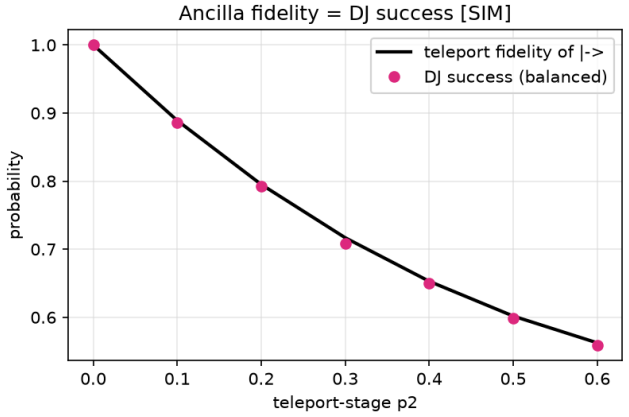


**Which stage hurts more?** For a shallow oracle (parity, n=3) teleport-stage noise dominates: $p_2 = 0.4$ gives 0.636 when confined to teleportation versus 0.933 when confined to the oracle. In the ideal case, the teleported ancilla is identical to a local one for every library oracle ($n \leq 4$, both variants).

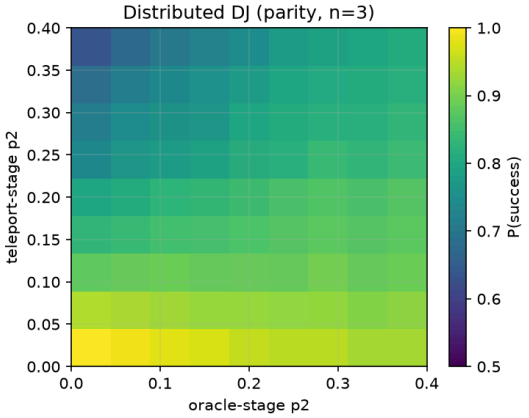


## 5. Testing, limitations, future work

**Tests (53, all passing).** Exact teleport fidelity (all branches, 50 random states, both variants), PTM = I, analytic noise formula, exhaustive DJ $n \leq 3$, bit/phase oracle equivalence, the adversary count, extractor improvement, monotone fidelity and the 2/3 crossing, the mitigation ceiling, the ancilla-fidelity theorem, mission event order, and every API endpoint plus the WebSocket. The UI is smoke-tested headlessly with zero console errors.

**Limitations.** SIM randomness is pseudo-random. EMU uses a calibration snapshot, not today's device. The Toeplitz extractor's guarantee assumes the per-bit min-entropy estimate holds, which is plug-in and i.i.d. assumed. The tomography projection onto the Bloch ball is a simple constrained estimate, not full maximum likelihood.

**Future work.** Run the full batch on IBM hardware (script ready: `scripts/run_hardware.py --submit`). Add Pauli twirling and dynamical decoupling to the teleportation circuit. Use entanglement-swapping relays (multi-hop Q-Relay). Add device-independent randomness certification via a CHSH test.

*References: see `docs/REFERENCES.md`.*