

# GSXEVKMIMXRT595

## Getting Started with Xplorer for EVK-MIMXRT595

Rev. 5 — 10 January 2024

User guide

### Document information

Information	Content
Keywords	GSXEVKMIMXRT595, EVK-MIMXRT595
Abstract	This document describes the steps to get started with MCUXpresso SDK for EVK-MIMXRT595.



## 1 Overview

Cadence Tensilica Xplorer is a complete development environment that helps users create application code for high-performance Tensilica processors. Xplorer is the interface to powerful software development tools such as the XCC compiler, assembler, linker, debugger, code profiler, and full set of GUI tools.

Xplorer (including both GUI and command-line environment) is the only available development IDE for the DSP core of MIMXRT595.

## 2 Install Xplorer Toolchains

In this chapter:

- [Section 2.1 "Xtensa Software Tools Platform Support"](#)
- [Section 2.2 "Install the Xtensa Xplorer IDE and Tools"](#)
- [Section 2.3 "Install License Key"](#)
- [Section 2.3.1 "Identify PC MAC Address"](#)
- [Section 2.3.2 "Download License Key"](#)
- [Section 2.4 "Install RT500 DSP Build Configuration"](#)
- [Section 2.5 "Install Xtensa On Chip Debugger Daemon"](#)
- [Section 2.6 "Install Xtensa Software Tools without IDE"](#)

### 2.1 Xtensa Software Tools Platform Support

The Xtensa Software Tools are officially supported on the following platforms:

- **Windows:** Win 10 64-bit, Win 8 64-bit, Win 7 64-bit
- **Linux:** RHEL 6 64-bit (with 'Desktop' package installed)

There may be compatibility issues with other versions of Linux or Windows, especially when using the IDE. Also note that security-enhanced Linux (SELinux) is not a supported platform because the OS can prevent different shared libraries (including Xtensa Tools) from loading.

For details on platform support and installation guidelines, see the Xtensa Development Tools Installation Guide.

### 2.2 Install the Xtensa Xplorer IDE and Tools

To install the Xtensa Xplorer IDE and tools:

1. Go to the URL <https://tensilicatools.com/download/fusion-f1-dsp-sdk-for-rt500/> and log in.  
**Note:** Ensure to register, if you are accessing the page for the first time. You must use your corporate email address to register.



Figure 1. Register to access

2. You receive an email confirmation with an activation link from 'Tensilica Tools' [no-reply@tensilicatools.com](mailto:reply@tensilicatools.com).

**Note:** Ensure to check the spam folder if this email is not in your inbox. Click the activation link to complete the registration.

3. Login with your credentials to see the available materials for download.

- Download and install the **XTENSA Xplorer IDE V10.1.11** for your operating system (Windows or Linux).
- Download the **DSP Configuration V10.1.11** for your operating system. This is installed later through the IDE. For details, see [Section 2.4](#).

**Note:** NXP recommends version **10.1.11** of the Xtensa Xplorer IDE and tools for use with the RT500 DSP.

## 2.3 Install License Key

Xtensa development tools use FLEXlm for license management. FLEXlm licensing is required for tools such as the Xtensa Xplorer IDE, Xtensa C and C++ compiler, and Instruction Set Simulator (ISS).

Currently RT500 supports node-locked license for Xtensa tools. A node-locked license permits tools to run on a specific computer, tied to the MAC address of the primary network interface that is permanently attached to the machine.

### 2.3.1 Identify PC MAC Address

To generate the correct license file, identify the appropriate MAC for the computer you plan to run Xtensa tools on. Remove '-' or ':' symbols in the MAC address.

```
C:\Users>ipconfig /all

Wireless LAN adapter Wireless Network Connection:

    Connection-specific DNS Suffix  . : us-sjo01.nxp.com
    Description . . . . . : Intel(R) Dual Band Wireless-AC 8265
    Physical Address. . . . . : 14-4F-8A-63-8C-33
    DHCP Enabled. . . . . : Yes
```

Figure 2. Windows

```
[user@rhel ~]$ ifconfig
eth0      Link encap:Ethernet  HWaddr 12:34:56:78:90:AB
```

Figure 3. Linux

**Note:** Linux NOTE MAC address MUST be associated with eth0 interface. If not, FLEXlm cannot perform the license checkout and you will not be able to compile or simulate your code. If your host has the MAC address associated with another interface. For example: em1, you may use the following approach, or another approach recommended by your IT team to rename the interface to eth0.

```
# Add udev rule for naming interface
$ sudo vim /etc/udev/rules.d/70-persistent-net.rules
# udev rule (replace 'XX' with the MAC address of your PC):
SUBSYSTEM=="net", ACTION=="add", ATTR{address}=="XX:XX:XX:XX:XX:XX", NAME="eth0"
# Change "em1" to "eth0" in your interfaces file.
$ sudo vim /etc/network/interfaces
# Restart udev or reboot machine
$ sudo reboot
```

2.3.2 Download License Key

To download the license key:

- 1. Click the **CLICK TO GET A LICESNE KEY FOR RT500 SDK** button.



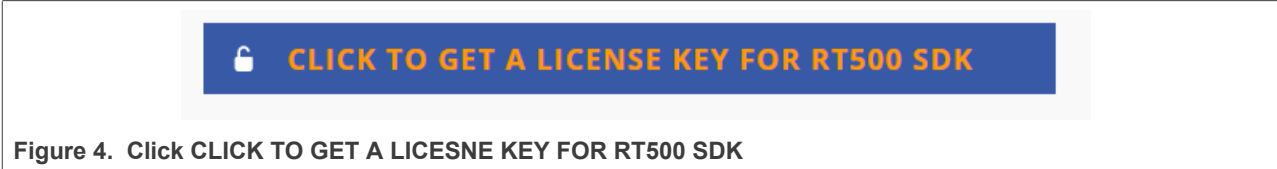


Figure 4. Click CLICK TO GET A LICESNE KEY FOR RT500 SDK


- 2. Click the **Accept** button.

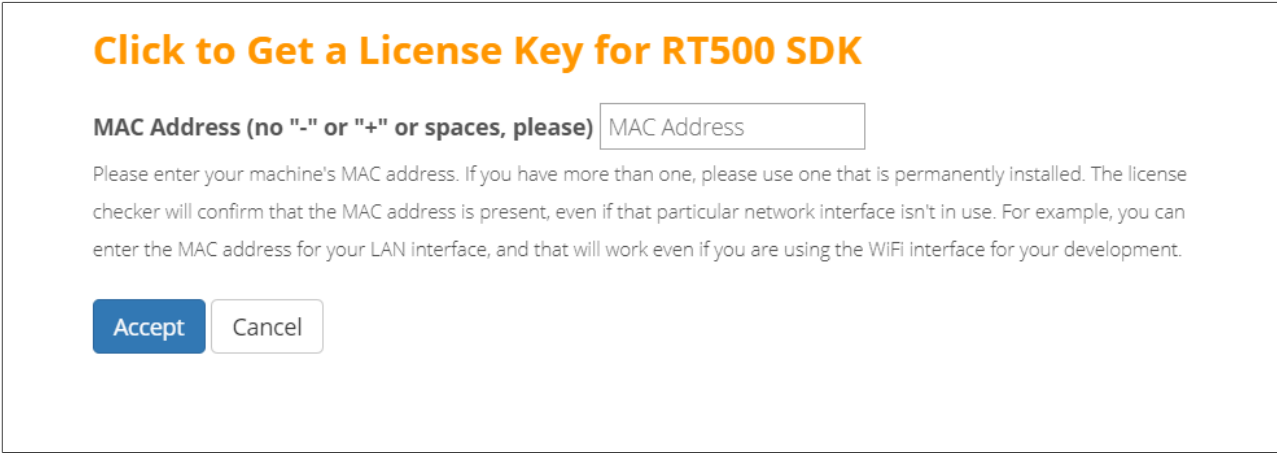

The following message appears.

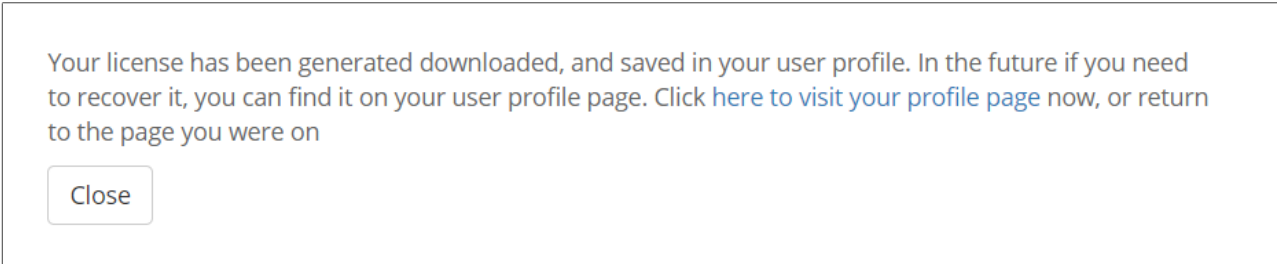

- 3. Check the license in the user-profile or the email.

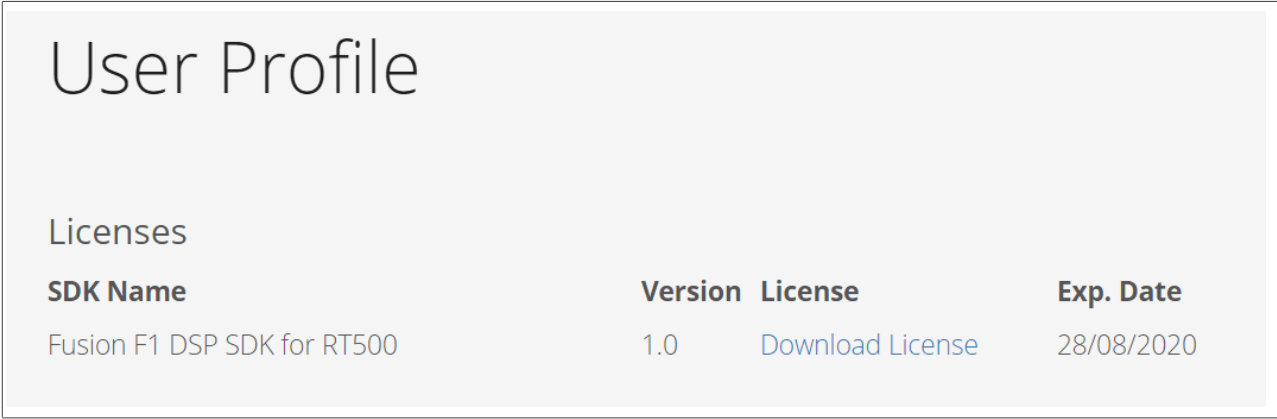

The license file gets generated.

4. Download the license file.
5. Open the recently installed Xplorer V10.1.11, select menu **Help - Xplorer License Keys > Install Software Keys**.
6. Select the license key file.
7. Click the **Finish** button.

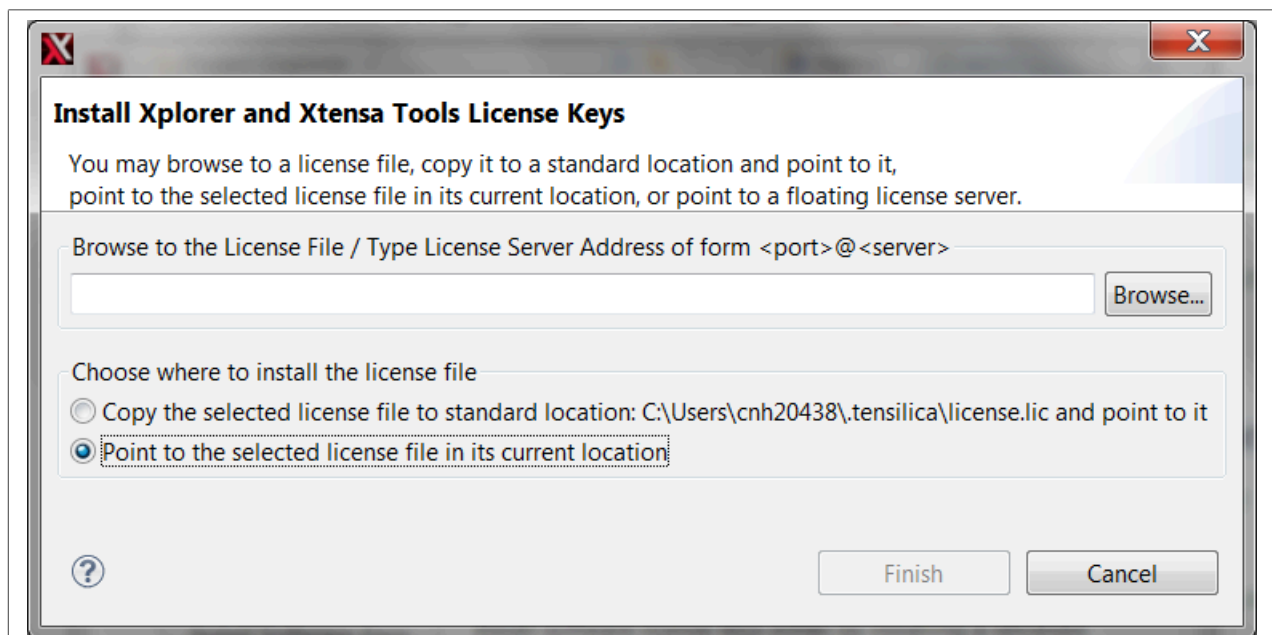


Figure 5. Install Xplorer and Xtensa tools license keys

**Note:** The generated license file only supports debug/run on the RT500 device target. It does not support software simulation/Xplorer ISS. Contact Cadence directly if you have special must run software simulations.

## 2.4 Install RT500 DSP Build Configuration

'Build Configuration' is a term that describes all parameters and necessary build includes for the Tensilica processor implementation you are developing with. It is mandatory to install a specific build configuration before starting development on RT500.

The build configuration is provided by NXP as a binary file that can be imported into the Xplorer IDE. This file can be downloaded for your OS from the Tensilica URL.

The build configuration can be installed into the IDE using the 'System Overview' panel which is in the lower left corner by default. If this panel is not visible, it can be toggled using menu item **Window > Show View - System Overview**.

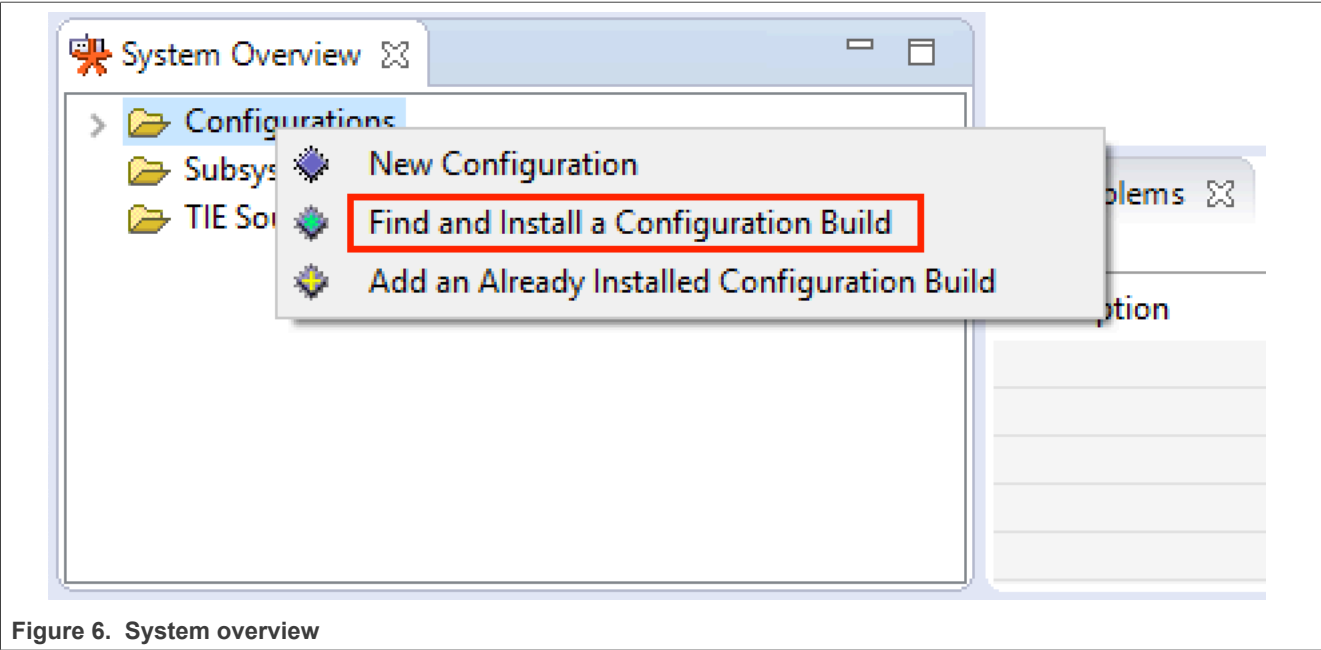


Figure 6. System overview

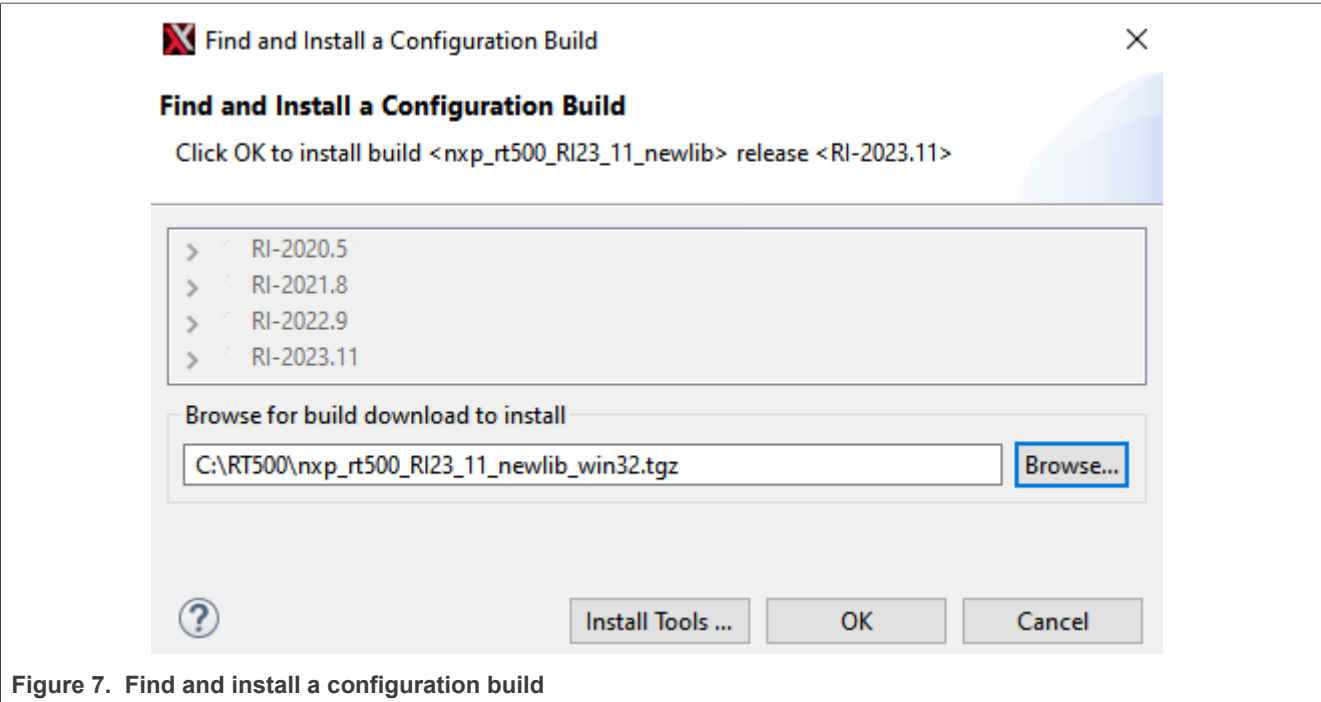


Figure 7. Find and install a configuration build

Select the directory and click **OK**.

2.5 Install Xtensa On Chip Debugger Daemon

The Xtensa On Chip Debugger Daemon (xt-ocd), is a powerful gdb-based debugging tool. It is not installed by default with the Xplorer IDE. A self-extracting executable installer is included with the IDE, which can be found at the following location:

## Windows

```
C:\usr\xt-ocd-14.11-windows64-installer.exe
```

## Linux

```
~/xtensa/XtDevTools/downloads/RI-2023.11/tools/xt-ocd-14.11-linux64-installer
```

At this moment xt-ocd supports J-Link and ARM RVI/DSTREAM probes over Serial Wire Debug (SWD) for RT500. xt-ocd installs support for J-Link probes but does not install the required J-Link drivers which must be installed separately. The RT500 requires J-Link software version 6.46 or newer.

**Note:** When installing xt-ocd on Linux, you must manually add a symlink to the installed J-Link driver:

```
ln -s <jlink-install-dir>libjlinkarm.so.6 <xocd-install-dir>/modules/libjlinkarm.so.6
```

xt-ocd is configured with an XML input file 'topology.xml' that you will need to modify to fit your debugger hardware. Using J-link as example, use below content to replace the original template.

**Note:** You must replace 'usbser' section to your own JINK serial number (9 digits number on the back of the J-Link hardware).

```
<configuration>
<controller id='Controller0' module='jlink' usbser='600100000' type='swd' speed='1000000'
locking='1' />
<driver id='XtensaDriver0' dap='1' xdm-id='12' module='xtensa' step-intr='mask,stepover,setps' />
<chain controller='Controller0'>
<tap id='TAP0' irwidth='4' />
</chain>
<system module='jtag'>
<component id='Component0' tap='TAP0' config='trax' />
</system>
<device id='Xtensa0' component='Component0' driver='XtensaDriver0' ap-sel='3' />
<application id='GDBStub' module='gdbstub' port='20000' sys-reset='0'>
<target device='Xtensa0' />
</application>
</configuration>
```

Below showing another topology.xml example for ARM RealView ICE (RVI) and DSTREAM debug probes.

```
<configuration>
<controller id='Controller0' module='rvi' />
<driver id='XtensaDriver0' debug='' inst-verify='mem' module='xtensa' step-
intr='mask,stepover,setps' />
<driver id='TraxDriver0' module='trax' />
<chain controller='Controller0'>
<tap id='TAP0' irwidth='4' />
</chain>
<system module='jtag'>
<component id='Component0' tap='TAP0' config='trax' />
</system>
<device id='Xtensa0' component='Component0' driver='XtensaDriver0' xdm-id='12' />
<device id='Trax0' component='Component0' driver='TraxDriver0' xdm-id='12' />
<application id='GDBStub' module='gdbstub' port='20000' >
<target device='Xtensa0' />
</application>
<application id='TraxApp' module='traxapp' port='11444'>
<target device='Trax0' />
</application>
</configuration>
```

Congratulations! Now you have all Xplorer toolchains installed.

For more details, about Xtensa software tools, build configurations, or xt-ocd daemon, see the full set of documents in Xplorer menu **Help > PDF Documentation**.

## 2.6 Install Xtensa Software Tools without IDE

The Xtensa Software Tools optionally be installed without the use of the IDE, which may be desired for use in a command-line only Linux environment, or for better compatibility with an unsupported Linux environment.

The command-line tools package is available as a redistributable zip file that is extracted with an Xplorer IDE install. The IDE must be installed one time in your organization to gain access to the tools package, which is then available at:

```
~/xtensa/XtDevTools/downloads/RI-2023.11/tools/ XtensaTools_RI_2023_11_linux.tgz
```

With the tools package and the DSP Build Configuration package available from, the Tensilica Tools download site (see [Section 2.1](#), the toolchain can be set up as follows.

```
# Create Xtensa install root
mkdir -p ~/xtensa/tools
mkdir -p ~/xtensa/builds
# Set up the configuration-independent Xtensa Tool:
tar zxvf XtensaTools_RI_2023_11_linux.tgz -C ~/xtensa/tools
# Set up the configuration-specific core files:
tar zxvf nxp_RT500_RI23_11_newlib_linux_redist.tgz -C ~/xtensa/builds
# Install the Xtensa development toolchain:
cd ~/xtensa./builds/RI-2023.11-linux/nxp_RT500_RI23_11_newlib/install
\--xtensa-tools./tools/RI-2023.11-linux/XtensaTools\
--registry ./tools/RI-2023.11-linux/XtensaTools/config
```

## 3 Install MCUXpresso SDK

In this section:

- [Section 3.1](#)
- [Section 3.2](#)
- [Section 3.3](#)

### 3.1 Download MCUXpresso SDK for RT500

DSP enablement for RT500, including drivers, middleware libraries, and demo applications are included with the latest RT500 SDK available for download at <https://mcuxpresso.nxp.com>.

**Note:** Ensure to register, if you are accessing the page for the first time.

Log in to use the SDK builder. The steps are:

1. Click **Select Board**.
2. Search by name for board: **RT595**.
3. Select **EVK-MIMXRT595**.
4. Click **Build MCUXpresso SDK**.



### Select Development Board

Search for your board or kit to get started.


**Search by Name**

**Select a Board, Kit, or Processor**

EVK-MIMXRT1050 (MIMXRT1052xxxx)	Deprecated
EVK-MIMXRT1060 (MIMXRT1062xxxxA)	
EVK-MIMXRT1064 (MIMXRT1064xxxxA)	
<b>EVK-MIMXRT595 (MIMXRT595S)</b>	<b>Controlled access</b>
EVK-MIMXRT685 (MIMXRT685S)	
EVKB-IMXRT1050 (MIMXRT1052xxxxB)	
MEK-MIMX8QM (MIMX8QM6xxxFF)	
MEK-MIMX8QX (MIMX8QX6xxxFZ)	
MIMXRT1170-EVK (MIMXRT1176xxxx)	Controlled access
SLN-ALEXA-IOT (MIMXRT106AxxxxA)	

**Name your SDK**

Don't use: in the name of your SDK



IMXRT595-EVKB: EVK Development Platform for LMX MIMXRT595S MCUs

**Hardware Details**

Board	EVK-MIMXRT595
Device	MIMXRT595S
Core Type / Max Freq	Cadence-FusionF1 / 200MHz
	Cortex-M33 / 200MHz
Device Memory Size	0 KB Flash 5120 KB RAM

**Actions**

[Build MCUXpresso SDK](#)

Explore selection with Pins tool

Explore selection with Clocks tool

Figure 8. Select the development board

## 3.2 MCUXpresso SDK DSP Enablement

The DSP-specific enablement is available inside the MCUXpresso SDK release package for RT500. The path is: `<SDK_ROOT>/devices/MIMXRT595S/`

Unified device and peripheral driver source code that compiled for both ARM and DSP cores.

**Note:** Only a limited subset of peripheral drivers and components are supported on the DSP.

`<SDK_ROOT>/boards/evkmimxrt595/dsp_examples/`

DSP example applications are available at: `<SDK_ROOT>/middleware/multicore/rpmsg_lite/`

Unified RPMsg-Lite multicore communication library, with porting layers for ARM and DSP cores. `<SDK_ROOT>/middleware/dsp/audio_framework/`

Xtensa Audio Framework (XAF) for DSP core

## 3.3 DSP Core Initialization

In order to minimize power consumption, the DSP core is NOT powered when RT500 boots up.

To run or debug DSP applications: you will first need to execute some code on the ARM core to initialize the DSP.

A DSP management interface library is provided in the SDK, at `<SDK_ROOT>/devices/MIMXRT595S/drivers/fsl_dsp.c:`

```
/* Initialize DSP core. */
void DSP_Init(void);
/* Deinit DSP core. */
void DSP_Deinit(void);
/* Copy DSP image to destination address. */
void DSP_CopyImage(dsp_copy_image_t *dspCopyImage);
<SDK_ROOT>/devices/MIMXRT595S/drivers/fsl_dsp.h:
/* Start DSP core. */
```

```
void DSP_Start(void);  
/* Stop DSP core. */  
void DSP_Stop(void);
```

The SDK includes a helper function used by the DSP example applications at <SDK\_ROOT>/boards/evkmimxrt595/dsp\_examples/hello\_world\_usart /cm33/.

```
/* Prepare DSP core for code execution:  
- Setup PMIC for DSP  
- Initialize DSP clock and core  
- (Optional) Copy DSP binary image into RAM  
- Start DSP core  
*/  
void BOARD_DSP_Init(void);
```

After executing this function during your ARM application startup, the DSP is initialized and ready to run. The code is loaded and debugged on the DSP with Xplorer IDE and tools.

## 4 Run and Debug DSP Demo using Xplorer IDE

- [Section 4.1](#)
- [Section 4.2](#)
- [Section 4.3](#)
- [Section 4.4](#)
- [Section 4.5](#)
- [Section 4.6](#)
- [Section 4.6.1](#)
- [Section 4.6.2](#)
- [Section 4.7](#)

### 4.1 Prepare Arm Core for ‘Hello World’

The DSP demos contained in the MCUXpresso SDK each consist of two separate applications that run on the Arm core and DSP core. The Arm core application initializes the DSP core in the manner described in section 2.3 and executes other application-specific functionality.

In order to debug the ‘Hello World’ DSP application, first set up and execute the Arm application using an environment of your choosing:

- Build and execute the ‘Hello World’ Arm demo at:

```
<SDK_ROOT>/boards/evkmimxrt595/dsp_examples/hello_world_usart/cm33/
```

Preparing an Arm core development environment is outside the scope of this document. For information on using the SDK for Arm core development, refer to the document ‘Getting Started with MCUXpresso SDK for MIMXRT500.pdf’ located under <SDK\_ROOT>/docs/.

**Note:** SEGGER J-Link software version >= 6.46 is required for compatibility with RT500. MCUXpresso IDE may ship with an older version, which is customized as in [Figure 9](#).

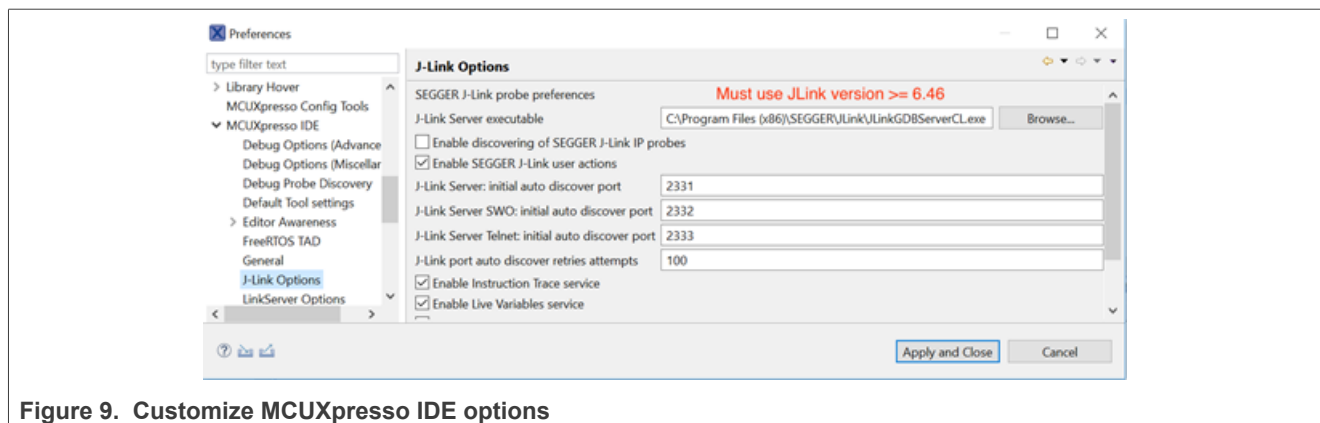


Figure 9. Customize MCUXpresso IDE options

## 4.2 Prepare DSP Core for 'Hello World'

The RT500 SDK provides a collection of DSP example applications located under `boards/evkmimxrt595/dsp_examples/`. Each DSP example has two source directories, one for the Arm Cortex-M33 core ('cm33') and one for the DSP fusion f1 core ('fusionf1'):

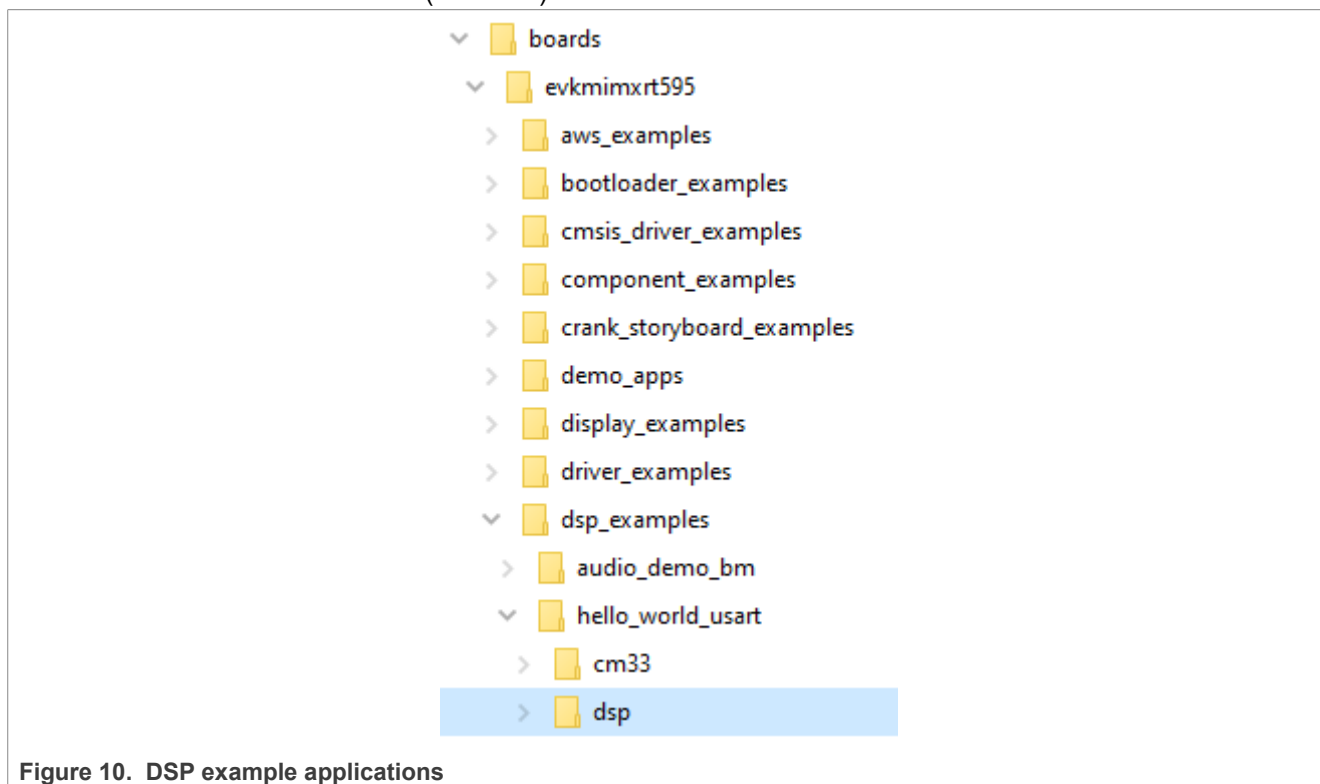


Figure 10. DSP example applications

Under these directories are build projects for different supported toolchains. For the DSP example above, the 'xcc' project allows to build on the command line and the 'xtensa' directory is an Xplorer IDE project.

To run the 'Hello World' demo, first you must import SDK sources into Xplorer IDE.

1. Use menu item **File > Import > Existing Projects into Workspace**.

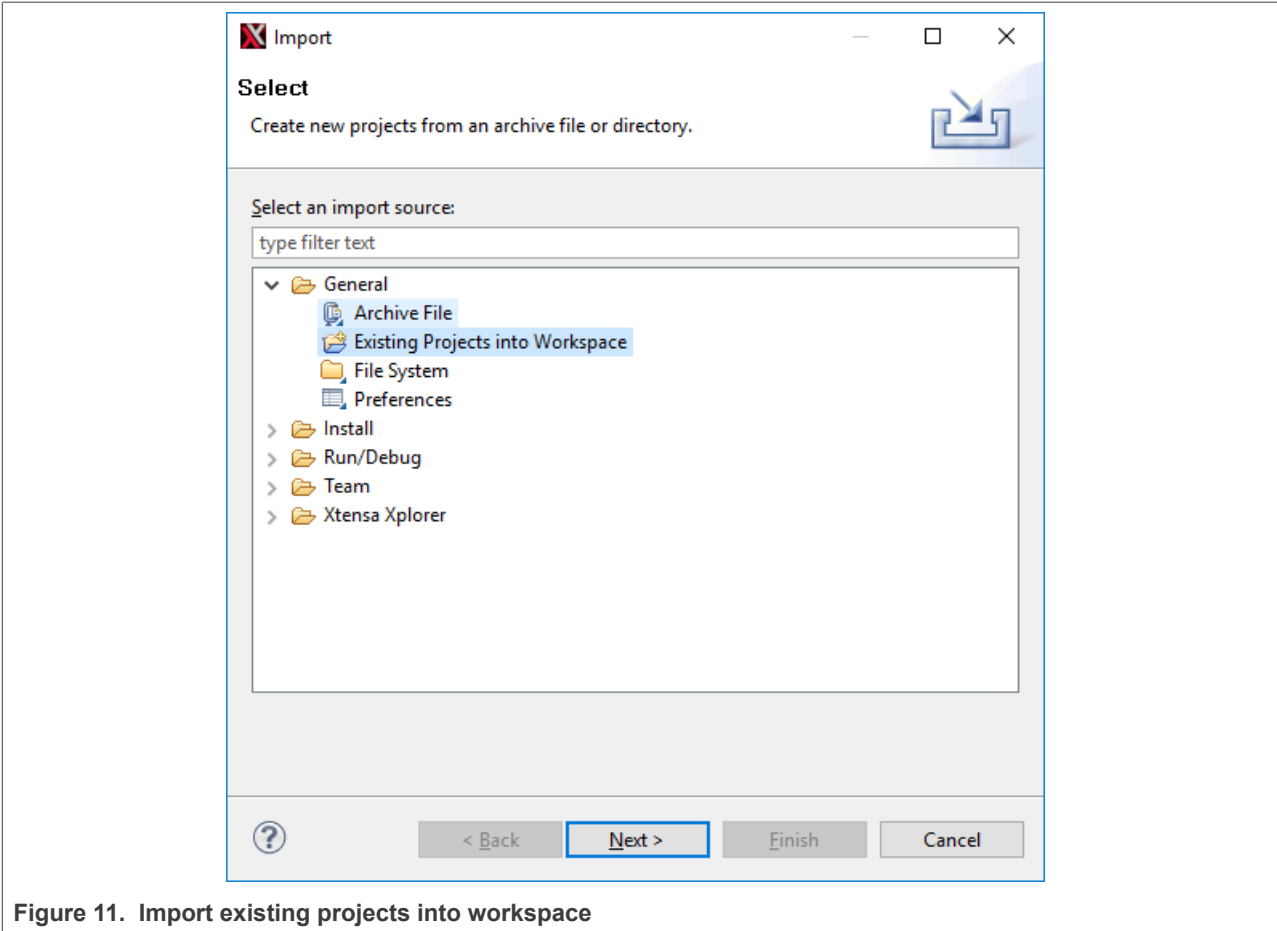


Figure 11. Import existing projects into workspace

- 2. Select SDK directory <SDK\_ROOT>\boards\evkmimxrt595\dsp\_examples\hello\_world\_usart\fusionf1\xtensa as root directory and leave all other check boxes blank as default.

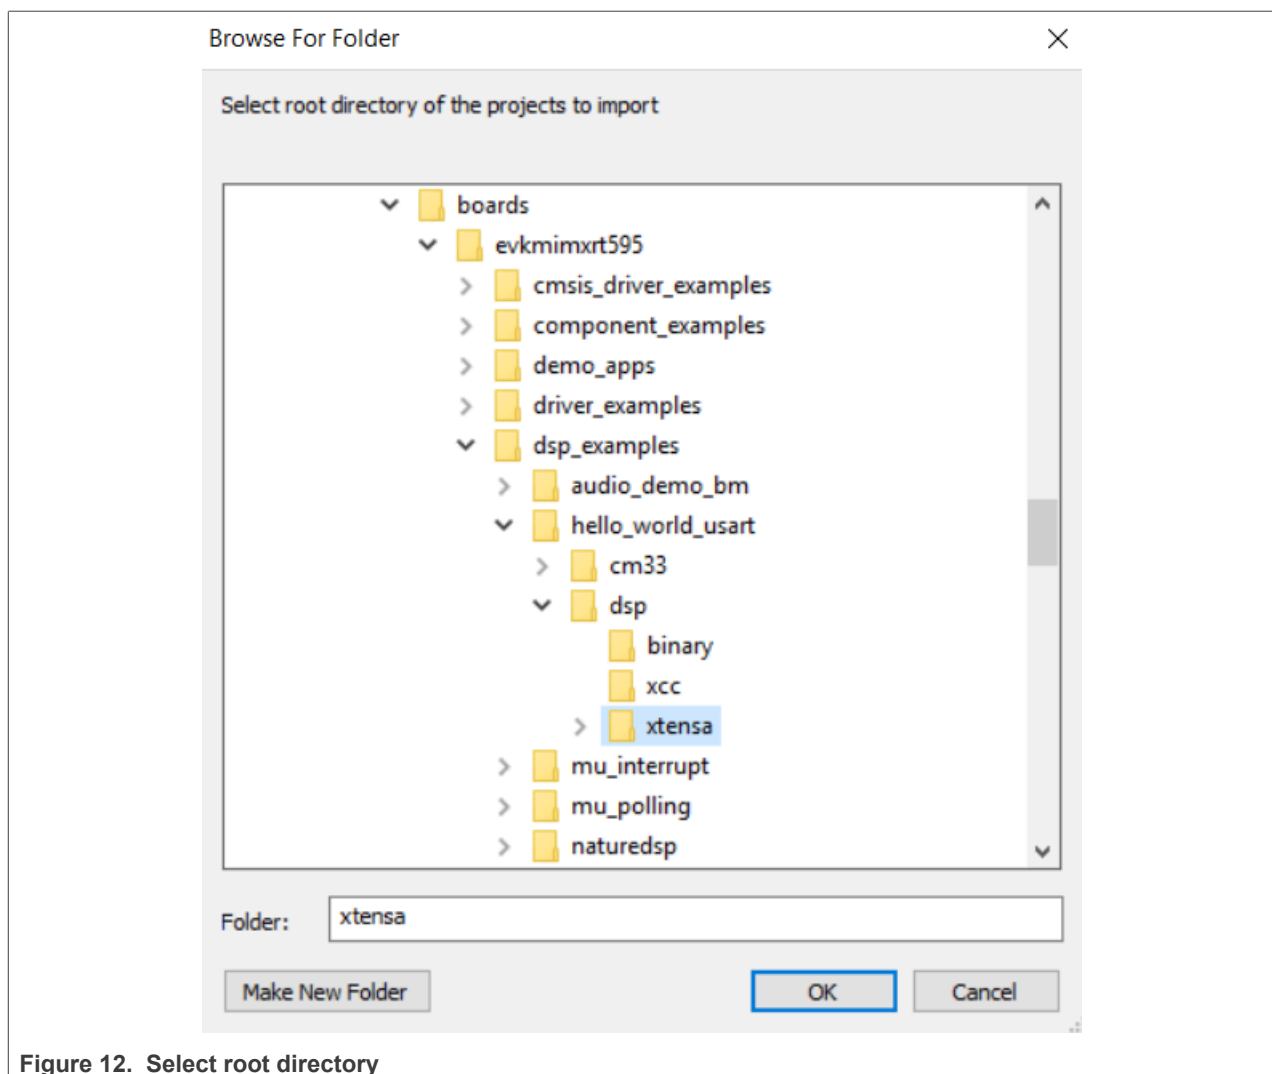


Figure 12. Select root directory

3. Click **OK**.

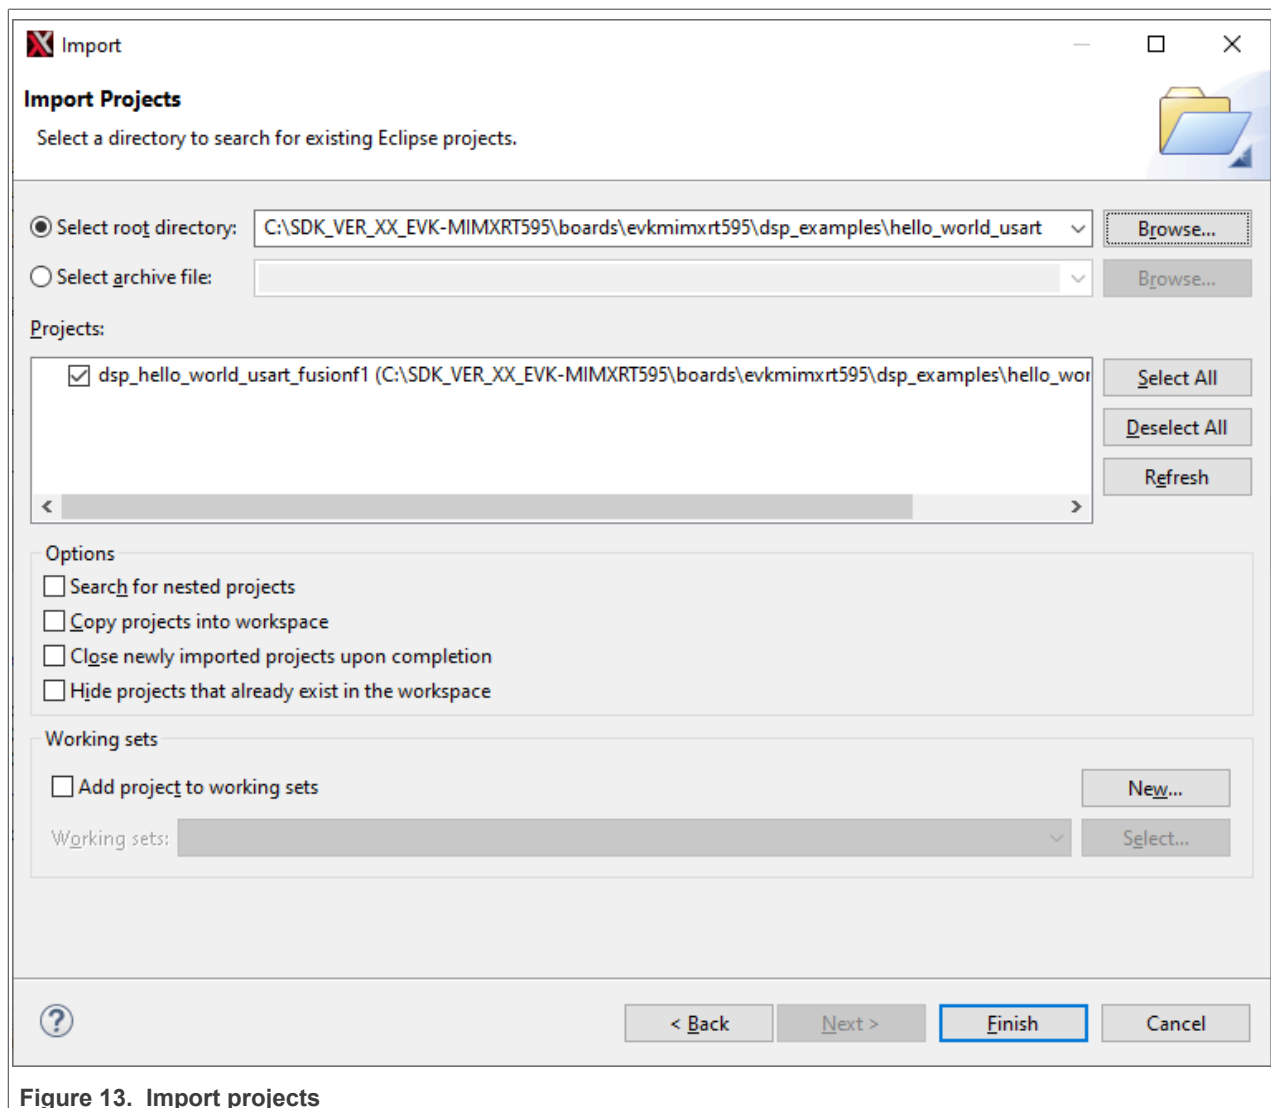


Figure 13. Import projects

- Click the **Finish** button.

The 'dsp\_hello\_world\_usart\_fusionf1' project appears in the **Project Explorer**.

### 4.3 DSP Linking Profiles

The Xtensa Software Tools use linker support packages (LSPs) to link a Fusion DSP application for the RT500. An LSP includes both a system memory map and a collection of libraries to include into the final binary. These LSPs are provided in the MCUXpresso SDK under <SDK\_ROOT>/devices/MIMXRT595S/xtensa/.

DSP sample applications are configured to link against one of these custom LSPs. By default, 'Debug' targets links against the gdbio LSP which is intended to be used with an attached debugger and captures I/O requests (printf) through gdb. The 'Release' target links against the min-rt LSP which includes minimal runtime support.

You can see and change which LSP is being actively used by the project target in the Xplorer IDE in the Linker menu of the project.

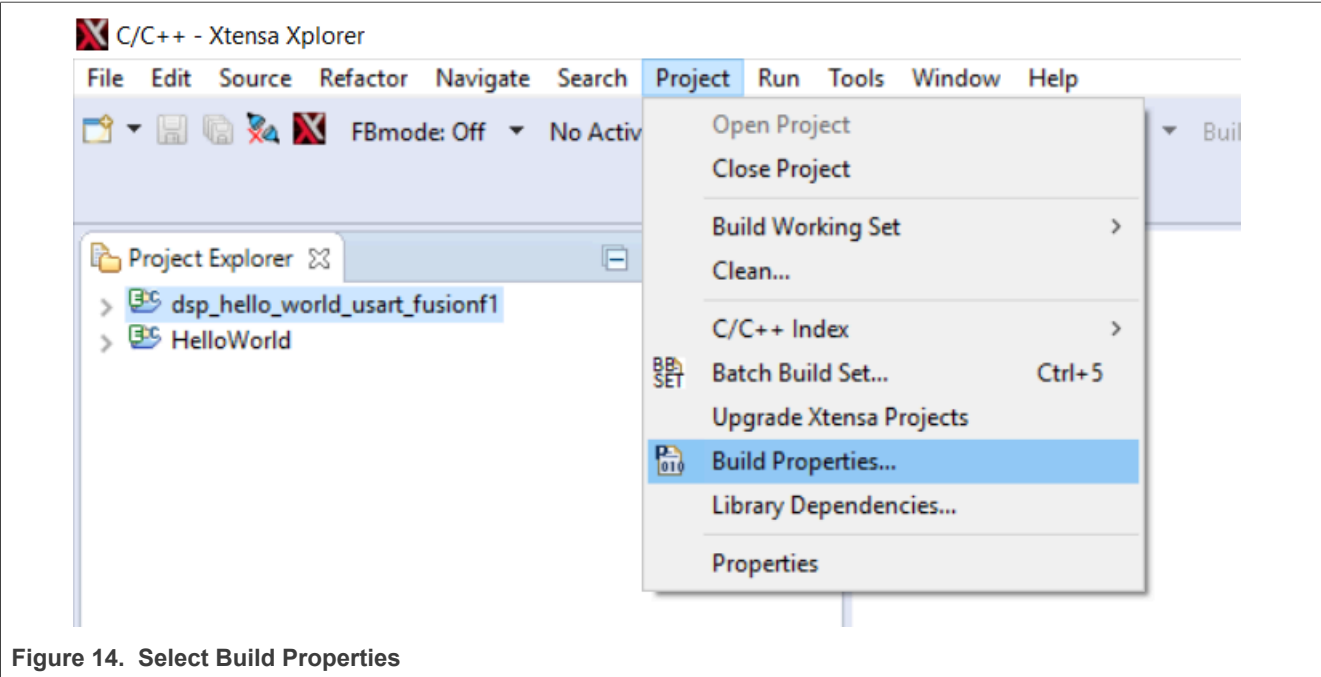


Figure 14. Select Build Properties

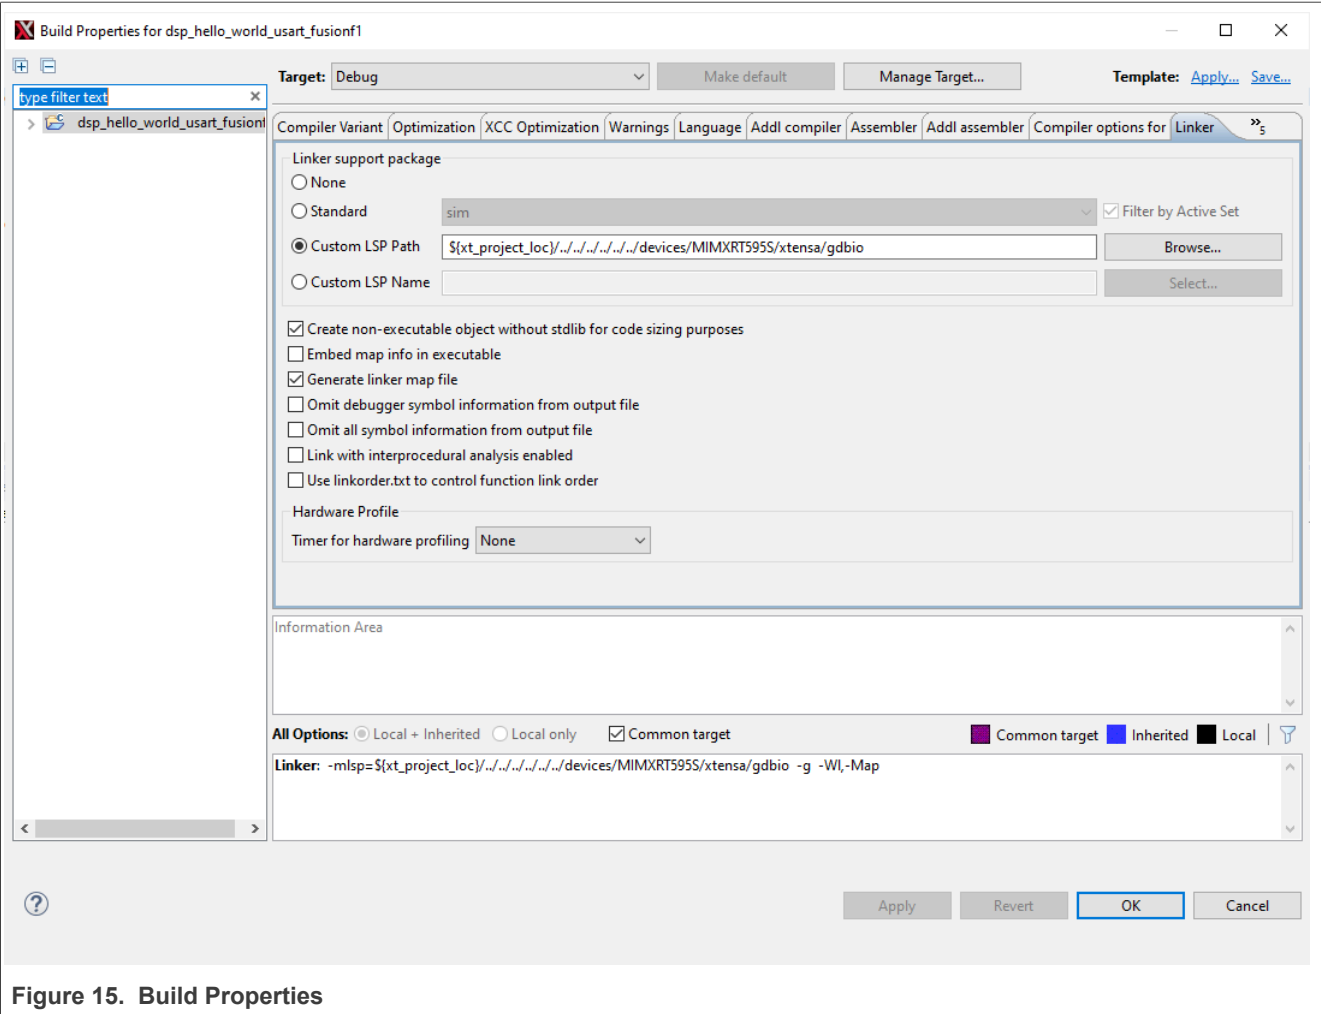


Figure 15. Build Properties

The MCUXpresso SDK ships with other standard LSPs for RT500. For more information on using LSPs and how to create a custom memory map using Xtensa software tools, see the Cadence Linker Support Packages (LSPs) Reference Manual.

#### 4.4 Build the Xplorer project.

To make a build selection for the project and hardware target configuration, use the drop-down buttons on the menu bar.




Figure 16. Build selection

#### 4.5 Start Xtensa Debugger Daemon

Connect the EVK board to a PC via the USB debug interface (J40) and open up a serial interface on your PC using a terminal tool such as Tera term or PuTTY on Windows or screen on Linux.

Remove Jumpers JP17, JP18, JP19 for SWD to connect to the chip and Serial interface on J40.



1. Load CM33 hello\_world\_usart you build from step 3.1 using J-link
2. To debug DSP applications on RT500, you must have the xt-ocd daemon up running. This application runs a gdb server that the Xtensa core debugger connects with.
3. Go to the command-line window and cd to xt-ocd daemon installation path. By default, it is C:\Program Files (x86)\Tensilica\Xtensa OCD Daemon 14.11 on Windows.
4. Update the topology.xml file with your J-link serial number. Topology.xml file: Edited J-link serial number in usbser field. Ensure dap = 1 in order for it to work.

```
<configuration>
  <controller id='Controller0' module='jlink' usbser='600112004' type='swd' speed='1000000' locking='1' />

  <driver id='XtensaDriver0' dap='1' xdm-id='12' module='xtensa' step-intr='mask,stepover,setps' />
  <chain controller='Controller0'>
    <tap id='TAP0' irwidth='4' />
  </chain>
  <system module='jtag'>
    <component id='Component0' tap='TAP0' config='trax' />
  </system>
  <device id='Xtensa0' component='Component0' driver='XtensaDriver0' ap-sel='3' />
  <application id='GDBStub' module='gdbstub' port='20000' sys-reset='0'>
    <target device='Xtensa0' />
  </application>
</configuration>
```

Figure 17. Update the topology.xml file

5. Execute the daemon with your custom topology:

```
xt-ocd.exe -c topology.xml
```

```
C:\Program Files (x86)\Tensilica\Xtensa OCD Daemon 14.08>xt-ocd.exe -c topology.xml
XOCD 14.08 2021-12-11 11:19:04
(c) 1999-2022 Cadence Design Systems Inc. All rights reserved.
[Debug Log 2022-02-23 17:41:15]
Loading module "gdbstub" v2.0.0.12
Loading module "jlink" v2.0.2.0
Using JLINK lib v.76002
Jlink USB Serial Number: 504500362
Connected to Jlink Device:
  Name:'SEGGER J-Link Ultra'
  S/N:504500362
  Firmware: J-Link Ultra V4 compiled Sep 24 2021 16:41:09
  Requested/Set TCK: 2000kHz/2000kHz
Jlink: Select pipelined SWD
SWD-DP with ID 0x6BA02477
Loading module "jtag" v2.0.0.20
Loading module "xtensa" v2.0.0.48
Starting thread 'GDBStub'
Opened GDB socket at port 20000
Initialize XDM driver
Warning: Warning: DAP Reset request failed! Ignoring...
```

Figure 18. Execute the daemon

**Note:** Some warning messages are expected and can be ignored. If you receive an error initializing the XDM driver, you may need to initialize and start the DSP core before debugging. For details, see [Section 3.3](#).

**Note:** For more information on xt-ocd runtime options and configuration, see Chapter 7 of the Xtensa Debug Guide (available in Help > PDF Documentation).

6. Use the action buttons on the right side of the menu bar to debug / profile / trace. A default debug configuration is provided by the SDK project which utilizes the on-chip debugger.

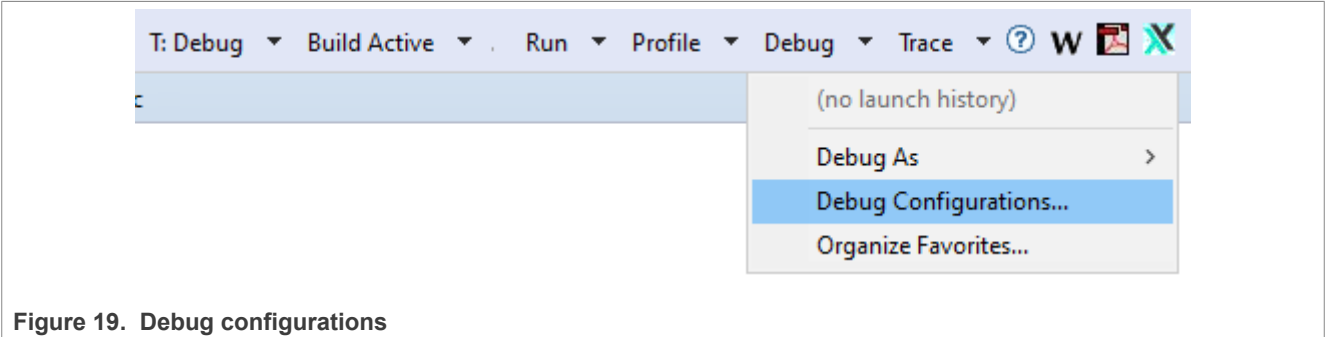


Figure 19. Debug configurations

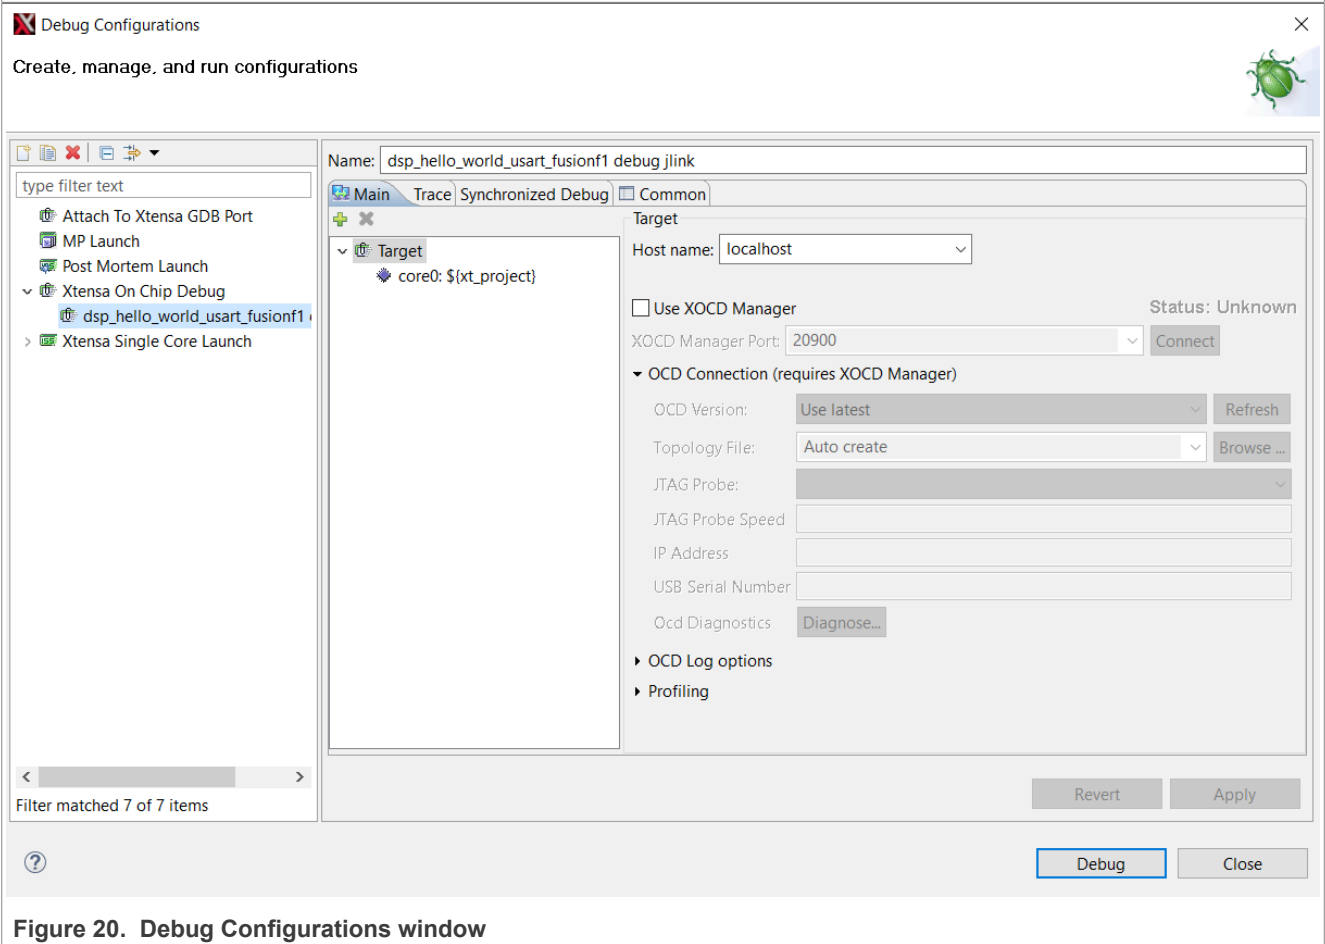


Figure 20. Debug Configurations window

7. Once the **Debug** button is selected, the actual debug on the chip starts. Xplorer prompts you to download binaries to the hardware.

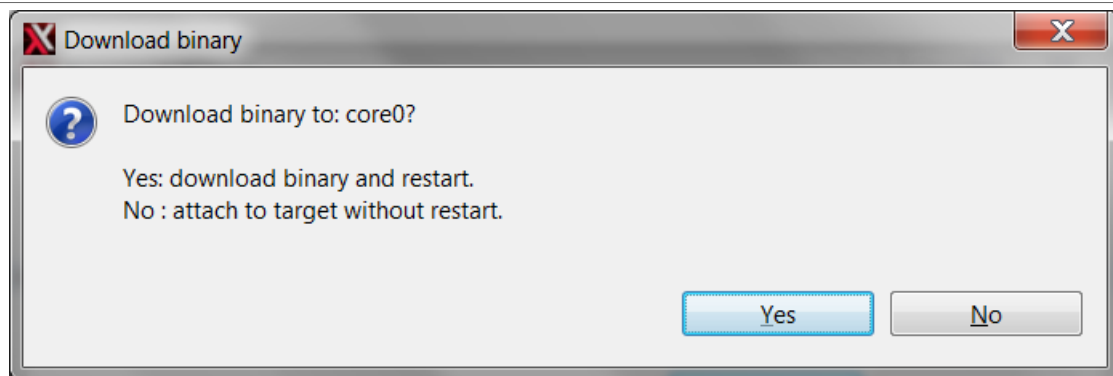


Figure 21. Download the binary to the core

8. Select **Yes**.
9. Xplorer IDE transitions to the **Debug** perspective after binary download.
10. After stepping through the 'printf' statement, the output appears in the Console view of the IDE.

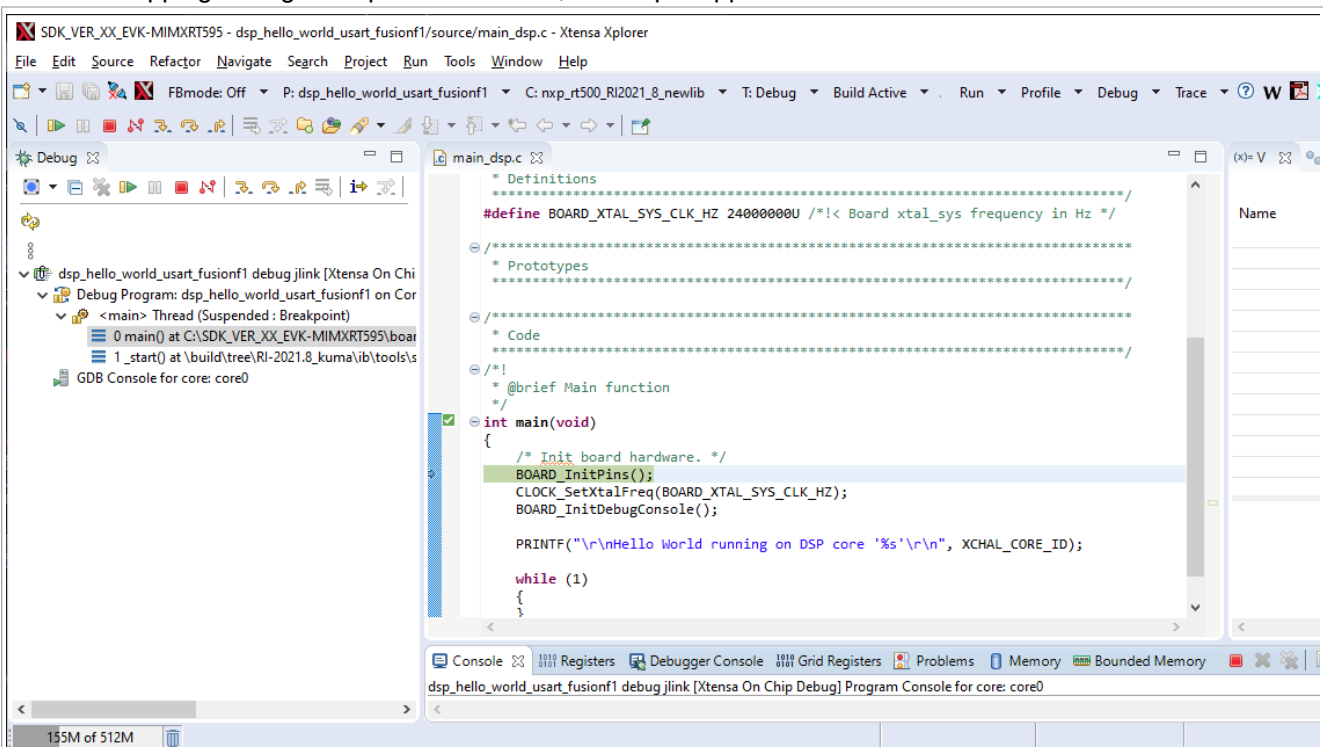


Figure 22. Output in the Console window

11. Hello World starts running on core nxp\_RT500\_RI23\_11\_newlib.
12. After the debug is complete, select the previous code perspective to return to the default IDE layout.

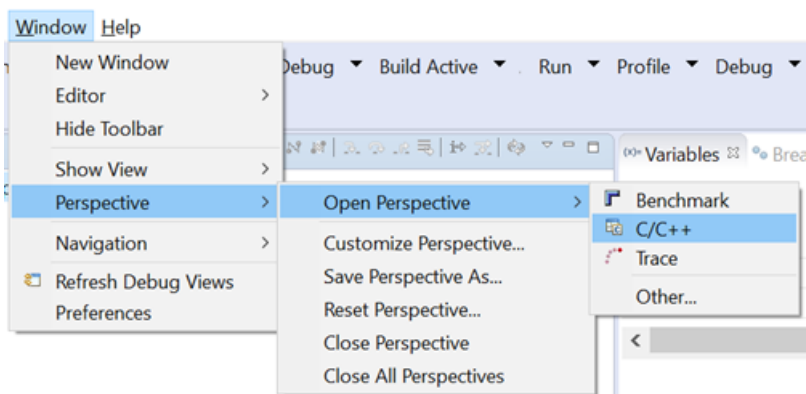


Figure 23. Return to the previous IDE layout

## 4.6 Run and Debug DSP Audio Framework

The DSP audio framework demo consists of separate applications that run on the Arm core and DSP core. The Arm application runs a command shell and relays the input requests to the DSP application using RPMsg-Lite.

### 4.6.1 EVK Board Setup for Audio Demo

The DSP audio demo is tested against EVK-MIMXRT595 and requires the CODEC line out (J4), and UART for serial console.

In order for the CODEC to output audio properly, you must attach two jumpers on the board as follows:

- JP7-1 is connected to JP8-2

The demo uses the UART for console input and output. Connect the EVK board to a PC via the USB debug interface (J40) and open up a serial interface on your PC using a terminal tool such as Tera term or PuTTY on Windows or screen on Linux.

- Remove Jumpers JP17, JP18, JP19 for SWD to connect to the chip and Serial interface on J40.
- DSP debugging is through SWD only, so connect J-Link to SWD interface.

### 4.6.2 Debug Audio Demo

To debug this DSP application, first set up, and execute the Arm application using an environment of your choosing (see 'Getting Started with MCUXpresso SDK for RT500.pdf' for Arm development environment options).

The example that follows uses NXP MCUXpresso IDE for the Arm environment.

1. Install the MCUXpresso SDK for RT500 into the MCUXpresso IDE using the 'Installed SDKs' panel at the bottom:
2. Use the QuickStart menu on the lower left of the screen to import an example from the installed SDK.

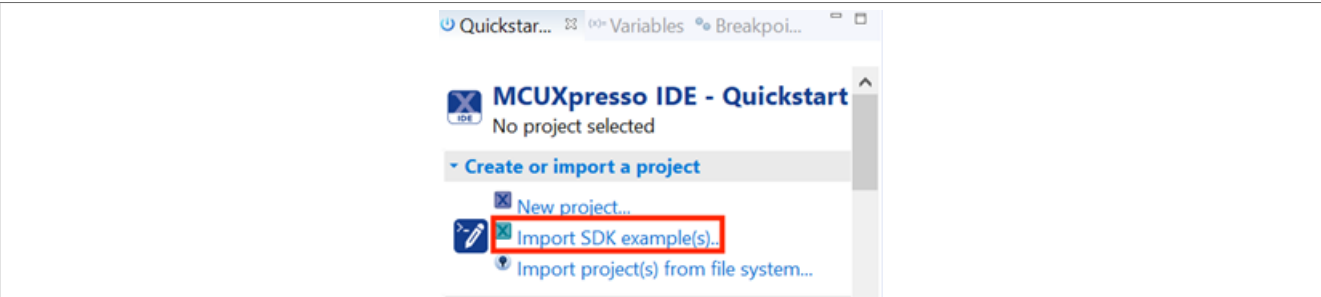


Figure 24. Select Import SDK examples from the QuickStart menu

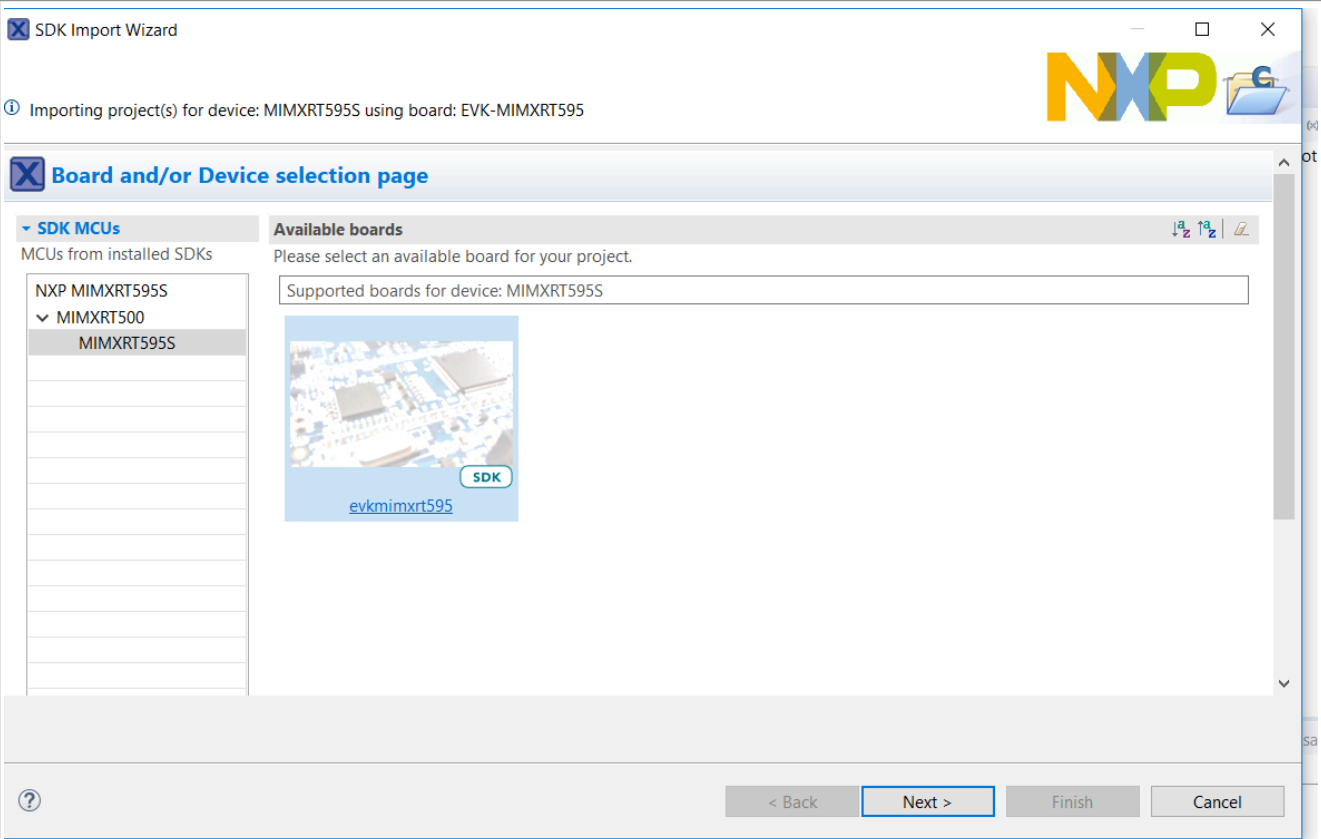


Figure 25. SDK Import wizard

3. Select the 'dsp\_xaf\_record\_cm33' example for Cortex-M33 core.
4. Select UART in project options after clicking the dsp\_xaf\_record\_cm33 example project.

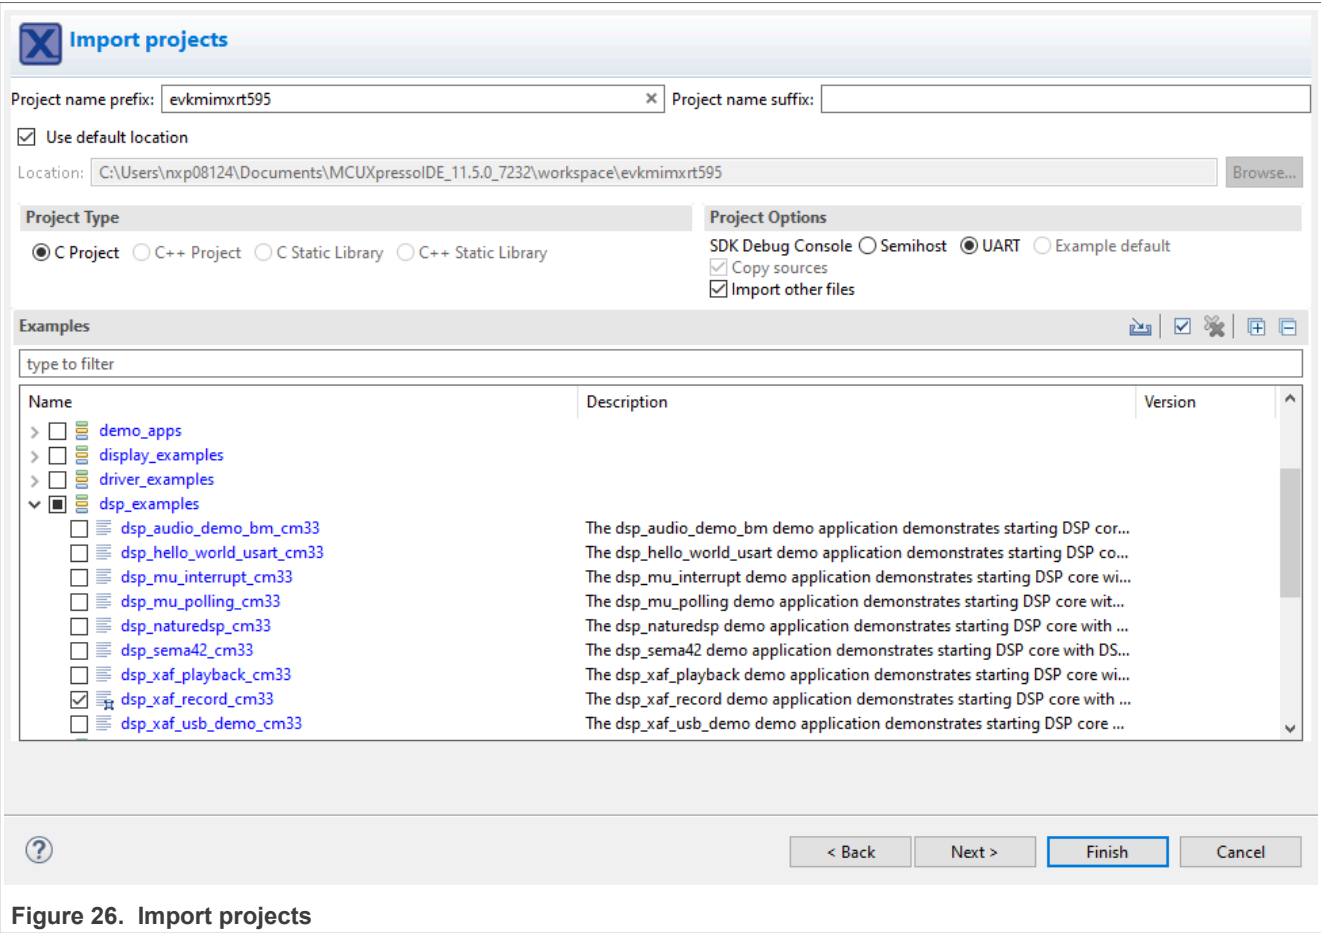


Figure 26. Import projects

5. Select 'Finish' to complete the import.

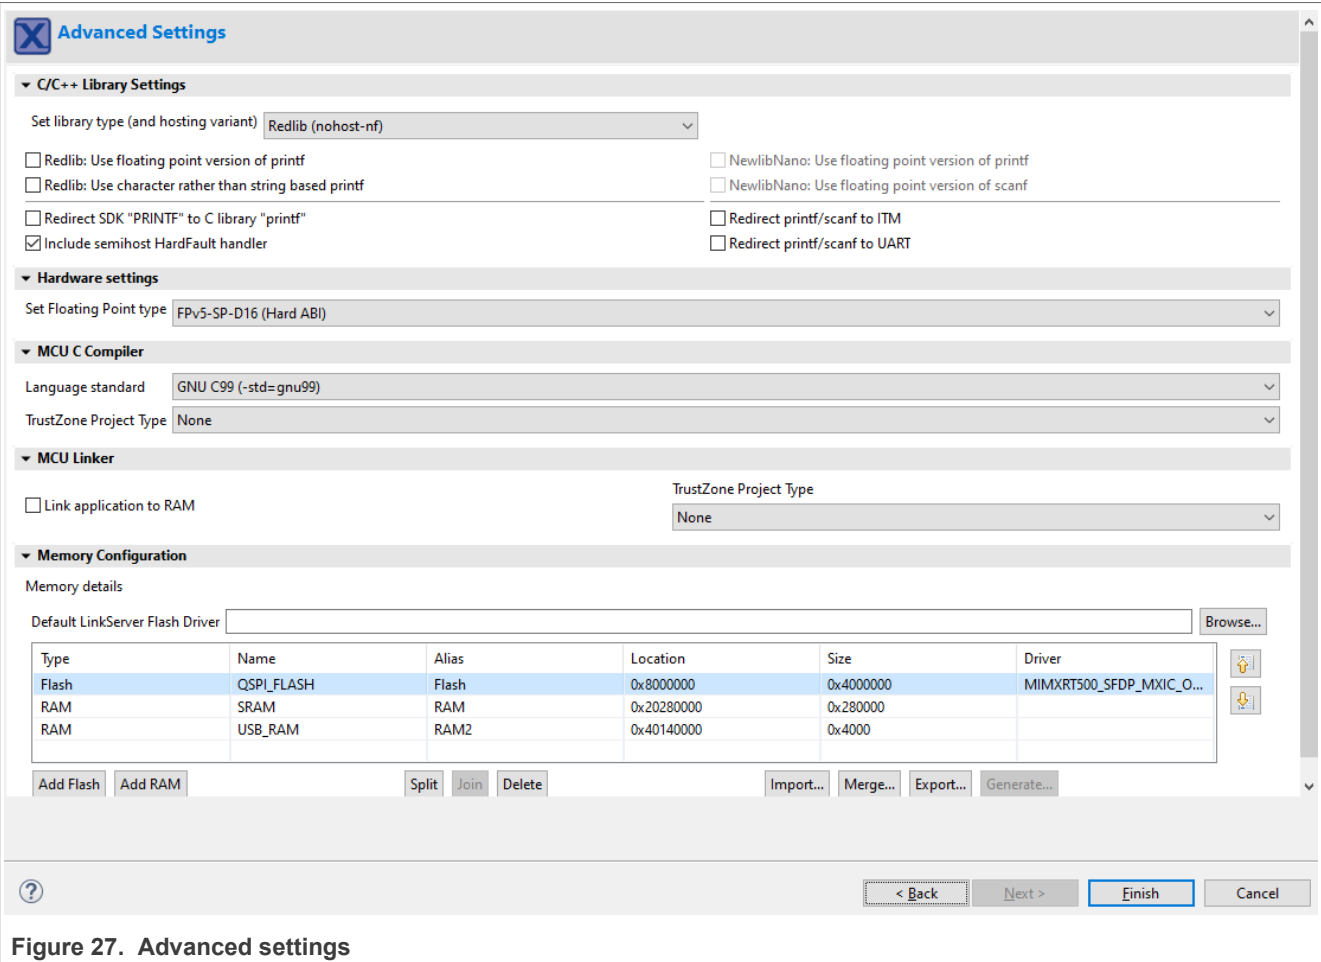


Figure 27. Advanced settings

6. Build the project and launch the debugger on success.

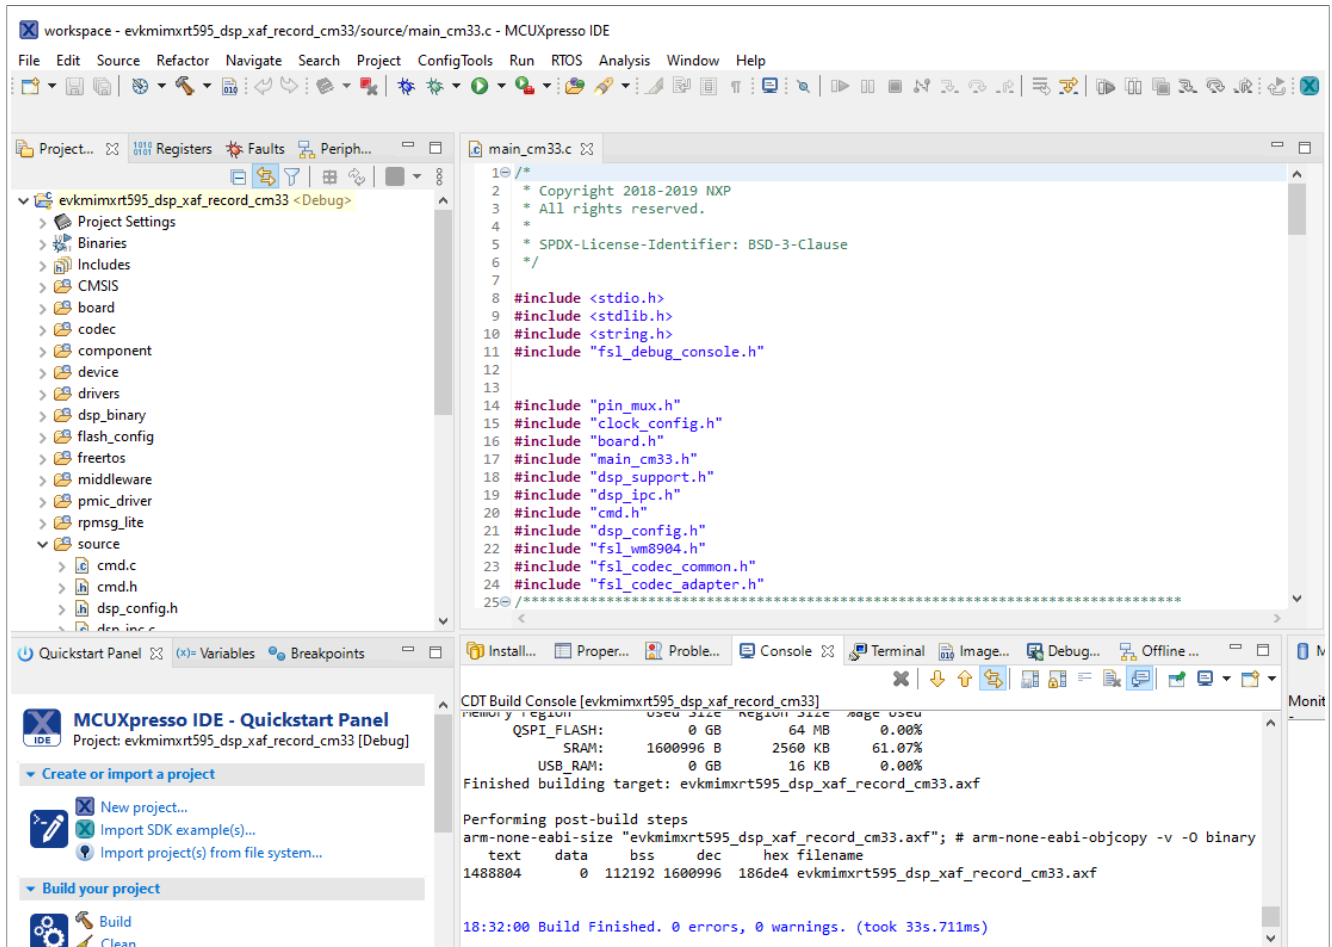


Figure 28. Build and debug the project

7. Use the debug toolbar to resume the code execution.

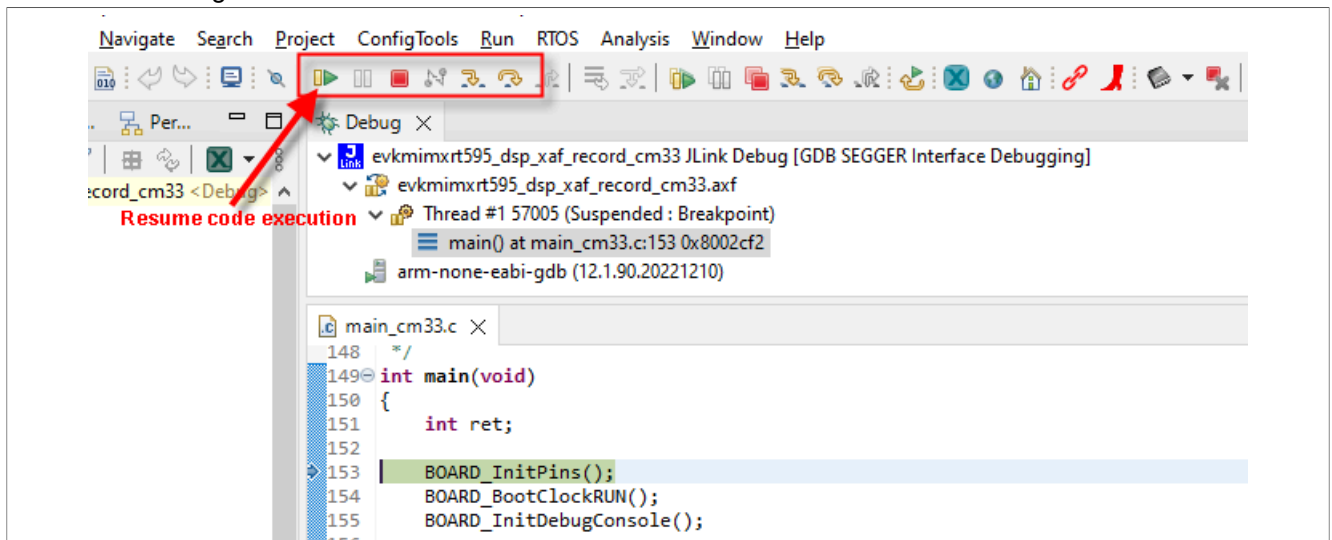


Figure 29. Resume the code execution

8. Observe serial terminal output with shell prompt:

```
*****
```



```
DSP audio framework demo start
*****

[CM33 Main] Configure WM8904 codec

[DSP_Main] Cadence Xtensa Audio Framework
[DSP_Main] Library Name      : Audio Framework (Hostless)
[DSP_Main] Library Version   : 3.2
[DSP_Main] API Version       : 3.0

[DSP_Main] start
[DSP_Main] established RPSmsg link
[CM33 Main] DSP image copied to DSP TCM
[CM33 Main][APP_DSP_IPC_Task] start
[CM33 Main][APP_Shell_Task] start

Copyright 2022 NXP
```

9. In the Xplorer IDE, load and execute `xaf_record` using the procedure described in sections 3.4 and 3.5 of this document.
10. After the DSP application runs, use the serial shell to invoke the `record_dmic [language]` command. For information on supported language, check the VIT ReleaseNotes.txt. Using the serial shell creates an audio pipeline that captures microphone audio, perform voice recognition (VIT), and playback via the codec speaker line out (J4 on the EVK).

```
>> help
"help": List all the registered commands
"exit": Exit program
"version": Query DSP for component versions
"record_dmic": Record DMIC audio , perform voice recognition (VIT) and
playback on codec
USAGE: record_dmic [language]
```

For voice recognition, say the supported wake-word and in 3 s say the frame-supported command. If selected model contains strings, then the wake-word and list of commands appear in the console.

**Note:** This command does not return to the shell.

The VIT wake-word and supported commands appear in the serial terminal.

11. See the *readme.txt* for jumper settings on the board as shown below.

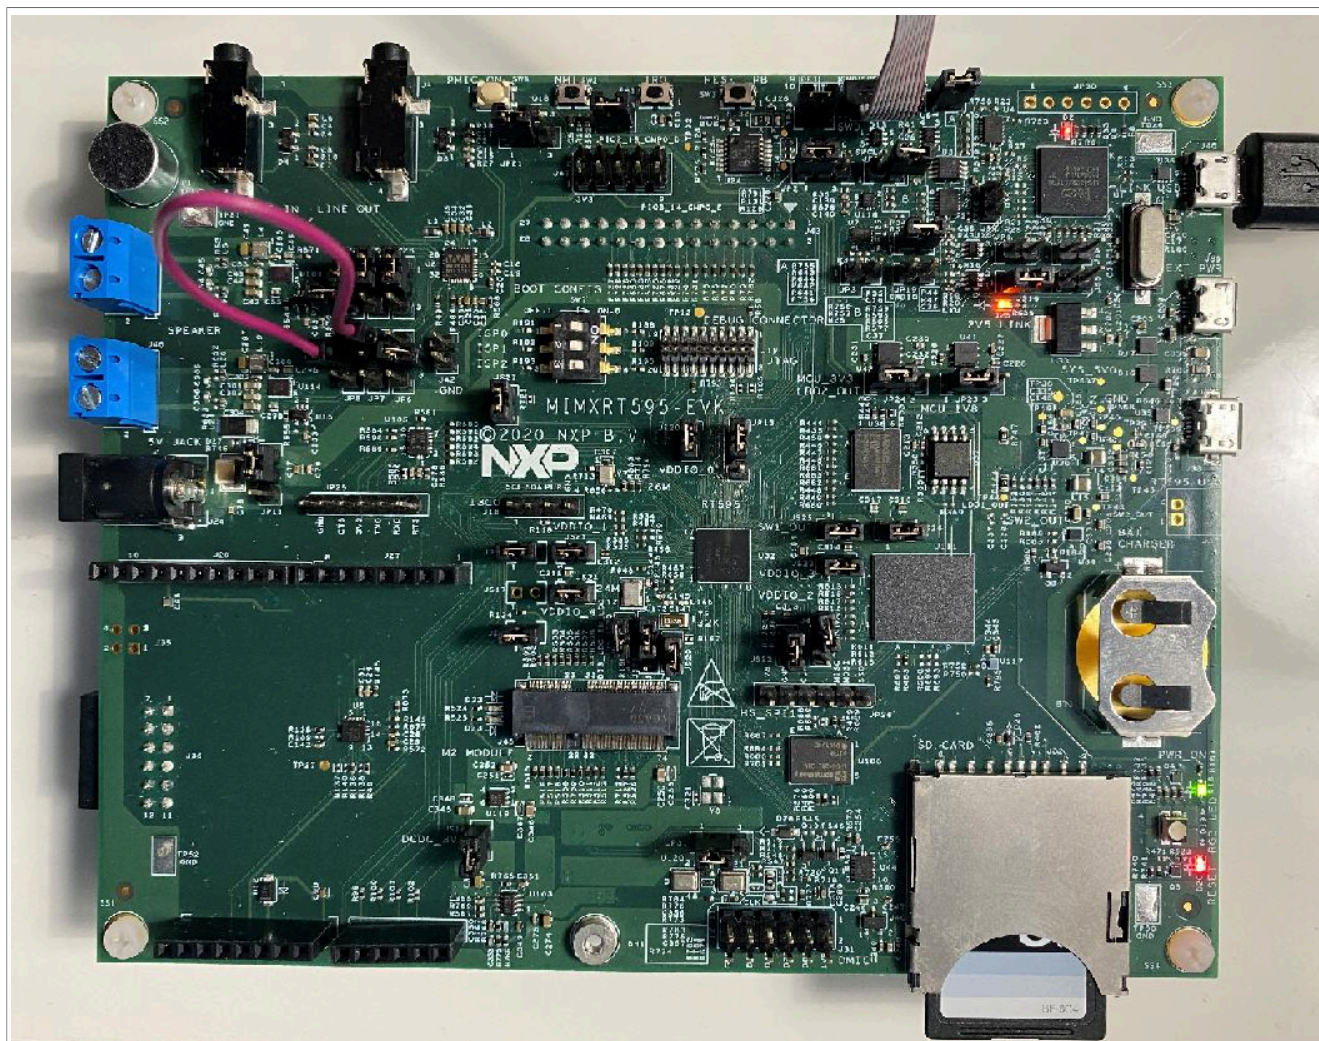


Figure 30. MIMXRT595-EVK Board

## 4.7 Launch DSP Application from Arm Core

In the previous example, the Arm application and DSP application were independently loaded and debugged. This section shows how to produce an Arm application binary that includes and starts the DSP application without the use of a debugger/loader.

The Arm core application for each DSP demo uses a global preprocessor macro to control loading of the DSP binary application:

`DSP_IMAGE_COPY_TO_RAM`

This macro is set to 1 by default. When this macro is set to '1'/TRUE, it instructs the DSP demo application to do the following:

- Link the DSP application binary images into the Arm binary
- Copy the DSP application images into RAM on program boot
- Initialize the DSP to run from the RAM image

**Note:** Ensure that this macro is supplied to both the C compiler and assembler when modifying the Arm project.

To build the DSP application image so it can be used by the Arm application, you must select the 'Release' target in Xplorer IDE (building with min-rt LSP – see section 2.4 for more information).

File Refactor Navigate Search Project Run Tools Window Help

FBmode: Off P: dsp\_hello\_world\_usart\_fusionf1 C: nxp\_rt500\_RI2021\_8\_newlib T: Release Build Active

Three DSP binaries are generated.

```
<SDK_ROOT>\boards\evkmimxrt595\dsp_examples\xaf_record\dsp\binary\dsp_text_release.bin
<SDK_ROOT>\boards\evkmimxrt595\dsp_examples\xaf_record\dsp\binary\dsp_data_release.bin
<SDK_ROOT>\boards\evkmimxrt595\dsp_examples\xaf_record\dsp\binary\dsp_reset_release.bin
```

**Note:** Depending on the environment used, you may need to manually copy these binary images into your Arm application workspace.

## 5 Run and Debug from Command-Line Environment / LINUX

RT500 SDK has been configured to be as flexible as possible to support multiple toolchains, including ARMGCC and XCC command-line environment. The principles and essentials are still the same as with the IDE. Command-line environment settings are nearly identical between WIN32 and LINUX, just with a few different path settings.

### 5.1 Build and Debug Arm Application

The Arm application requires the GNU Arm Embedded Toolchain and CMake version 3.x for command line compile and linking. See the 'Getting Started with MCUXpresso SDK for RT500.pdf' in the <SDK\_ROOT>/docs/ directory for more information on installation and configuration of required build tools for command line development.

1. Launch a command prompt / terminal and change directory to the xaf\_record application.

```
user@linux:~/SDK/boards/evkmimxrt595/dsp_examples/xaf_record/cm33/Armgcc$ ls -l
-rw-r--r-- 1 user user 12288 Jan 10 10:10 build_all.bat
-rw-r--r-- 1 user user 12288 Jan 10 10:10 build_all.sh
-rw-r--r-- 1 user user 12288 Jan 10 10:10 build_debug.bat
-rw-r--r-- 1 user user 12288 Jan 10 10:10 build_debug.sh
-rw-r--r-- 1 user user 12288 Jan 10 10:10 build_flash_debug.bat
-rw-r--r-- 1 user user 12288 Jan 10 10:10 build_flash_debug.sh
-rw-r--r-- 1 user user 12288 Jan 10 10:10 build_flash_release.bat
-rw-r--r-- 1 user user 12288 Jan 10 10:10 build_flash_release.sh
-rw-r--r-- 1 user user 12288 Jan 10 10:10 build_release.bat
-rw-r--r-- 1 user user 12288 Jan 10 10:10 build_release.sh
-rw-r--r-- 1 user user 12288 Jan 10 10:10 clean.bat
-rw-r--r-- 1 user user 12288 Jan 10 10:10 clean.sh
-rw-r--r-- 1 user user 12288 Jan 10 10:10 CMakeLists.txt
```

2. Use .bat files to build the configuration on Windows, and .sh files on Linux/UNIX.

```
user@linux:~/SDK/boards/evkmimxrt595/dsp_examples/xaf_record/cm33/Armgcc$ ./build_debug.sh
...
[100%] Linking C executable debug/dsp_xaf_record_cm33.elf
[100%] Built target dsp_xaf_record_cm33.elf
```

3. Launch the GDB server (NOTE: J-Link requires version >= 6.46).

```
user@linux:/opt/JLink$ ./JLinkGDBServerCLExe -device MIMXRT595_M33 -if SWD
SEGGER J-Link GDB Server V6.46j Command Line Version
...
Listening on TCP/IP port 2331
Connecting to target...Connected to target
Waiting for GDB connection...
```

#### 4. Connect with GDB to the device and load Arm application.

```

user@jlinux:~/SDK/boards/evkmimxrt595/dsp_examples/xaf_record/cm33/Armgcc$ Arm-none-eabi-gdb
debug/dsp_xaf_demo_cm33.elf
...
Reading symbols from debug/dsp_xaf_record_cm33.elf...
(gdb) target remote localhost:2331
Remote debugging using localhost:2331
0x1301ec7a in ?? ()
(gdb) mon reset
Resetting target
(gdb) load
Loading section .flash_config, size 0x200 lma 0x7f400
Loading section .interrupts, size 0x130 lma 0x80000
Loading section .text, size 0xe330 lma 0x80130
Loading section CodeQuickAccess, size 0x52c lma 0x8e460
Loading section .Arm, size 0x8 lma 0x8e98c
Loading section .init_array, size 0x4 lma 0x8e994
Loading section .fini_array, size 0x4 lma 0x8e998
Loading section .data, size 0x104 lma 0x8e99c
Start address 0x801e4, load size 60576
Transfer rate: 272 KB/sec, 5506 bytes/write.
(gdb) b main
Breakpoint 1 at 0x808f2: file /SDK/boards/src/dsp_examples/xaf_record/cm33/main_cm33.c,
line 161.
(gdb) c
Continuing.
Breakpoint 1, main ()
at /SDK/boards/src/dsp_examples/xaf_record/cm33/main_cm33.c:161
161     BOARD_InitHardware();

```

## 5.2 Build and Debug DSP Application

The Xtensa command line toolchain is installed as part of the Xplorer IDE. The tools can optionally be installed on a new Windows or Linux system without the IDE using the redistributable compressed file found under <XTENSA\_ROOT>/XtDevTools/downloads/RI-2023.11/tools/. For details, see [Section 2.5](#).

In order to use the command line tools, some environment variables need to be setup that are used by the cmake build scripts:

```

# Add tools binaries to PATH. Assume ~/xtensa/ is install root - please adjust accordingly.
export PATH=$PATH:~/xtensa/XtDevTools/install/tools/RI-2023.11-linux/XtensaTools/bin
# (Optional) Use environment variable to control license file
# NOTE: ~/.flexlmrc will override this selection. Please delete that file before proceeding.
export LM_LICENSE_FILE=~/.RT500.lic
# Setup env vars needed for compile and linking
export XCC_DIR=~/.xtensa/XtDevTools/install/tools/RI-2023.11-linux/XtensaTools
export XTENSA_SYSTEM=~/.xtensa/XtDevTools/install/builds/RI-2023.11-linux/nxp_RT500_RI23_11_newlib/
export XTENSA_CORE=nxp_RT500_RI23_11_newlib

```

**Note:** On Windows, you can use the 'setx' command instead of 'export' to set environment variables.

1. Use the batch/shell script to build out the DSP application from the command-line, in the 'xcc' directory.

```

user@linux:~/SDK/boards/evkmimxrt595/dsp_examples/xaf_record/dsp/xcc$ ./build_debug.sh
...
[100%] Built target dsp_xaf_record_fusion1.elf

```

**Note:** Some warnings during the linking process (floating point ABI) may appear – these are normal and can be ignored.

2. Launch xt-ocd debugging server (replace topology.xml with your custom version – see section 1.5 of this document):

```

user@linux:/opt/Tensilica/xocd-14.11$ ./xt-ocd.exe -c topology.xml

```

**Note:** If the xt-ocd daemon fails to start, it may be because the DSP has not been initialized by the ARM core which must be done first.

### 3. Connect with Xtensa GDB to the device and execute the DSP application:

```

user@linux:/SDK/boards/evkmimxrt595/dsp_examples/xaf_record/dsp/xcc$ xt-gdb debug/
dsp_xaf_demo_fusion1.elf
GNU gdb (GDB) 7.11.1 Xtensa Tools <VERSION_INFO>
...
Reading symbols from debug/dsp_xaf_record_fusion1.elf...done.
(xt-gdb)
(xt-gdb) target remote localhost:20000
Remote debugging using localhost:20000
_DoubleExceptionVector ()
at /home/xpgcust/tree/RI-2023.11/ib/tools/swtools-x86_64-linux/xtensa-elf/src/xos/src/
xos_vectors.S:216
216 /home/xpgcust/tree/RI-2023.11/ib/tools/swtools-x86_64-linux/xtensa-elf/src/xos/src/
xos_vectors.S: No such file or directory.
(xt-gdb) reset
_ResetVector ()
at /home/xpgcust/tree/RI-2023.11/ib/tools/swtools-x86_64-linux/xtensa-elf/src/xtos/xea2/reset-
vector-xea2.S:71
71 /home/xpgcust/tree/RI-2023.11/ib/tools/swtools-x86_64-linux/xtensa-elf/src/xtos/xea2/reset-
vector-xea2.S: No such file or directory.
(xt-gdb) load
Loading section .rtos.rodata, size 0x80 lma 0x200000
Loading section .rodata, size 0x17d50 lma 0x200080
Loading section .text, size 0x633f0 lma 0x217dd0
Loading section .rtos.percpu.data, size 0x4 lma 0x27b1c0
Loading section .data, size 0x110c lma 0x27b1d0
Loading section NonCacheable, size 0x2960 lma 0x20040000
Loading section .Level3InterruptVector.literal, size 0x4 lma 0x24000000
Loading section .DebugExceptionVector.literal, size 0x4 lma 0x24000004
Loading section .NMIEExceptionVector.literal, size 0x4 lma 0x24000008
Loading section .ResetVector.text, size 0x13c lma 0x24020000
Loading section .WindowVectors.text, size 0x16c lma 0x24020400
Loading section .Level2InterruptVector.text, size 0x1c lma 0x2402057c
Loading section .Level3InterruptVector.text, size 0xc lma 0x2402059c
Loading section .DebugExceptionVector.text, size 0xc lma 0x240205bc
Loading section .NMIEExceptionVector.text, size 0xc lma 0x240205dc
Loading section .KernelExceptionVector.text, size 0xc lma 0x240205fc
Loading section .UserExceptionVector.text, size 0x18 lma 0x2402061c
Loading section .DoubleExceptionVector.text, size 0x8 lma 0x2402063c
Start address 0x24020000, load size 520016
Transfer rate: 8 KB/sec, 10612 bytes/write.
(xt-gdb) b main
Breakpoint 1 at 0x21ab5b: file /home/jlydick/mcu-sdk-2.0/boards/src/dsp_examples/xaf_record/dsp/
xaf_main_dsp.c, line 366.
(xt-gdb) c
Continuing.
Breakpoint 1, main ()
at /SDK/boards/src/dsp_examples/xaf_record/dsp/xaf_main_dsp.c:366
366      xos_start_main("main", 7, 0);
(xt-gdb) c
Continuing.
Initializing...
Initialized

```

**Note:** You can use the gdb command 'set substitute-path' to map the missing symbols from the toolchain libraries. For example: `set substitute-path /home/xpgcust/tree/RI-2023.11/ib/tools/swtools-x86_64-linux ~/xtensa/tools/RI-2023.11/XtensaTools`.

### 4. For more details about xt-gdb, see the Cadence GNU Debugger User's Guide and Cadence Xtensa Debug Guide. These are located at:

- `~/xtensa/XtDevTools/downloads/RI-2023.11/docs/gnu_gdb_ug.pdf`
- `~/xtensa/XtDevTools/downloads/RI-2023.11/docs/xtensa_debug_guide.pdf`

## 6 Note about the source code in the document

Example code shown in this document has the following copyright and BSD-3-Clause license:

Copyright 2024 NXP Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:



1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

## 7 Revision history

This table summarizes the revisions of this document.

Table 1. Revision history

Revision number	Date	Substantive changes
0	22 Feb 2021	Initial Draft
1	11 March 2022	Updated for MCUXpresso SDK 2.11.1
2	01 June 2022	Updated for MCUXpresso SDK 2.12.0
3	22 December 2022	Format updated for MCUXpresso SDK 2.13.0
4	27 July 2023	Format updated for MCUXpresso SDK 2.14.0
5	10 January 2024	Format updated for MCUXpresso SDK 2.15.000

## Legal information

### Definitions

**Draft** — A draft status on a document indicates that the content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included in a draft version of a document and shall have no liability for the consequences of use of such information.

### Disclaimers

**Limited warranty and liability** — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of NXP Semiconductors.

**Right to make changes** — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use** — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

**Terms and conditions of commercial sale** — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <https://www.nxp.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Suitability for use in non-automotive qualified products** — Unless this document expressly states that this specific NXP Semiconductors product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NXP Semiconductors accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NXP Semiconductors' warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond NXP Semiconductors' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies NXP Semiconductors for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NXP Semiconductors' standard warranty and NXP Semiconductors' product specifications.

**Translations** — A non-English (translated) version of a document, including the legal information in that document, is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

**Security** — Customer understands that all NXP products may be subject to unidentified vulnerabilities or may support established security standards or specifications with known limitations. Customer is responsible for the design and operation of its applications and products throughout their lifecycles to reduce the effect of these vulnerabilities on customer's applications and products. Customer's responsibility also extends to other open and/or proprietary technologies supported by NXP products for use in customer's applications. NXP accepts no liability for any vulnerability. Customer should regularly check security updates from NXP and follow up appropriately. Customer shall select products with security features that best meet rules, regulations, and standards of the intended application and make the ultimate design decisions regarding its products and is solely responsible for compliance with all legal, regulatory, and security related requirements concerning its products, regardless of any information or support that may be provided by NXP.

NXP has a Product Security Incident Response Team (PSIRT) (reachable at [PSIRT@nxp.com](mailto:PSIRT@nxp.com)) that manages the investigation, reporting, and solution release to security vulnerabilities of NXP products.

**NXP B.V.** — NXP B.V. is not an operating company and it does not distribute or sell products.

### Trademarks

Notice: All referenced brands, product names, service names, and trademarks are the property of their respective owners.

**NXP** — wordmark and logo are trademarks of NXP B.V.

AMBA, Arm, Arm7, Arm7TDMI, Arm9, Arm11, Artisan, big.LITTLE, Cordio, CoreLink, CoreSight, Cortex, DesignStart, DynamIQ, Jazelle, Keil, Mali, Mbed, Mbed Enabled, NEON, POP, RealView, SecurCore, Socrates, Thumb, TrustZone, ULINK, ULINK2, ULINK-ME, ULINK-PLUS, ULINKpro,  $\mu$ Vision, Versatile — are trademarks and/or registered trademarks of Arm Limited (or its subsidiaries or affiliates) in the US and/or elsewhere. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved.

Cadence — the Cadence logo, and the other Cadence marks found at [www.cadence.com/go/trademarks](http://www.cadence.com/go/trademarks) are trademarks or registered trademarks of Cadence Design Systems, Inc. All rights reserved worldwide.



## Tables

Tab. 1.	Revision history .....	30
---------	------------------------	----

## Figures

Fig. 1.	Register to access .....	2	Fig. 16.	Build selection .....	16
Fig. 2.	Windows .....	3	Fig. 17.	Update the topology.xml file .....	17
Fig. 3.	Linux .....	3	Fig. 18.	Execute the daemon .....	17
Fig. 4.	Click CLICK TO GET A LICESNE KEY FOR RT500 SDK .....	4	Fig. 19.	Debug configurations .....	18
Fig. 5.	Install Xplorer and Xtensa tools license keys .....	5	Fig. 20.	Debug Configurations window .....	18
Fig. 6.	System overview .....	6	Fig. 21.	Download the binary to the core .....	19
Fig. 7.	Find and install a configuration build .....	6	Fig. 22.	Output in the Console window .....	19
Fig. 8.	Select the development board .....	9	Fig. 23.	Return to the previous IDE layout .....	20
Fig. 9.	Customize MCUXpresso IDE options .....	11	Fig. 24.	Select Import SDK examples from the QuickStart menu .....	21
Fig. 10.	DSP example applications .....	11	Fig. 25.	SDK Import wizard .....	21
Fig. 11.	Import existing projects into workspace .....	12	Fig. 26.	Import projects .....	22
Fig. 12.	Select root directory .....	13	Fig. 27.	Advanced settings .....	23
Fig. 13.	Import projects .....	14	Fig. 28.	Build and debug the project .....	24
Fig. 14.	Select Build Properties .....	15	Fig. 29.	Resume the code execution .....	24
Fig. 15.	Build Properties .....	16	Fig. 30.	MIMXRT595-EVK Board .....	26

## Contents

<b>1</b>	<b>Overview .....</b>	<b>2</b>
<b>2</b>	<b>Install Xplorer Toolchains .....</b>	<b>2</b>
2.1	Xtensa Software Tools Platform Support .....	2
2.2	Install the Xtensa Xplorer IDE and Tools .....	2
2.3	Install License Key .....	3
2.3.1	Identify PC MAC Address .....	3
2.3.2	Download License Key .....	4
2.4	Install RT500 DSP Build Configuration .....	5
2.5	Install Xtensa On Chip Debugger Daemon .....	6
2.6	Install Xtensa Software Tools without IDE .....	8
<b>3</b>	<b>Install MCUXpresso SDK .....</b>	<b>8</b>
3.1	Download MCUXpresso SDK for RT500 .....	8
3.2	MCUXpresso SDK DSP Enablement .....	9
3.3	DSP Core Initialization .....	9
<b>4</b>	<b>Run and Debug DSP Demo using</b>	
	<b>Xplorer IDE .....</b>	<b>10</b>
4.1	Prepare Arm Core for 'Hello World' .....	10
4.2	Prepare DSP Core for 'Hello World' .....	11
4.3	DSP Linking Profiles .....	14
4.4	Build the Xplorer project .....	16
4.5	Start Xtensa Debugger Daemon .....	16
4.6	Run and Debug DSP Audio Framework .....	20
4.6.1	EVK Board Setup for Audio Demo .....	20
4.6.2	Debug Audio Demo .....	20
4.7	Launch DSP Application from Arm Core .....	26
<b>5</b>	<b>Run and Debug from Command-Line</b>	
	<b>Environment / LINUX .....</b>	<b>27</b>
5.1	Build and Debug Arm Application .....	27
5.2	Build and Debug DSP Application .....	28
<b>6</b>	<b>Note about the source code in the</b>	
	<b>document .....</b>	<b>29</b>
<b>7</b>	<b>Revision history .....</b>	<b>30</b>
	<b>Legal information .....</b>	<b>31</b>

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.