
CRT42 G2 Trouble Shooting And FAQ List

Contents

CRT42 G2 Trouble Shooting And FAQ List	1
PMU2 - Overtemperature-Level1	6
PMU10 - PMU loop fault	6
PMU11 - PMU minor fault	6
PMU12 - PMU major fault	6
PMU13 - PMU no available battery	10
PMU35 - Overtemperature-Level2	10
PMU36 - Undervoltage	10
PMU37 - Overvoltage	10
PMU38 - Power supply output failure	10
PMU41 - No battery pack available	10
PMU46 - Relay (MOS) error	11
PMU47 - Pre-charge error	11
PMU48 - Pre-charge hardware error	11
PMU49 - Negative MOSFET temperature sensor error	11
PMU52 - Current sensor error	11
PMU57 - KSI Pre-MOS error	11
PMU59 - KSI MOS error	11
PMU61 - Battery pack 1 does not match	11
PMU62 - Battery pack 2 does not match	11
PMU63 - Battery pack 3 does not match	12
PMU64 - Battery pack 4 does not match	12
PMU65 - Battery pack 5 does not match	12
PMU66 - Battery pack 6 does not match	12
PMU67 - Abnormal charging status	12
T2 - Drive motor stalled	12
T4 - Motor overspeed protection	13
T5 - Motor encoder error	13
T6 - Controller phase loss	13
T7 - MOSFET error	14
T8 - Controller undervoltage	14

T9 - Controller overvoltage	14
T12 - Motor overtemperature	14
T13 - Controller overtemperature	15
T14 - Software Overcurrent	15
T15 - Hardware Overcurrent.....	15
T16 - Potentiometer error	15
T19 - Operating sequence error	16
T23 - Battery compartment (PMU)communication error	16
T24 - Battery compartment (PMU) shutdown	17
T27 - CAN timeout error - left blade	18
T29 - CAN timeout error - right blade	18
T31 - Seat switch verification error	18
TR32/TL32 - Software authentication error	19
MR1/ML1 - Motor positioning error	19
MR2/ML2 - Blade motor stalled	20
MR3/ML3 - Blade motor low speed	20
MR4/ML4 - Blade motor over speed	20
MR6/ML6 - Controller phase loss	21
MR7/ML7 - MOSFET error	21
MR8/ML8 - Controller undervoltage	21
MR9/ML9 - Controller overvoltage	21
MR13/ML13 - Controller overtemperature	22
MR14/ML14 - Software overcurrent	22
MR15/ML15 - Hardware overcurrent	22
MR19/ML19 - Operating sequence error	22
MR25/ML25 - CAN timeout error - left drive	23
MR26/ML26 - CAN timeout error - right drive	23
MR27/ML27 - CAN timeout error - left blade	23
MR29/ML29 - CAN timeout error - right blade	24
MR31/ML31 - Blade switch verification error	24
MR32/ML32 - Software authentication error	25

MR42/ML42 - Software version verification error	25
D1-CAN timeout with PMU	26
D3-CAN timeout with traction controller	27
D4-CAN timeout with left blade controller	28
D6-CAN timeout with right blade controller	29

Tools: Computer、CAN DEBUG TOOL (ERP: R0203845-00) 、16-Pin adapter (ERP: R0203075-00) 、Jack、Multimeter.



CAN DEBUG TOOL (ERP: R0203845-00) | 16-Pin adapter (ERP: R0203075-00)



Jack



Multimeter

PMU2 - Overtemperature-Level1

Stop the vehicle for a period of time to allow it to cool down, if the fault still have after restarting, replace the battery compartment.

PMU10 - PMU loop fault

At least one channel in the battery compartment is unable to discharge, but the performance will not decrease, vehicle still can be worked.

If you feel a decrease in mowing performance with this fault code, the battery compartment should be replaced.

PMU11 - PMU minor fault

There have occurred a over-current(Level 1) or over-temperature(Level 1) fault. The vehicle's performance will be limited with this code, but this fault can be restored, no need to pay attention.


PMU12 - PMU major fault

Check: Use "ToolsForCAN" to identify the detail fault -

1. "PreCharge Function Error" of PMU12


PMU FAULT LIST PART1			
Function	Status		
Avg Curr Overcurr	☒ 0: Normal	☐ 1: Avg Curr L1	
	☐ 2: Avg Curr L2	☐ 3: Spare	
PMUNeg. MOSOvertemp	☒ 0: Normal	☐ 1: OvertempL1	
	☐ 2: OvertempL2	☐ 3: NTCErr	
Peak Curr Overcurr	☒ 0: Normal	☐ 1: Error	
Feedback Curr Overcurr	☒ 0: Normal	☐ 1: Error	
PreCharge Function	☐ 0: Normal	☒ 1: Error	
PMU Software Auth	☒ 0: Normal	☐ 1: Error	
PMU Undervoltage Error	☒ 0: Normal	☐ 1: Error	
PMU Overvoltage Error	☒ 0: Normal	☐ 1: Error	

- ① Adjust the dial position of a multimeter to the diode position to measure the diode value of the controller's B+ and B- as shown in the picture below(Red lead to black wire(B-), black lead to red wire(B+)).
 - a. If the value is approximately equal to $0.7 \pm 0.2V$, you should replace a new battery compartment.
 - b. Otherwise follow the steps.

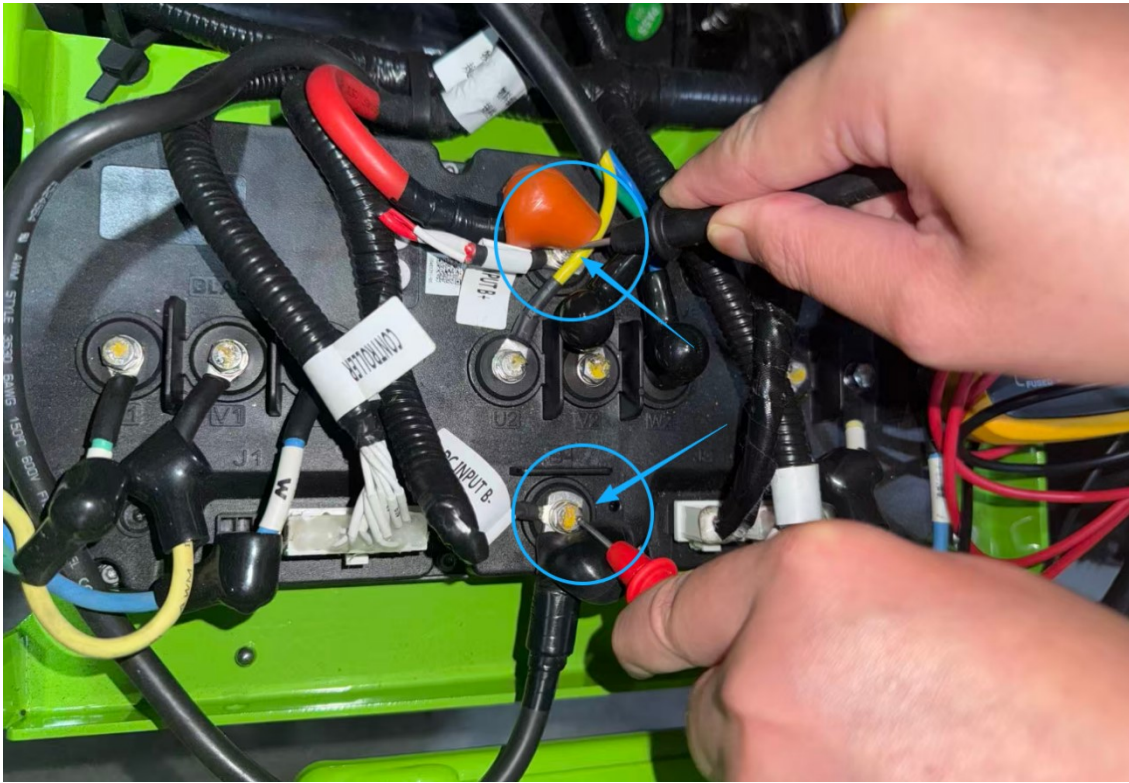



Correct value should be approximately equal to $0.7 \pm 0.2V$

- ② Disconnect the power harness that connect to the battery box, and use a multimeter to measure the diode value as shown in the picture below(Red lead to negative electrode, black lead to positive electrode).
 - c. If the value is approximately equal to $0.7 \pm 0.2V$, you should replace a new battery compartment.
 - a. Otherwise follow the steps.

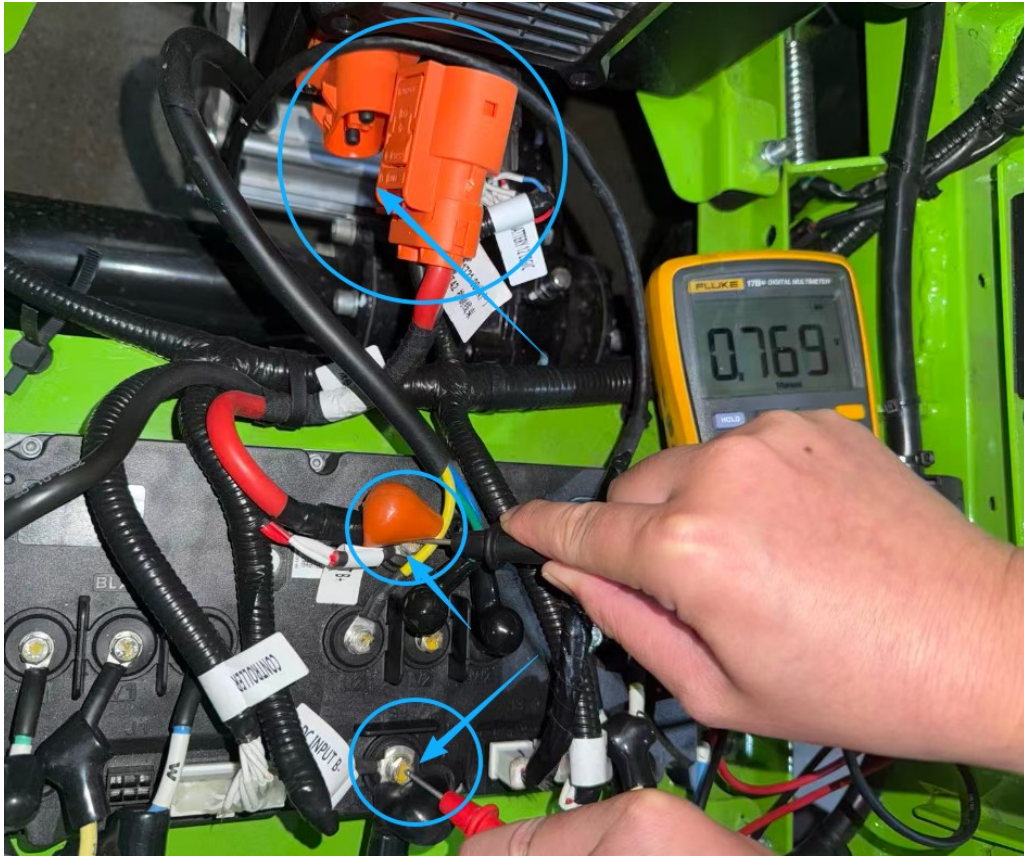

Correct value should be approximately equal to $0.7 \pm 0.2V$

- ③ Disconnect the connectors of DC-DC and use a multimeter to measure the diode value of the controller as the picture showed below (Red lead to negative electrode, black lead to positive electrode).
- If the value is approximately equal to $0.7 \pm 0.2V$, you should replace the DC-DC.
 - Otherwise replace the controller.

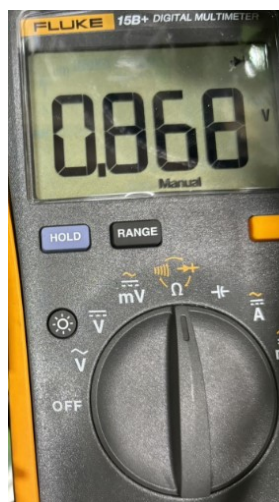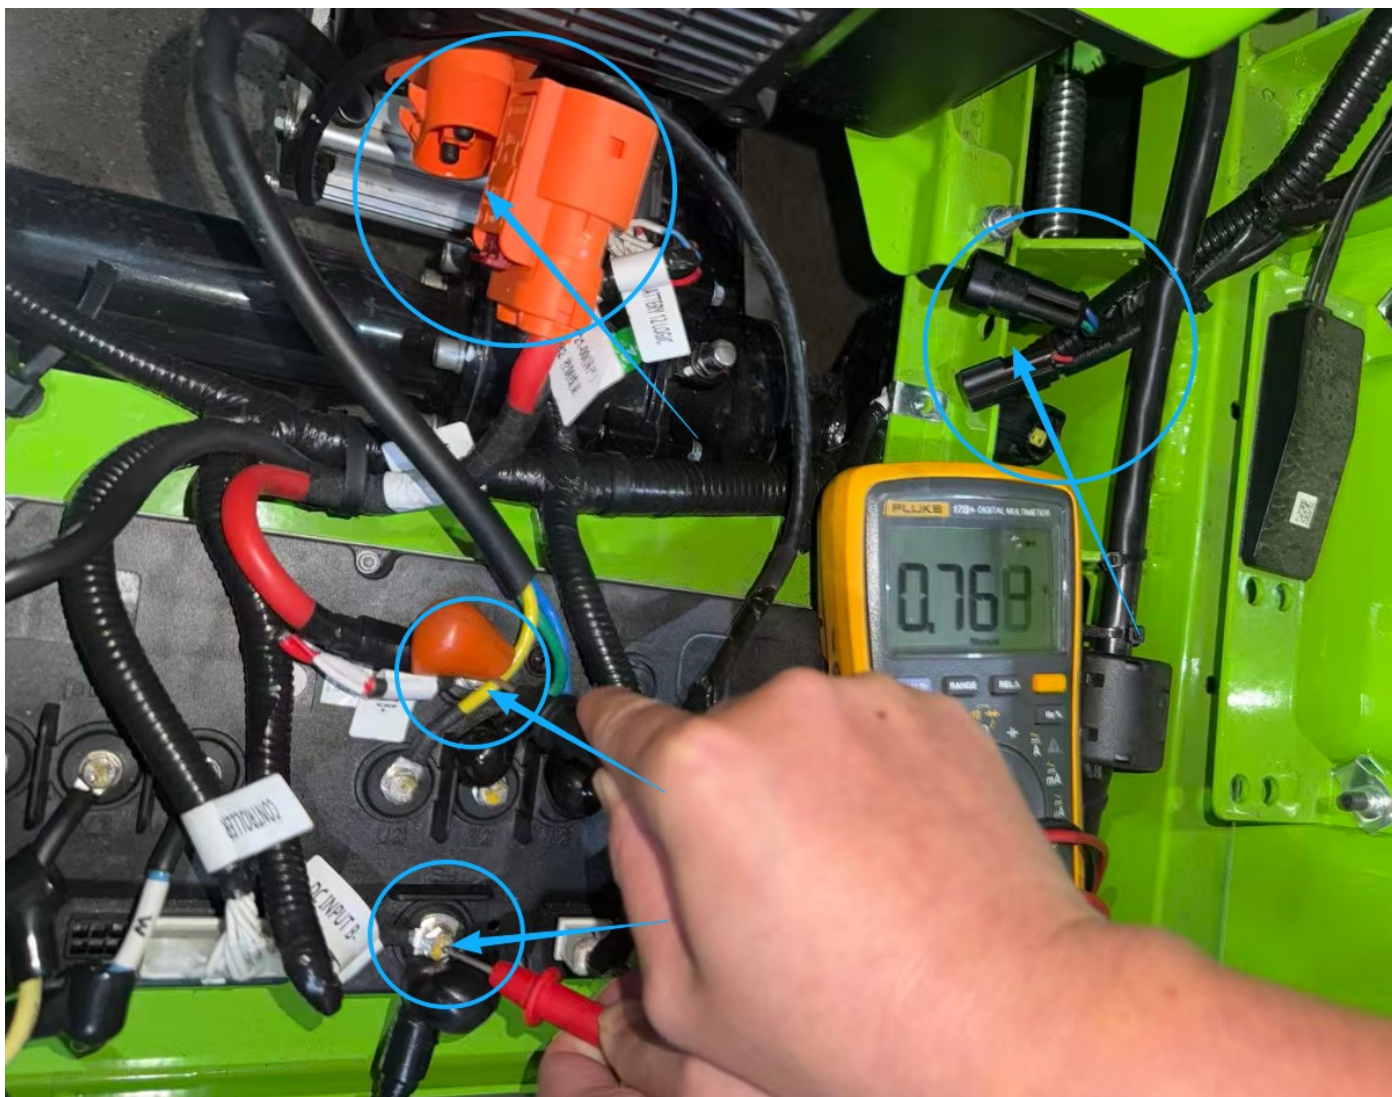

Correct value should be approximately equal to $0.7 \pm 0.2V$

2. Other errors of PMU12

Replace the battery compartment.

PMU13 - PMU no available battery

1. Make sure that the inserted batteries are correct, not mixed with different voltage platform.
2. Replace the battery compartment.

PMU35 - Overtemperature-Level2

Stop the vehicle for a period of time to allow it to cool down, if the fault still have after restarting, replace the battery compartment.

PMU36 - Undervoltage

1. Charge the batteries.
2. Make sure the battery compartment on the correct platform is used.
3. Replace the battery compartment.

PMU37 - Overvoltage

1. Make sure the battery compartment on the correct platform is used.
2. Replace the battery compartment.

PMU38 - Power supply output failure

Disconnect the power harness from battery compartment:

1. If the fault code disappeared, follow the "PMU12" trouble shooting guide to find the detail issue.
2. Otherwise, replace the battery compartment.

PMU41 - No battery pack available

1. Make sure that the inserted batteries are correct, not mixed with different voltage platform.
2. Replace the battery compartment.

PMU46 – Relay (MOS) error

Replace the battery compartment.

PMU47 – Pre-charge error

Follow the “PreCharge Function Error” of PMU12 trouble shooting guide to find the detail issue.

PMU48 – Pre-charge hardware error

Replace the battery compartment.

PMU49 – Negative MOSFET temperature sensor error

Replace the battery compartment.

PMU52 – Current sensor error

Replace the battery compartment.

PMU57 – KSI Pre-MOS error

Replace the battery compartment.

PMU59 – KSI MOS error

Replace the battery compartment.

PMU61 – Battery pack 1 does not match

1. Make sure that the inserted battery in cabin 1 is correct, not mixed with different voltage platform.
2. Replace the battery compartment.

PMU62 – Battery pack 2 does not match

1. Make sure that the inserted battery in cabin 2 is correct, not mixed with different voltage platform.

2. Replace the battery compartment.

PMU63 - Battery pack 3 does not match

1. Make sure that the inserted battery in cabin 3 is correct, not mixed with different voltage platform.
2. Replace the battery compartment.

PMU64 - Battery pack 4 does not match

1. Make sure that the inserted battery in cabin 4 is correct, not mixed with different voltage platform.
2. Replace the battery compartment.

PMU65 - Battery pack 5 does not match

1. Make sure that the inserted battery in cabin 5 is correct, not mixed with different voltage platform.
2. Replace the battery compartment.

PMU66 - Battery pack 6 does not match

1. Make sure that the inserted battery in cabin 6 is correct, not mixed with different voltage platform.
2. Replace the battery compartment.

PMU67 - Abnormal charging status

1. Check if the charger's input plug is properly plugged in.
2. Check if the vehicle can be powered on and worked properly:
 - ① Can't be powered on and worked, then replace the battery compartment.
 - ② Otherwise, replace the charge socket.

T2 - Drive motor stalled

Turn off the power, use a jack to lift the vehicle's rear wheels, disengage the parking brake, try to rotate the rear wheel.

- a. If the wheel can't be rotated, replace the traction motor.
- b. Otherwise, replace the controller.




T4 - Motor overspeed protection

1. Replace the traction motor.
2. Replace the controller.

T5 - Motor encoder error

1. Check the 6 pins encoder sensor connector of traction motor, if any pins are bent, try to fix it, otherwise, replace the traction motor.



2. Check the 6 pins socket of controller(J3), if any pins are bent, try to fix it, otherwise, replace the controller.



3. Replace the traction motor.
4. Replace the controller.

T6 - Controller phase loss

1. Check the phase wires' terminals of traction motor, if broken, try to fix it.
2. Use multimeter to measure the resistance between UVW of the traction phase wires.

① Measure the resistance between UV, the correct value should be around 1Ω , if the value is infinite, that means the wires are broken between UV, need to replace a new traction motor.

② Measure the resistance between UW, the correct value should be around 1Ω , if the value is infinite, that means the wires are broken between UW, need to replace a new traction motor.

③ Measure the resistance between VW, the correct value should be around 1Ω , if the value is infinite, that means the wires are broken between VW, need to replace a new traction motor.

3. Replace the controller.

T7 - MOSFET error

Replace the controller.

T8 - Controller undervoltage

1. Charge the batteries.
2. Make sure the controller on the correct platform is used.
3. Flash the right firmware to the controller. 60V and 80V platform have different firmware.
4. Replace the controller.


T9 - Controller overvoltage

1. Make sure the controller on the correct platform is used.
2. Flash the right firmware to the controller. 60V and 80V platform have different firmware.
3. Replace the controller.

T12 - Motor overtemperature

1. Stop the vehicle for a period of time to allow it to cool down, if the fault still have after restarting, follow the steps below.

① Use multimeter to measure the resistance between PIN1(black) and PIN3(white) of the 6 pins encoder sensor connector of traction motor, the correct value should be $500\sim 1000\Omega$ (depend on the environment temperature). If not, replace the traction motor.



- ② Replace the controller.

T13 - Controller overtemperature

Stop the vehicle for a period of time to allow it to cool down, if the fault still have after restarting, replace the controller.


T14 - Software Overcurrent

Reduce the load, if can't solve when under normal load, try to replace a new controller.

T15 - Hardware Overcurrent

Reduce the load, if can't be solved under normal load, follow the steps below:

1. Check the 6 pins encoder sensor connector of traction motor, if any pins are bent, try to fix it, otherwise, replace the traction motor.



2. Check if all the phase wires' terminals &B+ &B- are tightened, if not, tighten them with a M5 screwdriver.
3. replace a new controller.
4. Replace a new traction motor.

T16 - Potentiometer error

Check: Use "ToolsForCAN" to read the value of potentiometer -

1. If the value is larger than 4.6 or smaller than 0.2, replace the potentiometer.
2. Replace the controller.

3. Replace the control harness.

T19 - Operating sequence error


Check: Use “ToolsForCAN” to identify the status of switches and potentiometer -

Make sure there have no operations before sitting on the seat. The status should meet the table below before operating.

Switch & Controllers		State
Seat Switch		ON
Parking Switch		ON
PTO Switch		OFF
Cruise Button		OFF
Potentionmeter	0.80	0.6~0.95V
Controller		No Fault
PMU		No Fault

T23 - Battery compartment (PMU)communication error


1. Check the pins of connector of the battery compartment side:
 - a. If the pins of the controller are bent or retracted, if can be fixed, try to fix them.
 - b. Replace the battery compartment.

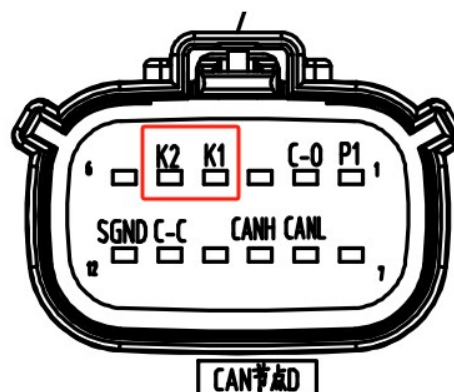

BATTERY 12 LOGIC		
供应商	名称	型号
MOLEX	外壳	334721206
	端子	330122002
	盲堵	343450001


2. Check the pins of the connector of the harness side:
 - a. If the pins of are bent or retracted, if can be fixed, try to fix them.
 - b. Replace the control harness.

供应商	名称	型号
MOLEX	外壳	477259010
	端子	330000002

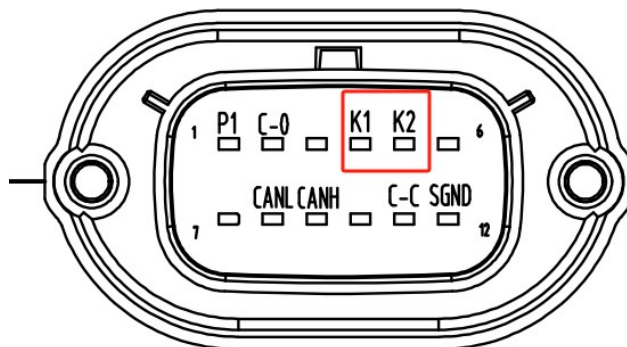

T24 - Battery compartment (PMU) shutdown

1. If you turn off the vehicle, you will get this fault code, it's normal.
2. Otherwise:
 - ① Check if the connector of the key switch is connected well.
 - ② Check the pins of connector of the battery compartment side:
 - a. If the pins of the controller are bent or retracted, if can be fixed, try to fix them.
 - b. Replace the battery compartment.

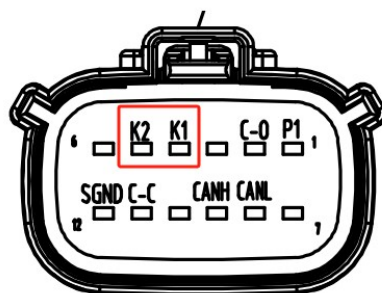


CAN节点

BATTERY 12 LOGIC		
供应商	名称	型号
MOLEX	外壳	334721206
	端子	330122002
	盲堵	343450001

③ Check the pins of the connector of the harness side:

- a. If the pins of are bent or retracted, if can be fixed, try to fix them.
- b. Replace the control harness.

供应商	名称	型号
MOLEX	外壳	477259010
	端子	330000002

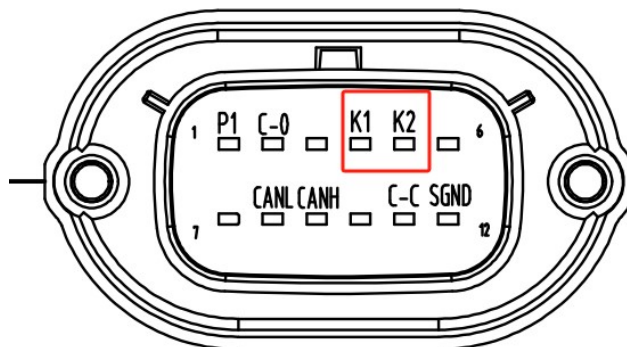

T27 - CAN timeout error - left blade


Flash the firmware for the left blade part first, if can't flash well, replace a new controller.

T29 - CAN timeout error - right blade

Flash the firmware for the right blade part first, if can't flash well, replace a new controller.

T31 - Seat switch verification error

1. Check if the connector of the seat switch is connected well.
2. Check the pins of connector of the controller's side:
 - a. If the pins of the controller are bent or retracted, if can be fixed, try to fix them.
 - b. Replace the controller.
3. Check the pins of the connector of the harness side:
 - a. If the pins of are bent or retracted, if can be fixed, try to fix them.
 - b. Replace the control harness.

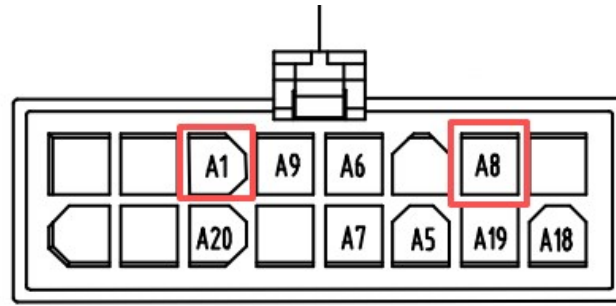

CONTROLLER

供应商	名称	型号
TE	外壳	794824-1
	端子	770904-1
	单线密封	794758-1
	盲堵	794995-1
	接口密封	1-1586362-6

4. Replace the seat switch.

TR32/TL32 - Software authentication error

Replace a new controller.

MR1/ML1 - Motor positioning error

1. MR1

Swap the M5 terminals of left and right blade motors' phase harness(Totally six screws).

- If still have MR1 fault code, replace the controller.
- If fault code change to ML1, you should replace the right blade motor.

2. ML1

Swap the M5 terminals of left and right blade motors' phase harness(Totally six screws).

- If still have ML1 fault code, replace the controller.
- If fault code change to MR1, you should replace the left blade motor.

MR2/ML2 – Blade motor stalled

1. MR2

- ① Turn off the power, try to rotate the right side blade.
 - a. If the blade can't be rotated or very tight , replace the right blade motor.
 - b. Otherwise follow the steps below.
- ② Swap the M5 terminals of left and right blade motors' phase harness(Totally six screws).
 - c. If still have MR2 fault code, replace the controller.
 - d. If fault code change to ML2, you should replace the right blade motor.

2. ML2

- ① Turn off the power, try to rotate the left side blade.
 - a. If the blade can't be rotated or very tight, replace the left blade motor.
 - b. Otherwise follow the steps below.
- ② Swap the M5 terminals of left and right blade motors' phase harness(Totally six screws).
 - c. If still have ML2 fault code, replace the controller.
 - d. If fault code change to MR2, you should replace the left blade motor.

MR3/ML3 – Blade motor low speed

1. MR3

Swap the M5 terminals of left and right blade motors' phase harness(Totally six screws).

- a. If still have MR3 fault code, replace the controller.
- b. If fault code change to ML3, you should replace the right blade motor.

2. ML3

Swap the M5 terminals of left and right blade motors' phase harness(Totally six screws).

- a. If still have ML3 fault code, replace the controller.
- b. If fault code change to MR3, you should replace the left blade motor.

MR4/ML4 – Blade motor over speed

1. MR4

Swap the M5 terminals of left and right blade motors' phase harness(Totally six screws).

- a. If still have MR4 fault code, replace the controller.
 - b. If fault code change to ML4, you should replace the right blade motor.
2. ML4

Swap the M5 terminals of left and right blade motors' phase harness(Totally six screws).

- a. If still have ML4 fault code, replace the controller.
- b. If fault code change to MR4, you should replace the left blade motor.

MR6/ML6 - Controller phase loss

1. MR6

Swap the M5 terminals of left and right blade motors' phase harness(Totally six screws).

- a. If still have MR6 fault code, replace the controller.
- b. If fault code change to ML6, you should replace the right blade motor.

2. ML6

Swap the M5 terminals of left and right blade motors' phase harness(Totally six screws).

- a. If still have ML6 fault code, replace the controller.
- b. If fault code change to MR6, you should replace the left blade motor.

MR7/ML7 - MOSFET error

Replace the controller.

MR8/ML8 - Controller undervoltage

- ① Charge the batteries.
- ② Make sure the controller on the correct platform is used.
- ③ Flash the right firmware to the controller. 60V and 80V platform have different firmware.
- ④ Replace the controller.

MR9/ML9 - Controller overvoltage

- ① Make sure the controller on the correct platform is used.
- ② Flash the right firmware to the controller. 60V and 80V platform have different firmware.

- ③ Replace the controller.

MR13/ML13 – Controller overtemperature

Stop the vehicle for a period of time to allow it to cool down, if the fault still have after restarting, replace the controller.

MR14/ML14 – Software overcurrent

1. MR14

Swap the M5 terminals of left and right blade motors' phase harness(Totally six screws).

- a. If still have MR14 fault code, replace the controller.
- b. If fault code change to ML14, you should replace the right blade motor.

2. ML14

Swap the M5 terminals of left and right blade motors' phase harness(Totally six screws).

- a. If still have ML14 fault code, replace the controller.
- b. If fault code change to MR14, you should replace the left blade motor.

MR15/ML15 – Hardware overcurrent

1. MR15

Swap the M5 terminals of left and right blade motors' phase harness(Totally six screws).

- a. If still have MR15 fault code, replace the controller.
- b. If fault code change to ML15, you should replace the right blade motor.

2. ML15


Swap the M5 terminals of left and right blade motors' phase harness(Totally six screws).

- a. If still have ML15 fault code, replace the controller.
- b. If fault code change to MR15, you should replace the left blade motor.

MR19/ML19 – Operating sequence error

1. Make sure the blade switch is on the "OFF" position, then try to turn on the blade again.
2. Check if the connector of the blade switch is connected well.

3. Check the pins of connector of the controller's side:
 - a. If the pins of the controller are bent or retracted, if can be fixed, try to fix them.
 - b. Replace the controller.
4. Check the pins of the connector of the harness side:
 - a. If the pins of are bent or retracted, if can be fixed, try to fix them.
 - b. Replace the control harness.

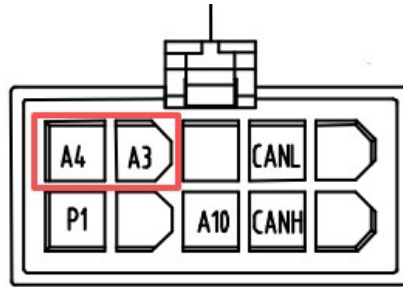

CAN节点D

CONTROLLER

供应商	名称	型号
TE	外壳	794781-1
	端子	770904-1
	单线密封	794758-1
	盲堵	794995-1
	接口密封	1-794772-0

5. Replace the blade switch.

MR25/ML25 - CAN timeout error - left drive

Flash the firmware for the traction part first, if can't flash well, replace a new controller.

MR26/ML26 - CAN timeout error - right drive

Flash the firmware for the traction part first, if can't flash well, replace a new controller.

MR27/ML27 - CAN timeout error - left blade


Flash the firmware for the left blade part first, if can't flash well, replace a new controller.

MR29/ML29 – CAN timeout error – right blade

Flash the firmware for the right blade part first, if can't flash well, replace a new controller.

MR31/ML31 – Blade switch verification error

1. Check if the connector of the blade switch is connected well.
2. Check the pins of connector of the controller's side:
 - a. If the pins of the controller are bent or retracted, if can be fixed, try to fix them.
 - b. Replace the controller.
3. Check the pins of the connector of the harness side:
 - a. If the pins of are bent or retracted, if can be fixed, try to fix them.
 - b. Replace the control harness.

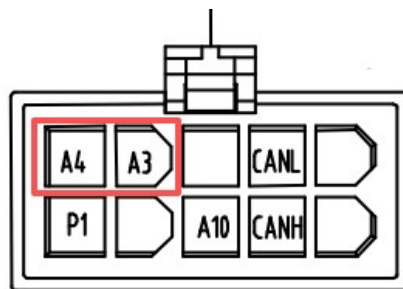

CAN节点
CONTROLLER

供应商	名称	型号
TE	外壳	794781-1
	端子	770904-1
	单线密封	794758-1
	盲堵	794995-1
	接口密封	1-794772-0

4. Replace the blade switch.

MR32/ML32 – Software authentication error


Replace the controller.

MR42/ML42 – Software version verification error


1. Flash the correct firmware for the left and right part of the controller.
2. Replace the controller.

D1-CAN timeout with PMU

- 1. If this fault exists simultaneously with any of D2/D3/D4/D5/D6, follow the steps below.
 - a. Disconnect the connector of display, use a multimeter to measure the resistance from “CANH” and “CANL”, if the value is approximately equal to 60Ω, replace the display.
 - b. Otherwise, the “CANH” and “CANL” of the control harness should be damaged, please replace a new control harness.

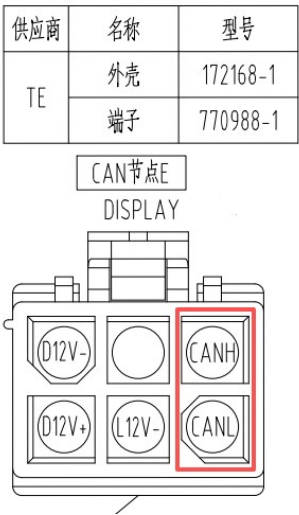

- 2. If this fault exists alone without D2/D3/D4/D5/D6, follow the steps below.
 - a. Disconnect the connector of battery component side, use a multimeter to measure the resistance from “CANH” and “CANL”, if the value is approximately equal to 60Ω, replace the battery component.
 - b. Otherwise, the “CANH” and “CANL” of the control harness should be damaged, please replace a new control harness.

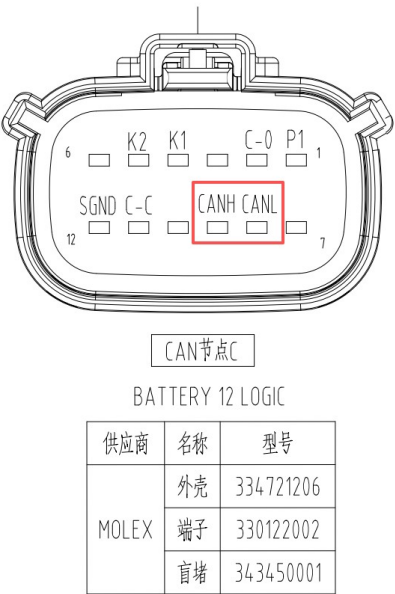


CAN节点C
BATTERY 12 LOGIC


供应商	名称	型号
MOLEX	外壳	334721206
	端子	330122002
	盲堵	343450001

D3-CAN timeout with traction controller

1. If this fault exists simultaneously with D1, follow the steps below.
- a. Disconnect the connector of display, use a multimeter to measure the resistance from “CANH” and “CANL”, if the value is approximately equal to 60Ω, replace the display.
- b. Otherwise, the “CANH” and “CANL” of the control harness should be damaged, please replace a new control harness.

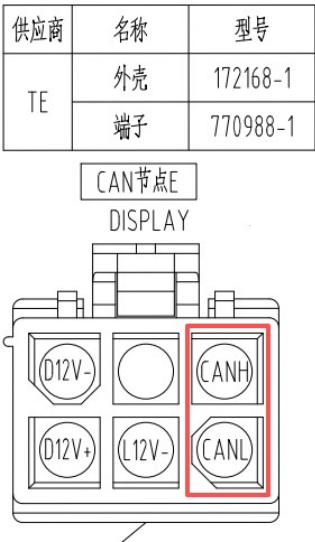

2. If this fault exists without D1, follow the steps below.
- a. Disconnect the connector of controller side, use a multimeter to measure the resistance from “CANH” and “CANL”, if the value is approximately equal to 60Ω, replace the controller.
- b. Otherwise, the “CANH” and “CANL” of the control harness should be damaged, please replace a new control harness.

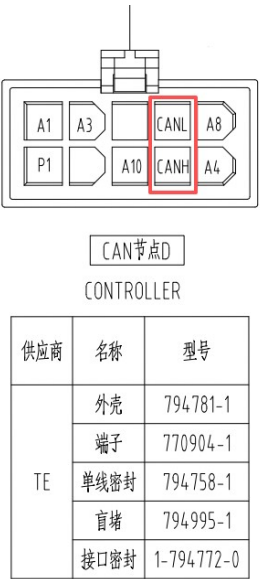


D4-CAN timeout with left blade controller

1. If this fault exists simultaneously with D1, follow the steps below.

a. Disconnect the connector of display, use a multimeter to measure the resistance from “CANH” and “CANL”, if the value is approximately equal to 60Ω, replace the display.


b. Otherwise, the “CANH” and “CANL” of the control harness should be damaged, please replace a new control harness.

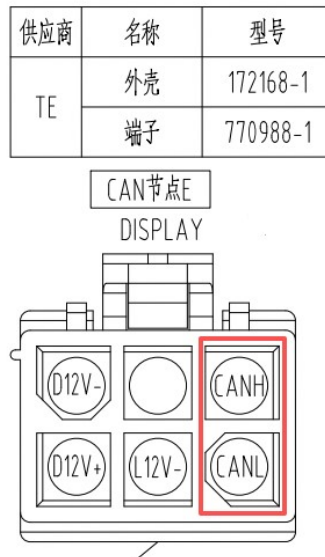

2. If this fault exists without D1, follow the steps below.

a. Disconnect the connector of controller side, use a multimeter to measure the resistance from “CANH” and “CANL”, if the value is approximately equal to 60Ω, replace the controller.

b. Otherwise, the “CANH” and “CANL” of the control harness should be damaged, please replace a new control harness.




供应商	名称	型号
TE	外壳	794781-1
	端子	770904-1
	单线密封	794758-1
	盲堵	794995-1
	接口密封	1-794772-0

D6-CAN timeout with right blade controller

1. If this fault exists simultaneously with D1, follow the steps below.

a. Disconnect the connector of display, use a multimeter to measure the resistance from “CANH” and “CANL”, if the value is approximately equal to 60Ω, replace the display.


b. Otherwise, the “CANH” and “CANL” of the control harness should be damaged, please replace a new control harness.

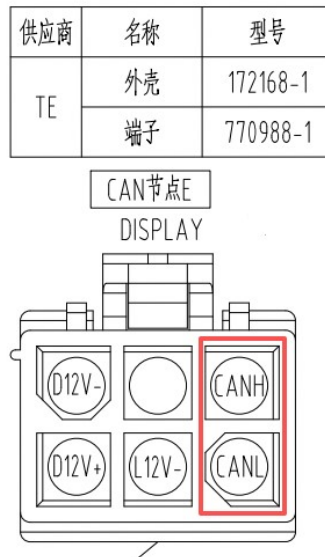

2. If this fault exists without D1, follow the steps below.

a. Disconnect the connector of controller side, use a multimeter to measure the resistance from “CANH” and “CANL”, if the value is approximately equal to 60Ω, replace the controller.

b. Otherwise, the “CANH” and “CANL” of the control harness should be damaged, please replace a new control harness.



供应商	名称	型号
TE	外壳	794781-1
	端子	770904-1
	单线密封	794758-1
	盲堵	794995-1
	接口密封	1-794772-0