

AN ENGINEER'S ACCOUNTS OF QUANTUM COMPUTING DESIGNING A QUANTUM INSPIRED OPTICAL ACCELERATOR

ZOEB IZZI

ABSTRACT. This paper presents a design for an optical quantum emulator that uses coherent, classical lasers to emulate quantum computations. It uses SPDC crystals to generate beams of photons that can (with caution) be treated as qubits and uses gates mounted on motorized platforms to manipulate them, with unary gates being represented by variations on the angle of half-wave plates and quarter-wave plates and binary/multinary gates being represented by a module design that uses a Polarizing Beam Splitter (PBS) to split a target beam, applying the appropriate transformations to one of the beams, and using an AOM to postselect the correct outcomes based on the state of the control beam(s). The design is easily scalable because of its motorized design and, because it uses classical lasers rather than single photon generators, has the potential to be far cheaper than most quantum computers currently.

Date: July 13, 2026.

Key words and phrases. keyword one, keyword two, keyword three, keyword four.

Corresponding author: Zueb Izzi (2027ZIzzi@tjhsst.edu). This work was supported by the higher level math and physics teachers from the TJHSST staff, including Mr. Hannum, Dr. Osborne, Dr. Lynch, and Dr. Smith. I also thank Ms. Kelly for her amazing mentorship as I began my physics journey and for her endless tolerance for my random questions about physics. I, the lead author, declare no conflicts of interest. This research was developed independent of any funding sources, all of which had no input on the design, execution, or interpretation of the research.

CONTENTS

1. Introduction	3
2. The First Design: Bulk-Optics Single-Photon Quantum Computing	4
2.1. Qubit Generation	4
2.2. Optical Gate Manipulation	5
2.3. Engineering Trade-offs and Limitations	6
3. The Second Design: Coherent Laser-Based Quantum Computing	6
3.1. Qubit Generation	7
3.2. Optical Gate Manipulation	7
3.3. Engineering Trade-offs and Limitations	8
4. Discussion	8
4.1. Interpretation of Findings	8
4.2. Limitations	9
4.3. Future Directions	9
5. Conclusion	9


1. INTRODUCTION

Quantum computing has gained significant interest over the past three decades, and rightfully so. From speeding up protein and drug modeling in chemical engineering to revolutionizing modern encryption techniques, quantum computing offers the ability to solve computationally intractable problems. However, one primary issue with quantum computing is the high cost and complexity of hardware. Frequently, quantum computers require hundreds of thousands of dollars per year in upkeep, not to mention specialized engineers to help adjust systems. All of these costs make it drastically more difficult not only for universities, but also large corporations to make the switch from classical operation to quantum operation. Reducing the overhead costs for quantum computers remains an enormous problem that we attempt to solve by making use of a relatively new idea – photonic quantum computing.

Traditional quantum computers rely on using a variety of methods, one of which is to use lasers to “trap” atoms in grids, then applying electric or magnetic fields to them to get them to rotate and change their state. However, this requires not only large amounts of liquid helium to preserve quantum coherence, but, arguably more importantly, each of these evolutions takes time. This drastically increases the amount of time necessary for computations to occur, even though the overall complexity (e.g., $O(\sqrt{n})$ for Grover’s vs. $O(n)$ for traditional search) may be lower. Optical quantum computing is often sidelined because it is difficult to get photons to interact, as is required for CNOT (Controlled-NOT) gates. For this reason, scientists, researchers, and the private sector alike have opted to go a different route. This ignores the possibility of using coherent classical lasers to emulate high-dimensional quantum states via parallel permutations, and using classical post-processing to offset the photon interactions. This paper expands the applicability and ease of light-based quantum computing by presenting designs that will work without absolute zero environmental requirements and, through the nature of classical lasers, have so many states that they can be used to emulate quantum systems with a large number of qubits, even if they cannot be used to perform quantum computations in the traditional sense. Cite prior work like this (?) or as ? when the author is the grammatical subject.

2. THE FIRST DESIGN: BULK-OPTICS SINGLE-PHOTON QUANTUM COMPUTING

The first design serves as our traditional baseline, representing the standard laboratory approach to optical quantum computing. It relies on discrete, macroscopic components arranged on an optical bench to generate, manipulate, and measure individual quantum states. Rather than using a continuous, macroscopic laser beam, this paradigm operates at the fundamental limits of light by isolating single pairs of photons. Note that for the first two designs, we assume that the gates themselves are mounted on motorized platforms that are each controlled by an external computer, so the pipeline of operation would be as follows:

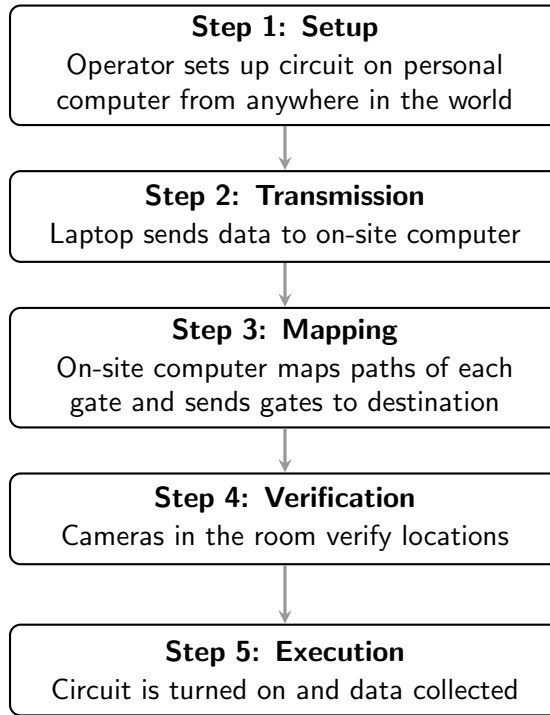

2.1. Qubit Generation. The core of this design is a high-powered pump laser directed into a non-linear Spontaneous Parametric Down-Conversion (SPDC) crystal, such as Beta-Barium Borate (BBO). Within the crystal, a high-energy pump photon splits into a pair of lower-energy, entangled photons, conventionally labeled as the “signal” and “idler.” Because these photons are generated simultaneously, the detection of one photon can herald the presence of the other. Once generated, these single photons are routed into the system to serve as our physical qubits, where the quantum information is encoded within their orthogonal

polarization states, (in this case, horizontal polarization $|H\rangle$ and vertical polarization $|V\rangle$) to represent the state space.

Without loss of generality, we can show a 4-qubit system as follows (using additional SPDC crystals and mirrors to create a larger system as needed):

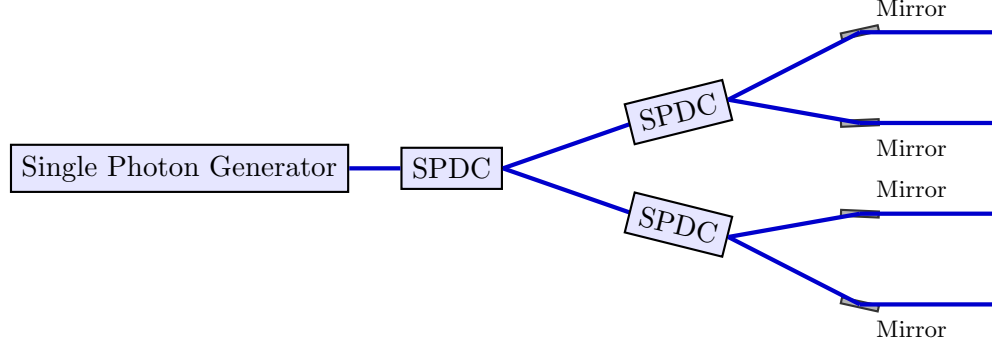


FIGURE 1. Schematic of a 4-qubit single-photon generation system using SPDC crystals. The high-power single photon generator pumps the first SPDC crystal, which generates entangled photon pairs. These photons are then routed into two additional SPDC crystals, each producing further entangled pairs. Mirrors are strategically placed to direct the photons into four parallel output rails, representing four distinct qubits.

2.2. Optical Gate Manipulation. Once initialized, the single photons travel through an open-air array of bulk-optics components designed to perform quantum logic operations:

- **Single-Qubit Rotations:** Polarization states are manipulated using Half-Wave Plates (HWP) and Quarter-Wave Plates (QWP). By physically rotating the axes of these birefringent crystals, we can rotate the photon's polarization state across the Bloch sphere, creating arbitrary superposition states. We map an X rotation to a HWP at 45° , a Z rotation to a HWP at 0° , a Hadamard gate to a HWP at 22.5° , a Y gate to an X gate followed by a QWP at 0° , and an arbitrary θ rotation to a HWP at $\theta/2$.
- **Multi-Qubit Logic:** To perform conditional logic, the photons must interact. In this bulk setup, Controlled-NOT (CNOT) gates are constructed in the following way:

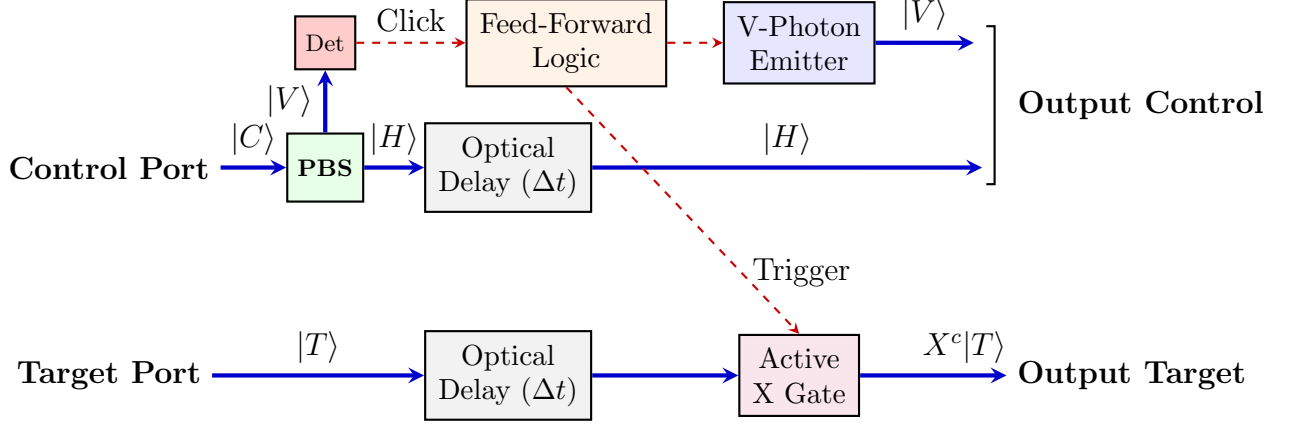



FIGURE 2. Measurement-induced feed-forward CNOT architecture. A control photon’s V component triggers an electro-optic X gate acting on the delayed target rail, while a conditional emitter restores the $|V\rangle$ state to preserve the control qubit’s value.

2.3. Engineering Trade-offs and Limitations. While this bulk-optics SPDC paradigm yields exceptionally high state purity and serves as a highly verified baseline for quantum research, it is not feasible beyond just a handful of qubits. The primary issue is that SPDC is inherently probabilistic with extremely low probability of success; the crystal only splits a photon a tiny fraction of the time. As an algorithm demands more qubits, the probability of generating multiple heralded photon pairs simultaneously scales down exponentially. This makes scaling the architecture physically and financially prohibitive for widespread deployment, which allows for better solutions to manifest.

3. THE SECOND DESIGN: COHERENT LASER-BASED QUANTUM COMPUTING

This design uses coherent lasers to generate a large number of photons that can be manipulated to emulate quantum states. By using a continuous laser source, we can create a high-intensity beam that can be split and routed through various optical elements to perform quantum operations. This approach allows for the generation of many qubits simultaneously, making it more scalable than the SPDC-based design. Further, lasers are far cheaper than single photon generators, which makes this design far cheaper than the first. Note that the setups (e.g. the single-qubit rotation gates, the pipeline of operation, and the motorization of the gate systems) are the same as in the first design.

3.1. Qubit Generation. Using the high powered laser source, we use a variety of Non-Polarizing Beam Splitters (NPBS) to split the laser beam into multiple paths, each representing a qubit. The polarization of the laser light can be manipulated using wave plates to encode quantum information. The initial beam setup, without loss of generality, can be modeled as follows (using additional NPBS and mirrors to create a larger system as needed):

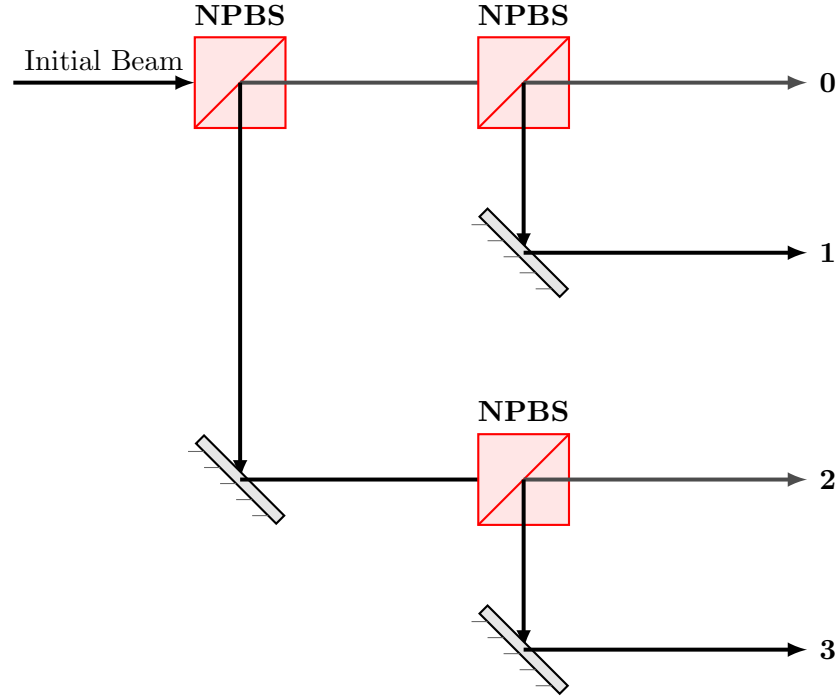

3.2. Optical Gate Manipulation. All of the unary gates (gates that involve only 1 qubit) are identical to those proposed in the first design. This design uses temporal variation to simulate the CNOT effect. By introducing a randomization by which the control qubit and target qubit are outputted probabilistically depending on the relative probabilities of the control qubit, allowing both coherent beams to exist and picking only one to go through, we preserve the "entanglement" effect of the CNOT gate (simulated here by not allowing the target qubit without the X gate to be outputted if the control qubit outputs $|V\rangle$, and vice versa). This design is simple and easy to implement, although it does require more overhead computation from an abstracted computer to deal with interference terms and "simplified" gates (gates that, deterministically, turn a qubit from one state to another, but probabilistically, do not). This design is also more physically intensive, as it requires a lot

of mirrors and beam splitters to ensure that the qubits are outputted in the correct order. We represent it as follows:

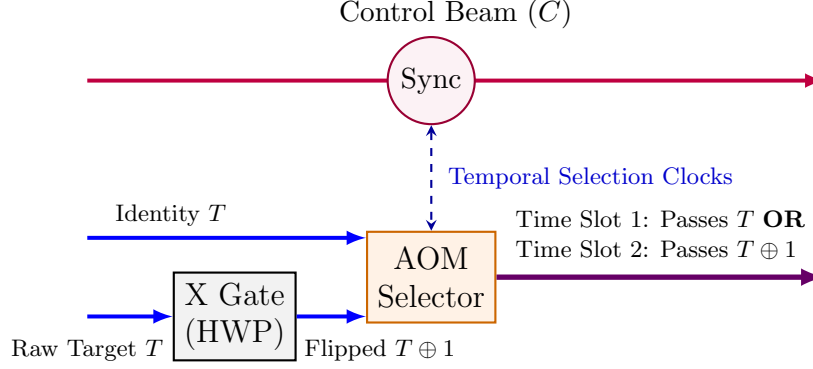


FIGURE 3. Temporal selection routing featuring expanded vertical gap spacing between the control path and the modulated AOM architecture.

3.3. Engineering Trade-offs and Limitations. Considering an AOM of 100 MHz, we can achieve a temporal resolution of 10 ns. This allows for precise control over the timing of the target qubit’s passage through the AOM, ensuring that it is either flipped or passed unchanged based on the control qubit’s state. The temporal selection mechanism effectively simulates the CNOT operation by leveraging the timing of the control and target beams, and while it does require future CNOTs to use more time to set their probabilities, the nanoscale timing allows the overall computation to still be extremely efficient. The main drawback is that this design requires an overhead computer to keep track of the ”simplification” of quantum gates and determine which gates (which can be designated prior to implementation) are able to be simplified, since this technically does not allow for interference terms to cancel out.

4. DISCUSSION

4.1. Interpretation of Findings. Etiam euismod. Fusce facilisis lacinia dui. Suspendisse potenti. In mi erat, cursus id, nonummy sed, ullamcorper eget, sapien. Praesent pretium, magna in eleifend egestas, pede pede pretium lorem, quis consectetur tortor sapien facilisis magna. Mauris quis magna varius nulla scelerisque imperdiet. Aliquam non quam. Aliquam

porttitor quam a lacus. Praesent vel arcu ut tortor cursus volutpat. In vitae pede quis diam bibendum placerat. Fusce elementum convallis neque. Sed dolor orci, scelerisque ac, dapibus nec, ultricies ut, mi. Duis nec dui quis leo sagittis commodo.

4.2. Limitations. Aliquam lectus. Vivamus leo. Quisque ornare tellus ullamcorper nulla. Mauris porttitor pharetra tortor. Sed fringilla justo sed mauris. Mauris tellus. Sed non leo. Nullam elementum, magna in cursus sodales, augue est scelerisque sapien, venenatis congue nulla arcu et pede. Ut suscipit enim vel sapien. Donec congue. Maecenas urna mi, suscipit in, placerat ut, vestibulum ut, massa. Fusce ultrices nulla et nisl.

4.3. Future Directions. ou

Etiam ac leo a risus tristique nonummy. Donec dignissim tincidunt nulla. Vestibulum rhoncus molestie odio. Sed lobortis, justo et pretium lobortis, mauris turpis condimentum augue, nec ultricies nibh arcu pretium enim. Nunc purus neque, placerat id, imperdiet sed, pellentesque nec, nisl. Vestibulum imperdiet neque non sem accumsan laoreet. In hac habitasse platea dictumst. Etiam condimentum facilisis libero. Suspendisse in elit quis nisl aliquam dapibus. Pellentesque auctor sapien. Sed egestas sapien nec lectus. Pellentesque vel dui vel neque bibendum viverra. Aliquam porttitor nisl nec pede. Proin mattis libero vel turpis. Donec rutrum mauris et libero. Proin euismod porta felis. Nam lobortis, metus quis elementum commodo, nunc lectus elementum mauris, eget vulputate ligula tellus eu neque. Vivamus eu dolor.

5. CONCLUSION

Nulla in ipsum. Praesent eros nulla, congue vitae, euismod ut, commodo a, wisi. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Aenean nonummy magna non leo. Sed felis erat, ullamcorper in, dictum non, ultricies ut, lectus. Proin vel arcu a odio lobortis euismod. Vestibulum ante ipsum primis in faucibus orci luctus et ultrices posuere cubilia Curae; Proin ut est. Aliquam odio. Pellentesque massa turpis, cursus eu, euismod nec, tempor congue, nulla. Duis viverra gravida mauris. Cras tincidunt. Curabitur eros ligula, varius ut, pulvinar in, cursus faucibus, augue.

QUANTUM PHYSICS & OPTICS LAB, THOMAS JEFFERSON HIGH SCHOOL FOR SCIENCE & TECHNOLOGY, ALEXANDRIA, VA, USA

Email address: 2027Zizzi@tjhsst.edu