

3-4 Loading Operation

Mode	Disc insertion	Disc loading	Lowering	Play
Sensor	SW3 + SW1 OFF	SW2 + SW OFF	SW2 OFF → ON	SW3 ON
Output	Solenoid ON Loading motor ON (CCW)	Solenoid ON	Solenoid OFF	SW4 ON Loading motor OFF Spindle motor ON
Remarks	The motor assembly and the loading gears rotate. The rubber roller rotates.	Disc moves inward.	Disc is set on the turntable and held by the magnet plate. The deck is released and supported by the suspension system.	The loading is completed.

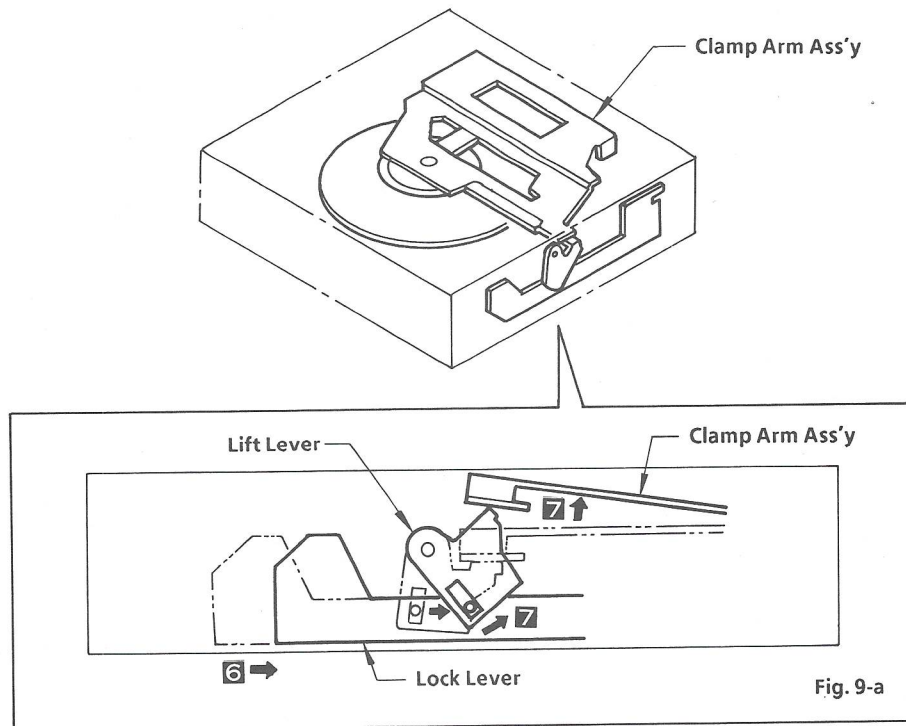


Fig. 9

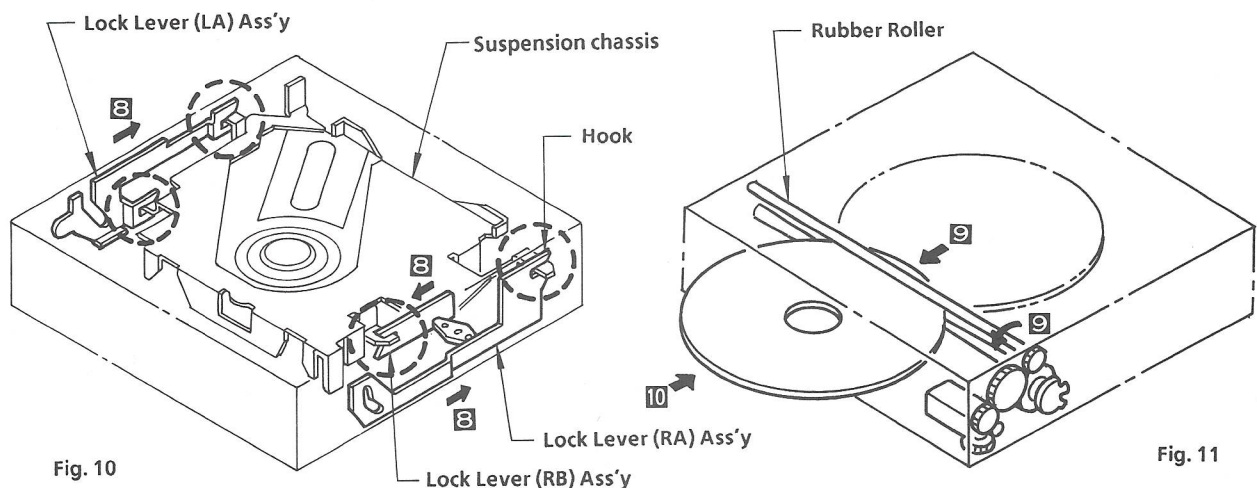


Fig. 10

Fig. 11

- 6 When the feeder arm assembly lifts, the lock lever (RA) assembly slides backward.
- 7 The lift lever rotates counterclockwise and lifts the Clamp Arm assembly.
- 8 When the lock lever (RA) assembly slides, the lock lever (RB) assembly and the lock lever (LA) assembly also slide, and secures the suspension chassis with four hooks.
- 9 With these movements, the disc is grasped by the rubber roller and unloaded from the player. When the disc moves beyond SW2, SW2 turns on, the motor assembly stops rotating, and the ejection is completed.

Reloading

- 10 If the disc is pushed inward from the position at which unloading has finished, the operation of loading begins.

A3-3 Unloading/Reloading Operation

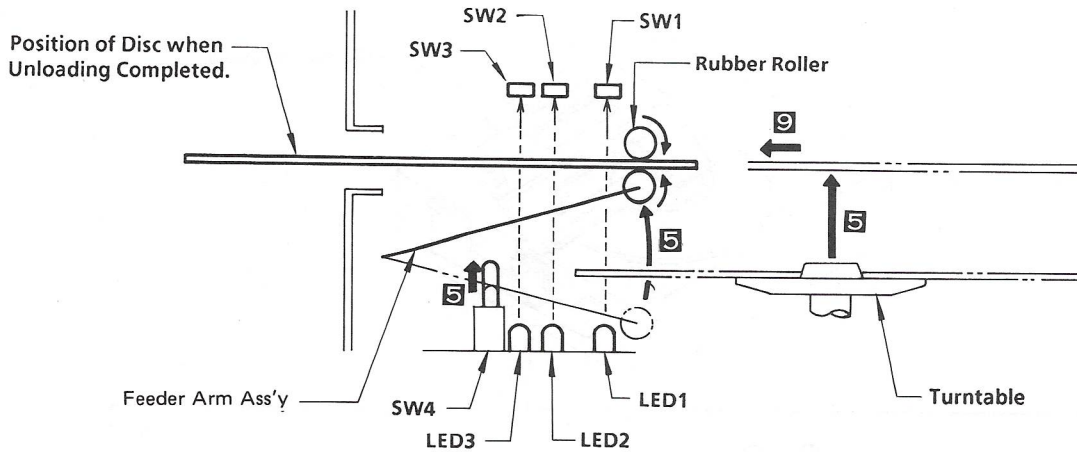


Fig. 7



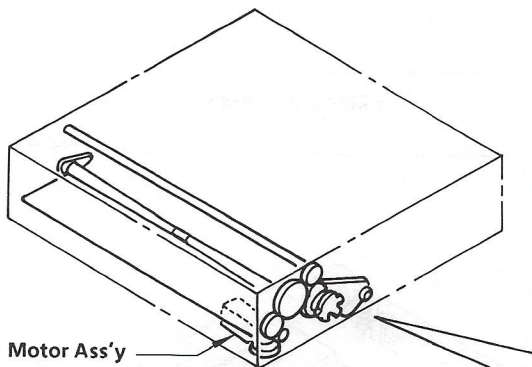


Fig. 8

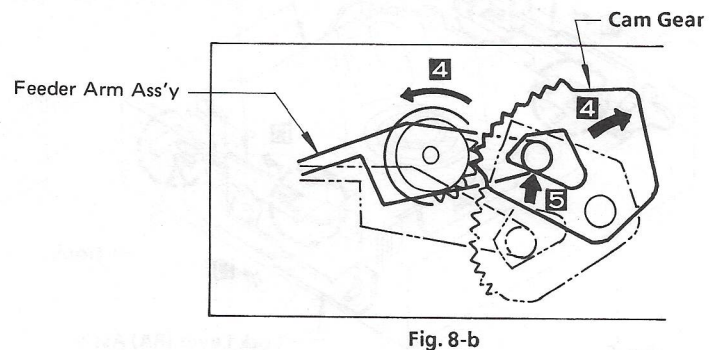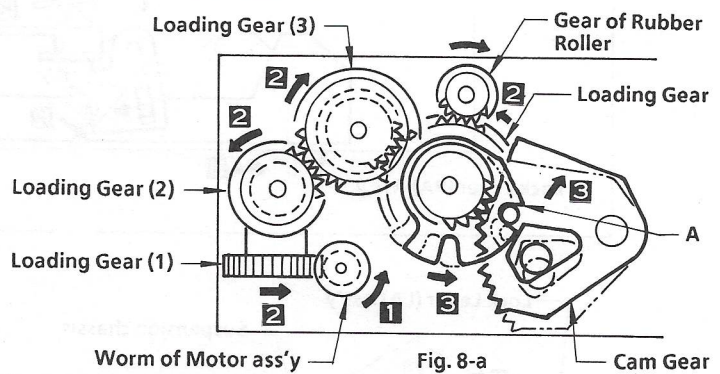

Unloading

- 1 When the eject signal is received, the motor assembly rotates in the direction opposite that of loading.
- 2 The loading gears rotate.
- 3 Part A on the loading gear rotates the cam gear slightly clockwise, then the cam gear and loading gear are engaged.
- 4 The loading gear rotates the cam gear clockwise.
- 5 The cam gear lifts the feeder arm assembly. (SW4 : Off)

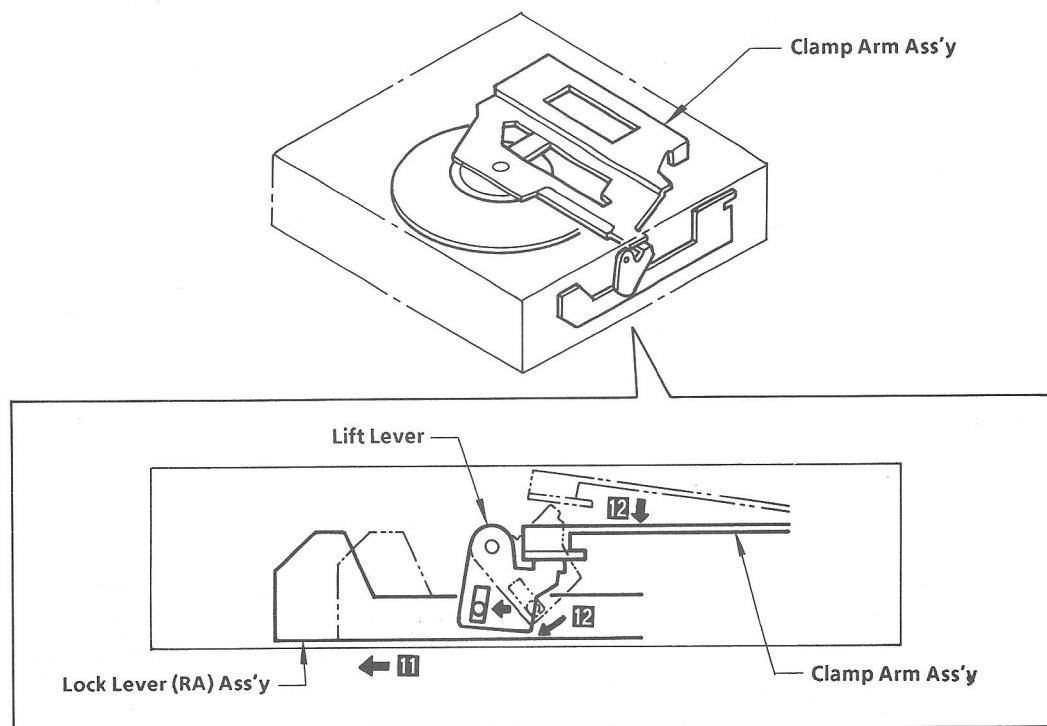


Fig. 4

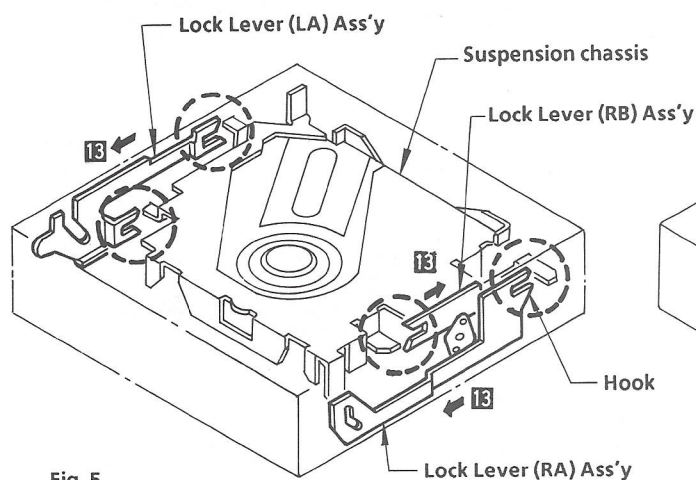


Fig. 5

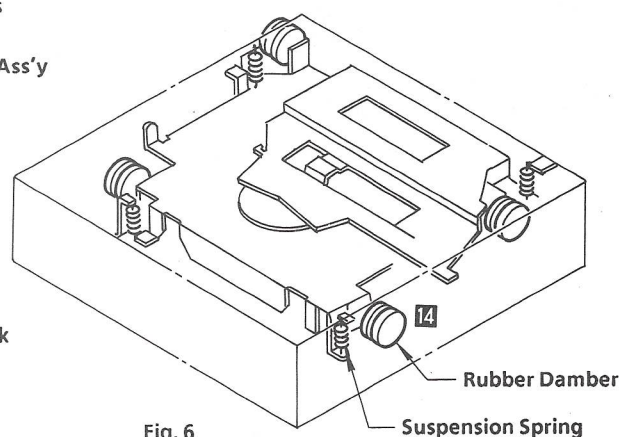


Fig. 6

- 11 When the feeder arm assembly lowers, the lock lever (RA) assembly slides forward.
- 12 The lift lever rotates clockwise and lowers the clamp arm assembly.
The disc is secured in the position for playback by the force of the magnet.
- 13 When the lock lever (RA) assembly slides forward, the lock lever (RB) assembly and the lock lever (LA) assembly also slide, and the secured suspension chassis are released.
- 14 The suspension chassis is then supported by the suspension springs and rubber dampers.