Engineering Applications of Artificial Intelligence

PDE-Agents: An LLM-Orchestrated Multi-Agent Framework for Automated Finite Element Simulations with Knowledge Graph-Augmented Reasoning

--Manuscript Draft--

Manuscript Number:	
Article Type:	Research paper
Keywords:	Large language model agents; Finite Element method; Knowledge graph; GraphRAG; Multi-Agent Systems; Scientific computing automation
Corresponding Author:	Sayan Adhikari, Ph.D. Institute for Energy Technology NORWAY
First Author:	Sayan Adhikari, Ph.D.
Order of Authors:	Sayan Adhikari, Ph.D.
	Gulshan Noorsumar, Ph.D.
	Øyvind Jensen, Ph.D.
Abstract:	We present PDE-Agents, a multi-agent ecosystem that automates the full lifecycle of partial differential equation (PDE) / finite element method (FEM) simulations through natural-language interaction. Three specialist large language model (LLM) agents (Simulation, Analytics, and Database) are orchestrated via a LangGraph supervisor graph, running on locally-deployed open-source LLMs with dual graphics processing units (GPUs) providing approximately 196 GB of video memory. A central novelty is the integration of a graph-based retrieval-augmented generation (GraphRAG) knowledge graph (KG) that enriches agents with curated material properties, known failure patterns, and prior run lineage. We report seven empirical contributions: (i) a verification and validation study confirming second-order spatial convergence for two non-trivial benchmark cases; (ii) a three-way ablation across 50 tasks comparing KG On, KG Off, and KG Smart modes, showing KG Smart achieves 100% success with the highest output quality (physics score 0.933 vs. 0.853, material property fidelity (MPF) 0.926 vs. 0.796); (iii) a novel-material experiment where KG Smart achieves MPF = 1.00 versus 0.34 for the KG-free baseline; (iv) failure analysis tracing KG On's systematic failures to budget exhaustion; (v) an adaptive KG decision framework; (vi) production-scale metrics from 1,369 runs showing 97.8% success and 85.4% first-try rate; and (vii) a 100-task KG growth experiment showing difficulty-dependent quality gains. These results demonstrate that integration pattern, rather than knowledge content, determines whether GraphRAG augmentation helps or hinders an LLM agent, yielding concrete design principles for autonomous FEM simulation assistants.

Cover letter

Institute for Energy Technology (IFE)
Instituttveien 18, 2007 Kjeller, Norway

August 12, 2026

Editorial Office
Engineering Applications of Artificial Intelligence

Dear Editor,

We submit **"Partial Differential Equation Agents (PDE-Agents): A Large Language Model-Orchestrated Multi-Agent Framework for Automated Finite Element Simulations with Knowledge Graph-Augmented Reasoning"** for consideration as an original research article in Engineering Applications of Artificial Intelligence.

The manuscript introduces a framework in which three specialist large language model agents autonomously set up, run, analyse, and iteratively improve finite element simulations from natural-language descriptions. A graph-based retrieval-augmented generation knowledge base (Neo4j, 768-dimensional vector embeddings) grounds agent reasoning in curated material properties, failure patterns, and prior run lineage. We propose a novel *KG Smart* integration strategy and show that *integration pattern*, rather than knowledge content alone, determines whether retrieval augmentation improves agent performance.

The evaluation includes verification and validation confirming $\mathcal{O}(h^2)$ convergence, a three-way ablation across 50 tasks, a novel-material experiment (material property fidelity = 1.00 vs. 0.34 for the baseline), and production metrics from 1,369 runs (97.8% success). All code and data are available at https://github.com/MatPro-IFE/pde-agents.

To our knowledge, no prior work combines multi-agent large language model orchestration with production finite element solvers and graph-based retrieval for engineering simulation automation. The manuscript is original, is not under consideration elsewhere, and all authors have approved its submission.

Sincerely,

Sayan Adhikari
Institute for Energy Technology
(IFE), Kjeller, Norway
sayan.adhikari@ife.no

Declaration of interests

☒The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

☐The authors declare the following financial interests/personal relationships which may be considered as potential competing interests:

Title page with author details

Title Page Template

Title:

Partial Differential Equation Agents (PDE-Agents): A Large Language Model-Orchestrated Multi-Agent Framework for Automated Finite Element Simulations with Knowledge Graph-Augmented Reasoning

Author Information

Author names:

Sayan Adhikari, Gulshan Noorsumar, Øyvind Jensen

Affiliations:

Institute for Energy Technology (IFE), Kjeller, Norway

Corresponding author:

Sayan Adhikari (sayan.adhikari@ife.no)

Graphical Abstract

Click here to access/download;Graphical abstract;graphical_abstract.pdf

Natural Language Input

"Simulate heat transfer in a steel plate at 500 K"

Domain Expert or Researcher

PDE-Agents

Multi-Agent Orchestrator

LangGraph Supervisor Router

SIM	ANA	DB
Simulation Agent	Analytics Agent	Database Agent

Local LLMs: Qwen3-Coder-Next | Llama 4 Scout | 2× RTX PRO 6000

GraphRAG Knowledge Base

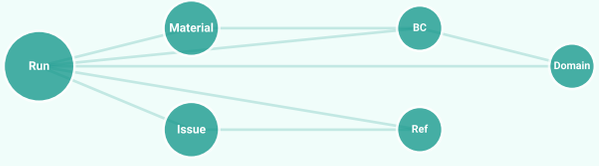

Neo4j · 768-dim embeddings · HNSW vector search · warm-start injection

FEM Simulation Output

$$\rho c_p \frac{\partial u}{\partial t} - \nabla\cdot(k\nabla u) = f$$

DOLFINx / FEniCSx · PETSc KSP · θ-scheme · Gmsh

$\mathcal{O}(h^2)$ verified

100%	97.8%	1.00	2.9×
Task Success	Production SR	MPF Score	KG Advantage
KG Smart · 50 tasks	1,369 real runs	Novel materials	vs. KG-free baseline

Three-Way KG Ablation

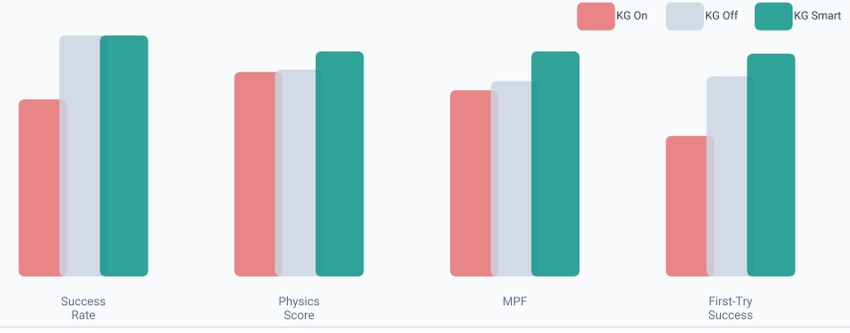

Partial Differential Equation Agents (PDE-Agents): A Large Language Model-Orchestrated Multi-Agent Framework for Automated Finite Element Simulations with Knowledge Graph-Augmented Reasoning

Anonymous[1]

[a][Removed for review],

Abstract

We present *PDE-Agents*, a multi-agent ecosystem that automates the full lifecycle of partial differential equation (PDE) / finite element method (FEM) simulations through natural-language interaction. The system combines three specialist large language model (LLM) agents—Simulation, Analytics, and Database—orchestrated via a LangGraph supervisor graph, with a locally-deployed open-source LLM stack (Qwen3-Coder-Next, Llama 4 Scout) running on dual NVIDIA RTX PRO 6000 Blackwell graphics processing units (GPUs) with approximately 196 gigabytes of combined video memory. The architecture is model-agnostic; we report cross-model validation across two generations of open-source LLMs. A central novelty is the integration of a *graph-based retrieval-augmented generation* (GraphRAG) knowledge base (Neo4j + 768-dimensional vector embeddings) that enriches agents with curated material properties, known failure patterns, and prior run lineage. We report seven empirical contributions: (i) a formal verification and validation (V&V) study confirming second-order spatial convergence ($\mathcal{O}(h^2)$) for two non-trivial benchmark cases and algebraic exactness for the linear case on

the heat equation solver; (ii) a three-way ablation study across 50 benchmark tasks with a frozen knowledge graph (KG), comparing KG On, KG Off, and KG Smart, showing that KG Smart achieves 100% success *and* the highest output quality (physics score 0.933 vs. 0.853 for KG Off, material property fidelity (MPF) 0.926 vs. 0.796), and that our *KG Smart* integration, combining warm-start injection with lazy conditional retrieval, matches KG Off reliability while maximising output fidelity; (iii) a novel-material experiment using three fictional materials whose properties exist only in the KG, where KG Smart achieves near-perfect MPF = 1.00 versus 0.34 for the KG-free baseline; (iv) a failure analysis tracing KG On's 3 systematic failures to budget exhaustion and timeout, establishing warm-start injection as the dominant factor in KG Smart's reliability advantage; (v) an adaptive KG decision framework (Algorithm 1) that selects the optimal retrieval mode per task; (vi) production-scale agent quality metrics from 1,369 real simulation runs showing 97.8% overall success and an 85.4% first-try rate; and (vii) a controlled 100-task KG growth experiment showing that accumulated run history yields a difficulty-dependent quality gain, with hard-task MPF improving by 8.8% between passes while easy and novel tasks remain at ceiling. All code, models, and evaluation artifacts are released openly. Taken together, these results point to *integration pattern*, rather than knowledge content, as what decides whether GraphRAG augmentation helps or hinders an LLM agent, and they yield concrete design principles for autonomous FEM simulation assistants.
Keywords: large language model agents, finite element method, knowledge graph, graph-based retrieval-augmented generation, multi-agent systems, scientific computing automation

---

1. Introduction

Finite element method simulations are central to engineering analysis across structural mechanics, heat transfer, fluid dynamics, and electromagnetics. Yet the gap between a domain expert's intent—"what if I use aluminium instead of steel?"—and a running, verified simulation involves a sequence of error-prone manual steps: geometry creation, boundary condition specification, solver parameter selection, result interpretation, and iterative debugging.

The recent emergence of *reasoning-capable* LLMs [**?** **?** **?**] has opened the possibility of agents that can autonomously traverse this workflow. Prior work on "AI for scientific computing" has largely focused on surrogate modelling [**?** **?** **?**], operator learning [**?**], or dataset-specific fine-tuning [**?**]. Much less attention has been paid to *procedural automation*—using LLMs to *set up and manage* solvers rather than to replace them.

Meanwhile, the *retrieval-augmented generation* (RAG) paradigm [**?**] has demonstrated that grounding LLM outputs with authoritative external knowledge dramatically reduces hallucination. The graph-structured variant, GraphRAG [**?**], further enables multi-hop reasoning over relational knowledge—particularly relevant in engineering contexts where material properties, mesh requirements, and solver stability rules form a rich, interconnected knowledge base.

In this paper we make the following contributions:

1. We design and implement *PDE-Agents*, a complete, containerised multi-agent ecosystem for automated FEM simulation (**??**).
2. We describe a novel *GraphRAG integration pattern* that encodes material properties, known failure modes, and prior run lineage as a Neo4j

knowledge graph with Hierarchical Navigable Small World (HNSW) vector-indexed embeddings [**?**] (**??**).

3. We conduct a rigorous V&V study that confirms $\mathcal{O}(h^2)$ spatial convergence for two non-trivial benchmark cases (transient Fourier and steady Poisson) and algebraic exactness for the linear profile case, validating the numerical kernel against analytical solutions (**??**).
4. We run a three-way ablation study (KG On, KG Off, KG Smart) over 50 tasks with a frozen knowledge graph. KG-enabled modes produce higher-quality simulation outputs (physics score, material property fidelity) than the KG-free baseline, and *KG Smart* reaches 100% success *and* the highest output quality (**??**).
5. We introduce a *novel-material experiment* using three fictional materials absent from any LLM training corpus. KG Smart attains $\approx 2.9\times$ the material property fidelity of the KG-free baseline, which fabricates physically incorrect properties (**??**).
6. We trace KG On's 3 systematic failures to budget exhaustion and timeout, revealing that warm-start injection, not lazy retrieval, is the dominant factor in KG Smart's reliability advantage (**??**).
7. We report production-scale agent quality metrics derived from 1,369 real simulation runs, together with a controlled 100-task KG growth experiment in which the quality gain proves difficulty-dependent: hard-task MPF improves by 8.8% as the KG accumulates run history (**??**).

2. Related Work

LLM agents for scientific computing.. ChemCrow [**?**] demonstrated that equipping an LLM with chemistry tools (RDKit, reaction planners) enables autonomous laboratory-scale reasoning. SciAgent [**?**] and similar systems extend this to broader scientific question answering. Our work targets *numerical simulation* rather than knowledge retrieval, requiring tool-call pipelines that produce and verify deterministic numerical outputs.

Autonomous FEM systems.. FEniCS [**?**] and its successor DOLFINx/FEniCSx [**?**] provide Python-scriptable FEM solvers that are amenable to LLM-driven automation. Early work on "simulation copilots" [**?** **?**] shows that LLMs can generate solver scripts from natural language with moderate success, but these approaches are single-turn and lack closed-loop debugging. More recently, ALL-FEM [**?**] fine-tunes LLMs on 1,000+ verified FEniCS scripts and embeds them in a multi-agent workflow achieving 71.8% code-level success on multiphysics benchmarks, and FEABench [**?**] provides a systematic evaluation using COMSOL Multiphysics (88% executable API calls). PDE-Agents differs by using unmodified open-source LLMs with knowledge-graph augmentation rather than domain-specific fine-tuning, and by providing a controlled ablation of retrieval strategies with physics-aware quality metrics.

Multi-agent orchestration.. LangGraph [**?**] implements graph-structured agent workflows that support conditional routing and persistent state, enabling the supervisor pattern we adopt. AutoGen [**?**] and CrewAI [**?**] offer related frameworks; we choose LangGraph for its explicit state graph semantics and

tight LangChain integration.

Retrieval-augmented generation for engineering.. RAG [**?**] has been applied to engineering documentation retrieval [**?**], code generation [**?**], and more recently to simulation parameter suggestion [**?**]. GraphRAG [**?**] adds structured relational traversal. Corrective RAG (CRAG) [**?**] introduces adaptive retrieval decisions based on document relevance scoring, and AriGraph [**?**] demonstrates episodic knowledge-graph memory for LLM agents. Our *KG Smart* pattern draws on both: warm-start injection from similar past runs (episodic memory) with lazy conditional tool invocation (corrective retrieval). To our knowledge, ours is the first system to combine GraphRAG with a live, iterative FEM simulation loop.

Knowledge graphs for materials science.. Materials-focused knowledge graphs (e.g. MatKG [**?**], OPTIMADE [**?**]) encode material properties in RDF/OWL formats. Buehler [**?**] demonstrates that retrieval-augmented ontological KG strategies outperform flat RAG for materials design by capturing mechanistic relationships between concepts. Our Neo4j KG is lighter-weight and purpose-built for run-time agent queries, prioritising latency over completeness.

3. System Architecture

3.1. Design Philosophy

PDE-Agents adopts four guiding principles:

1. **Open and local:** All models run locally via Ollama on dual NVIDIA RTX PRO 6000 Blackwell GPUs (≈196 GB VRAM, CUDA 13.1), eliminating API costs and data-privacy concerns.

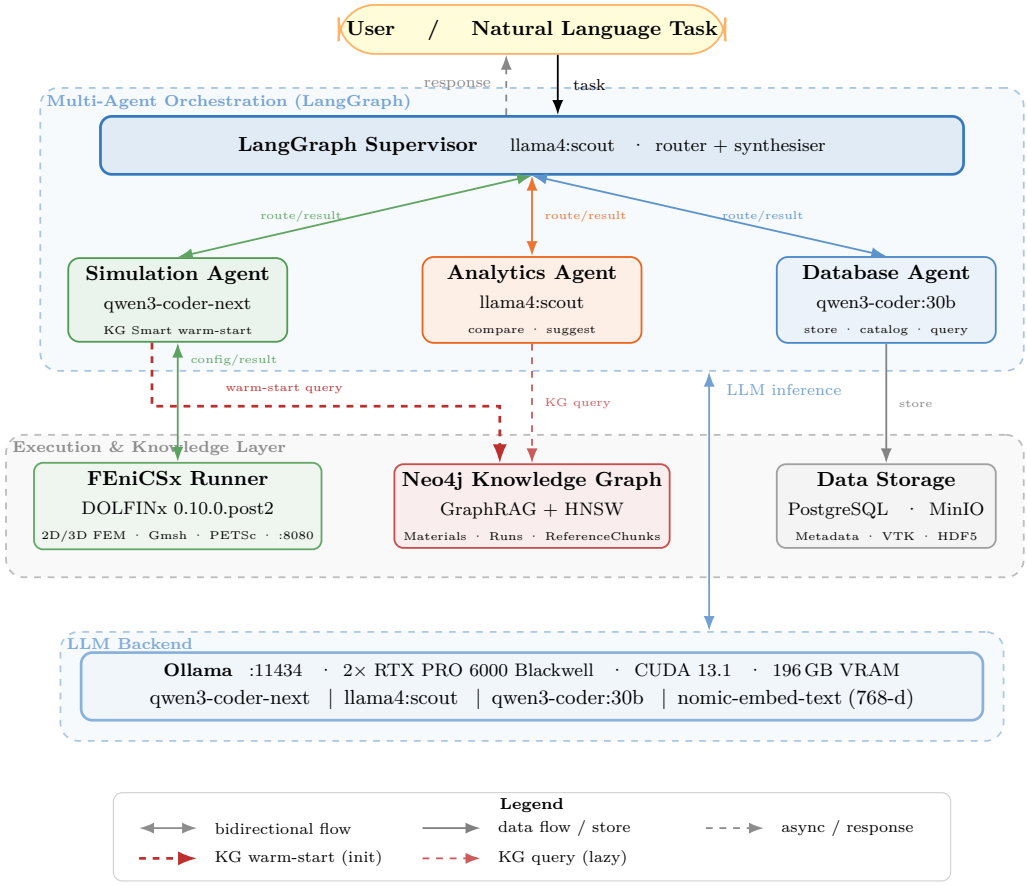

Figure 1: System architecture of PDE-Agents (four-tier layout). *Tier 1*: user natural-language interface. *Tier 2*: Multi-Agent Orchestration — a LangGraph Supervisor routes tasks to three specialist agents (Simulation, Analytics, Database), each backed by a locally-deployed LLM via Ollama. *Tier 3*: Execution & Knowledge — FEniCSx FEM runner (DOLFINx 0.10.0.post2), Neo4j GraphRAG Knowledge Graph (HNSW-indexed 768-d embeddings), and persistent storage (PostgreSQL + MinIO). *Tier 4*: shared Ollama LLM Backend (196 GB VRAM, CUDA 13.1). The thick dashed red arrow (Simulation Agent → Neo4j) represents the *KG Smart warm-start*: the top-3 similar past runs are retrieved via HNSW vector search and injected into the agent's prompt before the reasoning loop. The thin dashed red arrow (Analytics Agent → Neo4j) is the standard lazy KG query path. The blue bidirectional arrow at right carries LLM inference traffic between the orchestration layer and the shared Ollama backend.

2. **Verifiable:** Every agent reasoning step, tool call, and result is logged to a relational database, enabling post-hoc audit.
3. **Containerised:** All 10 services are orchestrated via Docker Compose, ensuring reproducible deployment.
4. **Separation of concerns:** The FEM solver, LLM stack, knowledge graph, and persistence layer are decoupled services communicating over a private bridge network.

3.2. Agent Stack

Each agent's LLM backend is configurable via environment variables, enabling drop-in model upgrades without code changes. **??** lists the default models and the alternatives validated in the cross-model experiments of **??**.

Table 1: Agent model configuration. Current defaults reflect the model upgrade from the initial (v1) deployment. The ablation study uses a frozen KG snapshot across 50 benchmark tasks per mode.

Agent	Env Variable	Default (current)	Previous (v1)
Orch.	`ORCHESTRATOR_MODEL`	`llama4:scout`	`llama3.3:70b`
Sim.	`SIM._AGENT_MODEL`	`qwen3-coder-next`	`qwen2.5-coder:32b`
Anal.	`ANAL._AGENT_MODEL`	`llama4:scout`	`llama3.3:70b`
DB	`DB_AGENT_MODEL`	`qwen3-coder:30b`	`qwen2.5-coder:14b`

Orchestrator.. A LangGraph `StateGraph` supervisor receives the user's natural-language request and routes it to one of three specialist agents via structured JSON decisions. After each agent reports its result the supervisor either routes to another agent or synthesises a final response.

Simulation Agent.. The core reasoning agent, executing a ReAct loop [**?**] with up to 25 reasoning steps and nine tools: `check_config_warnings`, `query_knowledge_graph`, `validate_config`, `run_simulation`, `modify_config`, `debug_simulation`, `list_recent_runs`, `get_run_status`, `run_parametric_sweep`.

Analytics Agent.. Max 12 iterations; tools for statistical comparison across runs, sensitivity analysis, and LLM-generated textual summaries.

Database Agent.. Max 10 iterations; answers history queries against PostgreSQL, cataloguing results and tracing run lineage.

3.3. Tool-Call Compatibility

Supporting multiple LLM families requires robust tool-call parsing, as models encode tool invocations differently. The Qwen 2.5-Coder family emits tool calls as JSON text in the `content` field rather than in the structured `tool_calls` field expected by LangChain's `ToolNode`. We implement a four-pass normalisation procedure in `BaseAgent._parse_content_tool_call`: (1) attempt `json.loads` on the full content; (2) extract from markdown fences; (3) extract the first `{...}` block; (4) repair truncated JSON via progressive bracket-closing and regex fallback.

A separate compatibility issue emerged with Qwen3-Coder-Next: the model occasionally *double-encodes* JSON tool arguments (e.g. `"{\"key\": \"val\"}"`). All tool functions now use a `_safe_json_parse` helper that detects and recursively unwraps such double-encoded strings, so the same tool code works across model families without model-specific workarounds. Llama 4 Scout, by contrast, uses the standard `tool_calls` field natively and requires no special parsing.

3.4. FEM Solver: DOLFINx Heat Equation

The FEniCSx runner container (DOLFINx 0.10.0.post2) exposes a FastAPI endpoint that accepts a `HeatConfig` JSON and returns a result including run metadata. The solver uses P1 (linear Lagrange) elements, with Backward Euler ($\theta = 1$, unconditionally stable) as the default time integration scheme, supporting Dirichlet, Neumann, and Robin boundary conditions. Geometry is built with Gmsh [**?**] for 2D and 3D domains from a library of nine parameterised types: `rectangle`, `l_shape`, `circle`, `annulus`, `hollow_rectangle`, `t_shape`, `stepped_notch`, `box`, and `cylinder`; Gmsh geometries use named physical groups for boundary identification, enabling arbitrary complex domain topologies.

4. Knowledge Graph Architecture

The Neo4j knowledge graph [**?**] (Neo4j 5 Community Edition) serves three functions:

1. **Material property lookup.** A curated library of materials (metals, ceramics, polymers) with thermal conductivity k, density ρ, and specific heat c_p ranges, sourced from engineering handbooks and validated against ASM International data. Approximate values: steel $k \approx 50\,\mathrm{W/mK}$, copper $k \approx 385\,\mathrm{W/mK}$, aluminium $k \approx 205\,\mathrm{W/mK}$.
2. **Failure pattern catalogue.** `KnownIssue` nodes encode failure modes observed during system operation. A pure-Python rule engine (`rules.py`) fires nine pre-run checks analytically before each simulation:

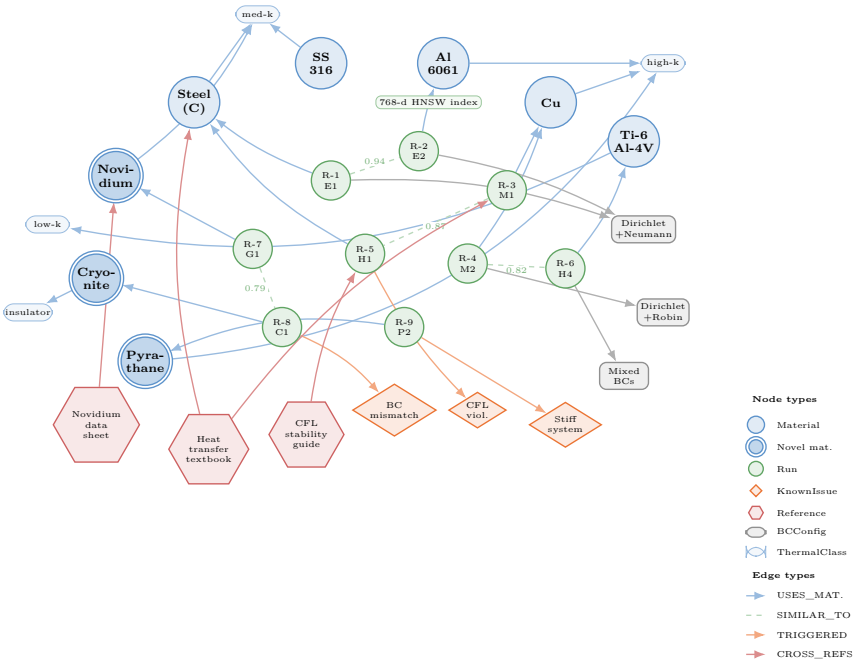

Figure 2: Knowledge graph visualisation (Neo4j-style). **Blue circles**: material nodes (double border = novel/fictional materials known only to the KG). **Green circles**: simulation run nodes linked to their materials via Uses_Material edges and to each other via dashed Similar_To edges (cosine similarity on 768-d HNSW embeddings; scores shown on edges). **Orange diamonds**: known-issue nodes triggered by failed runs. **Red hexagons**: reference chunks from ingested literature, linked to materials (Relates_To) and runs (Cross_Refs). **Grey boxes**: boundary-condition pattern nodes. Pill-shaped nodes show the thermal-class taxonomy.

Rule code	Trigger
`INCONSISTENT_IC`	$\lvert u_{\text{init}} - T_{\text{BC,min}} \rvert > 100\,\text{K}$
`EXPLICIT_CFL_VIOLATION`	$\theta < 0.5$ and $\Delta t > h^2/(2\alpha)$
`NEAR_EXPLICIT_SCHEME`	$0 \leq \theta < 0.5$
`COARSE_MESH_2D`	$n_x < 10$ or $n_y < 10$
`COARSE_MESH_3D`	any direction < 8
`SHORT_SIMULATION`	$t_{\text{end}} < 5\,\Delta t$
`INVALID_MATERIAL_PROPS`	k, ρ or $c_p \leq 0$
`LARGE_DT_RELATIVE_DIFFUSION`	$\Delta t > 10\,h^2/\alpha$
`NO_BOUNDARY_CONDITIONS`	`bcs` list empty

3. **Run lineage and semantic retrieval.** Each completed `Run` node is embedded with `nomic-embed-text` [**?**] (768 dimensions) and indexed in an HNSW vector index [**?**]. Up to k=5 `SIMILAR_TO` edges are created to the nearest neighbours with cosine similarity ≥ 0.85, precomputing the neighbourhood graph for fast agent traversal. The Simulation Agent can query "find similar past runs" to retrieve configurations with known outcomes, enabling few-shot in-context learning from the system's own history.

Document intelligence pipeline.. A Celery-backed ingestion pipeline processes PDF papers, standards documents, and HTML references using Docling [**?**] for structured extraction, splitting them into `ReferenceChunk` nodes with context-aware 256-token windows (overlap 32 tokens) and HNSW-indexed embeddings. Each chunk is automatically cross-referenced to semantically similar `Run` nodes via `CROSS_REFS` edges (cosine ≥ 0.78), bridging literature

knowledge to simulation history. As a representative scale point: indexing the 50-page FEniCSx tutorial produced 298 chunks and 1,073 cross-references.

5. Verification and Validation

We conduct a formal V&V study following ASME V&V 10-2006 guidelines [**?**], comparing the DOLFINx FEM solver against closed-form analytical solutions on three benchmark cases.

5.1. Benchmark Cases

Case 1: 2D Steady-State Linear Profile.. Laplace equation on $\Omega = [0, 1]^2$ with Dirichlet conditions $T|_{x=0} = 0$, $T|_{x=1} = 1$ and Neumann zero-flux on top/bottom. Analytical solution: $T(x, y) = x$. P1 elements are nodally exact for linear solutions; we use UFL spatial-coordinate expressions in high-order quadrature (degree 8) to measure the true continuous L^2 error.

Case 2: 2D Transient Fourier Mode Decay.. Heat equation $\partial_t T = \alpha \nabla^2 T$ with homogeneous Dirichlet on all boundaries and initial condition $T_0 = \sin(\pi x) \sin(\pi y)$. Analytical solution: $T(x, y, t) = e^{-2\alpha\pi^2 t} \sin(\pi x) \sin(\pi y)$.

Case 3: 2D Steady-State Poisson with Constant Source.. $-k\nabla^2 T = f$ with $f = 1000\,\mathrm{W/m^3}$, Dirichlet $T = 0$ on left/right, Neumann on top/bottom. Exact solution: $T(x) = f(x - x^2)/(2k)$.

5.2. Convergence Study Protocol

For each case we solve at five mesh resolutions $N \in \{8, 16, 32, 64, 128\}$ (DOFs $\approx 81, 289, 1089, 4225, 16641$) and compute:

$$\|e\|_{L^2} = \left(\int_\Omega (u_h - u_{\text{exact}})^2 \, \mathrm{d}x \right)^{1/2} \tag{1}$$

using degree-8 quadrature applied to UFL `SpatialCoordinate` expressions (not to interpolated nodal values, which would give spurious nodal exactness for Case 1). The convergence rate is estimated by linear regression on the log-log plot.

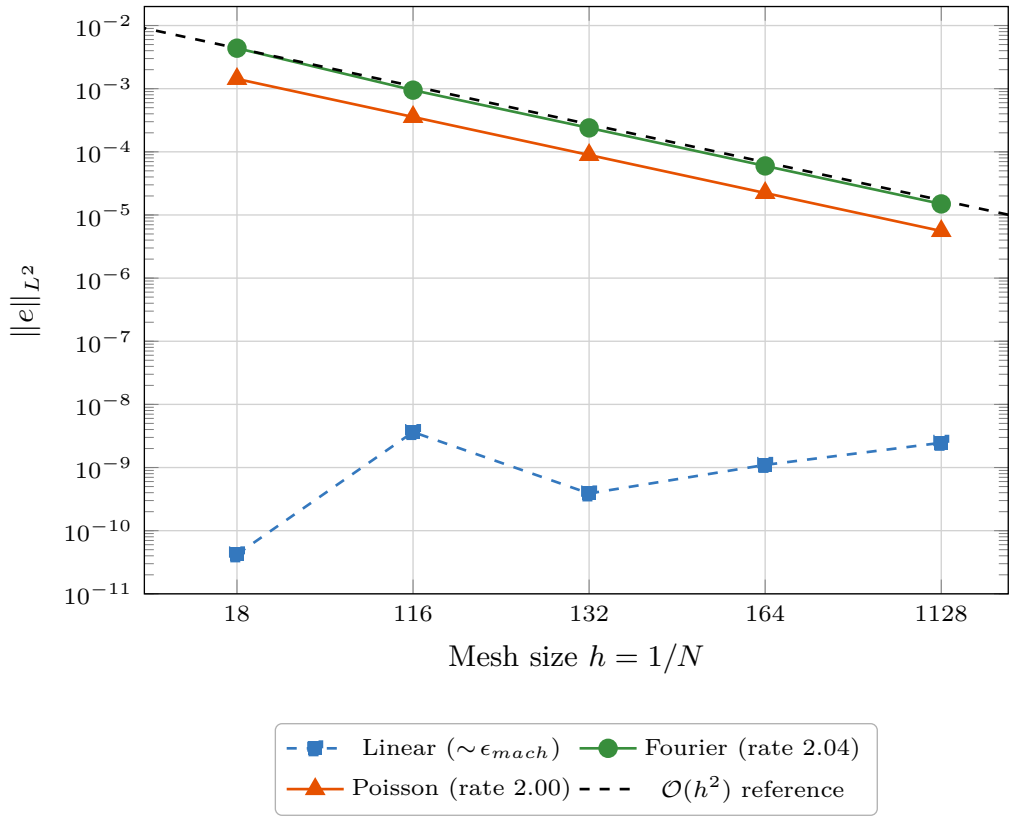

Figure 3: Spatial convergence study. Cases 2 and 3 exhibit the expected $\mathcal{O}(h^2)$ rate for P1 elements. Case 1 is algebraically exact (linear profile is represented exactly in the P1 space), with $\|e\|_{L^2} \approx \mathcal{O}(10^{-9})$ attributable only to floating-point rounding.

5.3. Results

All three cases pass: Cases 2 and 3 achieve rates of 2.04 and 2.00, consistent with the theoretical $\mathcal{O}(h^2)$ prediction for P1 finite elements on uniform

Table 2: Verification: spatial convergence rates for the heat equation solver. Expected rate is $\mathcal{O}(h^2)$ for P_1 elements.

Case	Description	DOFs	$\|e\|_{L^2}$	Rate
Steady Linear	Linear $T(x,y)=x$; exact in P_1 space	16 641	2.47×10^{-9}	*exact*
Transient Fourier	$e^{-2\pi^2 t}\sin(\pi x)\sin(\pi y)$ decay mode	16 641	1.50×10^{-5}	2.04
Steady Poisson	$-\nabla^2 u = 1$; closed-form polynomial soln.	16 641	5.57×10^{-6}	2.00

Cartesian meshes. Case 1 achieves machine-precision errors (order 10^{-9}) because the linear profile lies exactly in the P1 polynomial space, confirming correct solver implementation.

5.4. Representative Simulation Gallery

Beyond numerical convergence, a practical simulation assistant needs breadth: it must handle diverse materials, boundary condition types, domain geometries, time dependence, and dimensionality. Figure **??** presents six representative heat-transfer problems, each solved end-to-end by the Simulation Agent from a single natural-language prompt. No manual intervention was required for mesh generation, solver configuration, boundary condition application, or post-processing. All cases use P1 Lagrange elements on triangular (2D) or tetrahedral (3D) meshes, solved by DOLFINx 0.10.0.post2. Temperature fields are reported in Kelvin throughout for consistency.

Materials.. The gallery covers five engineering metals whose thermal conductivities span two orders of magnitude: copper ($k = 385\,\mathrm{W/(m{\cdot}K)}$, panel a), AISI 1010 steel ($k = 50\,\mathrm{W/(m{\cdot}K)}$, panel b), aluminium 6061 ($k = 205\,\mathrm{W/(m{\cdot}K)}$, panels d and e), Ti-6Al-4V titanium ($k = 6.7\,\mathrm{W/(m{\cdot}K)}$, panel c), and stainless steel 304 ($k = 16.3\,\mathrm{W/(m{\cdot}K)}$, panel f). In a production deployment, the agent retrieves these values from the Neo4j knowledge graph via `query_knowledge_graph`.

Boundary conditions.. Panel (a) applies the simplest configuration: Dirichlet conditions on opposing faces ($T = 373.15\,\mathrm{K}$ left, $T = 273.15\,\mathrm{K}$ right), producing the expected linear gradient. Panel (b) combines all four major BC types on a single domain: Dirichlet (300 K, left), Neumann inward flux ($2\,\mathrm{kW/m^2}$, top), Robin convection ($h = 25\,\mathrm{W/(m^2{\cdot}K)}$, $T_\infty = 293\,\mathrm{K}$, right), and insulated (bottom), together with volumetric heating $Q = 5\,\mathrm{kW/m^3}$, creating the asymmetric field visible in the plot. Panel (c) uses Dirichlet BCs on opposing edges (573 K left, 293 K right) with the insulated hole boundary distorting the field into characteristic thermal concentration bands. Panel (f) combines Dirichlet (300 K bottom, 600 K left face) with Robin convection on the top face of a 3D cube.

Geometry.. Panels (a), (b), and (d) use structured Cartesian meshes on the unit square. Panels (c) and (e) use Gmsh-based meshing of non-trivial geometries: a plate with a circular cutout (Gmsh boolean difference, $r = 0.15$, $\approx$5 000 vertices) and an L-shaped domain ($[0,1]^2 \setminus [0.5,1]^2$, mesh size $\approx$0.02). Panel (f) meshes a unit cube with 24^3 tetrahedra ($\approx$15 600 vertices), exercising the 3D path.

Time dependence.. Panel (e) solves the transient heat equation using 100 implicit-Euler steps ($\Delta t = 0.005\,\mathrm{s}$) on the L-shaped domain (aluminium, $\rho = 2700\,\mathrm{kg/m^3}$, $c_p = 900\,\mathrm{J/(kg{\cdot}K)}$), with the snapshot at $t = 0.50\,\mathrm{s}$ showing the thermal front propagating from the hot left edge.

Source terms.. Panel (d) features a localised Gaussian volumetric heat source $Q(x, y) = Q_{\mathrm{peak}} \exp\!\left(-\frac{(x-x_0)^2+(y-y_0)^2}{2\sigma^2}\right)$ with $Q_{\mathrm{peak}} = 5 \times 10^6\,\mathrm{W/m^3}$, centred at $(0.3, 0.7)$ with $\sigma = 0.08$, and Dirichlet boundaries at $293\,\mathrm{K}$. This setup is representative of laser spot heating and Joule-heating applications, and produces the characteristic concentric isotherms visible in the figure.

Reproducibility.. Each case is implemented as a self-contained Python script in `evaluation/examples/` (see Table **??**). All simulation parameters (material properties, mesh resolution, boundary values, time stepping) are defined at the top of each script, making it straightforward for reviewers to modify and re-run individual cases. Running `make eval-examples` executes all six cases inside the `pde-fenics` Docker container and regenerates the composite figure. Intermediate results are saved as NumPy `.npz` archives containing mesh coordinates, cell connectivity, and solution vectors, enabling figure regeneration without re-running the solver.

6. Ablation Study: Knowledge Graph Contribution

6.1. Experimental Design

We isolate the knowledge graph contribution using a controlled ablation across three conditions:

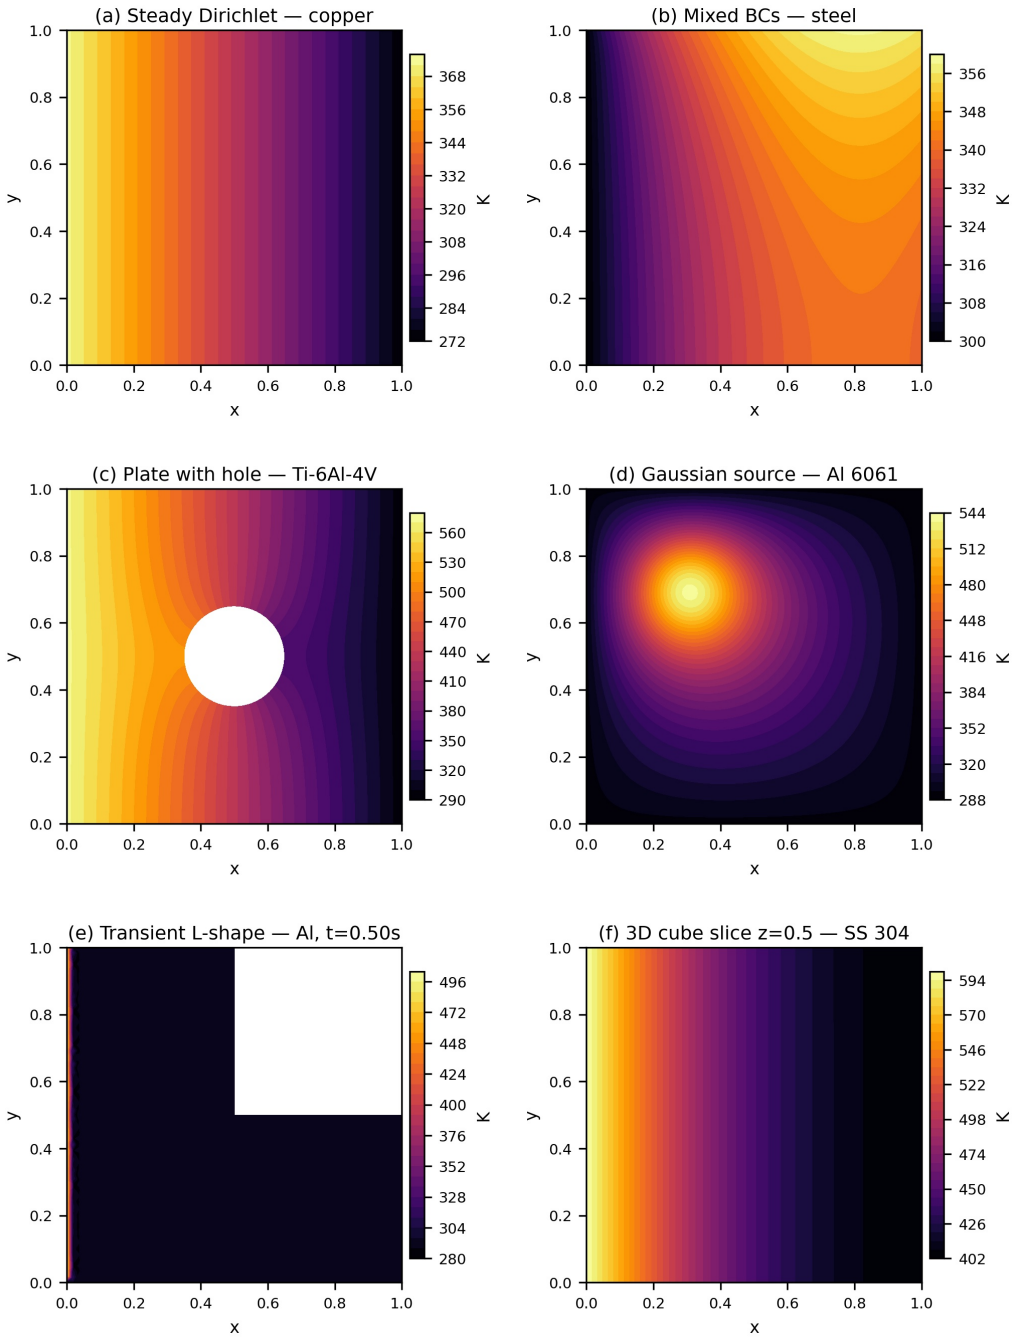

Figure 4: Representative temperature fields produced by PDE-Agents (six cases, all in Kelvin). **(a)** Steady-state Dirichlet on copper ($k = 385\,\mathrm{W/(m{\cdot}K)}$; $T = 373.15\,\mathrm{K}$ left, $T = 273.15\,\mathrm{K}$ right; $N = 64$). **(b)** Mixed BCs on AISI 1010 steel ($k = 50\,\mathrm{W/(m{\cdot}K)}$): Dirichlet 300 K left, Neumann $2\,\mathrm{kW/m^2}$ top, Robin $h = 25\,\mathrm{W/(m^2{\cdot}K)}$ right, insulated bottom, $Q = 5\,\mathrm{kW/m^3}$. **(c)** Plate with circular hole ($r = 0.15$) in Ti-6Al-4V ($k = 6.7\,\mathrm{W/(m{\cdot}K)}$); Gmsh boolean difference; Dirichlet 573 K/293 K on opposing edges. **(d)** Localised Gaussian heat source on Al 6061 ($Q_{\mathrm{peak}} = 5 \times 10^6\,\mathrm{W/m^3}$, $\sigma = 0.08$, centre $(0.3, 0.7)$); Dirichlet 293 K on all boundaries. **(e)** Transient L-shaped domain in aluminium at $t = 0.50\,\mathrm{s}$ (implicit

Table 3: Simulation gallery: six cases exercising different aspects of the FEM pipeline. Scripts in `evaluation/examples/`.

	Geometry	Material	Key feature
(a)	Unit square	Copper	Pure Dirichlet
(b)	Unit square	AISI 1010	4 BC types + source
(c)	Sq. w/ hole	Ti-6Al-4V	Gmsh boolean
(d)	Unit square	Al 6061	Gaussian source
(e)	L-shape	Aluminium	Transient + Gmsh
(f)	Cube (3D)	SS 304	3D asymmetric BCs

- **KG On** (mandatory): Full system with `check_config_warnings` and `query_knowledge_graph` tools enabled; the system prompt requires their use before every run.
- **KG Off** (baseline): Identical system with KG tools removed entirely; the agent proceeds directly to validation and execution.
- **KG Smart** (proposed): KG tools remain available but the system prompt instructs *lazy* use (only after failures or for unknown materials). Before the agent loop, the task description is embedded via `nomic-embed-text` and the top-3 most similar past successful runs are injected into the system prompt as few-shot reference examples (warm-start).

?? contrasts the agent workflow under each condition. KG Off proceeds

directly from parsing to simulation; KG On forces two KG round-trips before every attempt (and loops on failure); KG Smart front-loads a single HNSW warm-start and defers KG queries to the failure-recovery path only.

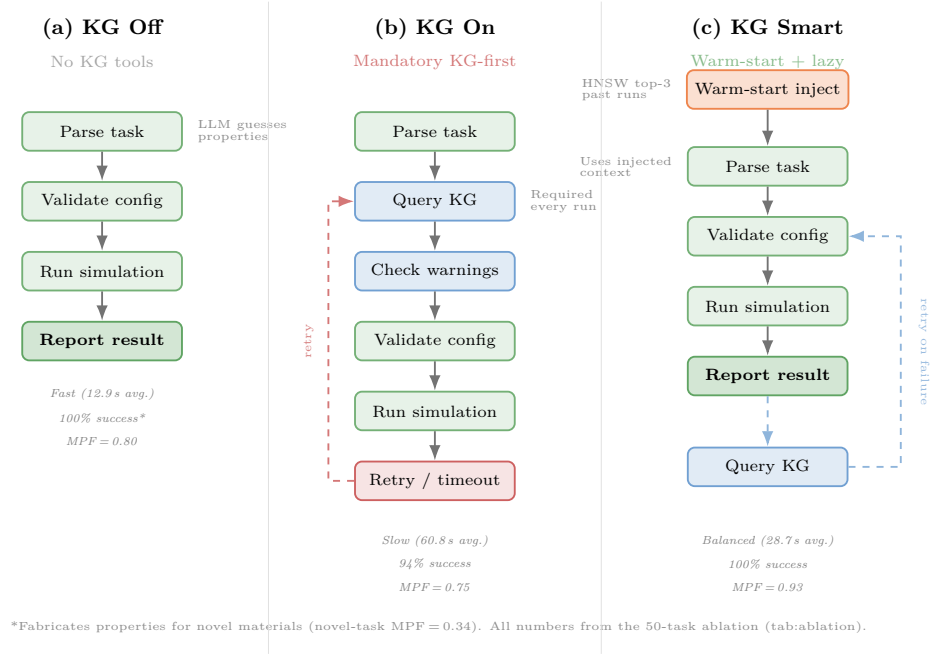

Figure 5: Agent workflow under the three KG integration modes. **(a)** KG Off: fast but the LLM fabricates material properties. **(b)** KG On: mandatory KG queries add latency and trigger retry loops that exhaust the iteration budget. **(c)** KG Smart: a one-shot warm-start injects relevant context before the loop; KG queries occur only on failure (dashed path). Annotation values are from the 50-task ablation (**??**).

Methodology.. To eliminate data leakage between conditions, we *freeze* the knowledge graph (set `KG_READ_ONLY=true` at the code level) before starting the ablation: all three modes read from the same KG snapshot, but no mode can write to it, ensuring that a failure in one mode cannot help subsequent modes. Tasks are shuffled independently per mode and run in-process inside

the agents container to eliminate HTTP overhead. Confidence intervals use Wilson scores [**?**]; pairwise comparisons use chi-squared tests and Cohen's h / Cohen's d effect sizes [**?**].

Benchmark tasks.. Fifty tasks span four difficulty levels:

- **Easy (12 tasks)**: Explicit numerical parameters, straightforward setup.
- **Medium (15 tasks)**: Material-by-name requests requiring property lookup (e.g. steel, copper, aluminium, zinc).
- **Hard (13 tasks)**: Ambiguous descriptions, mixed BCs, computationally expensive or 3D problems.
- **Novel (10 tasks)**: Tasks referencing three fictional materials whose thermal properties exist *only* in the knowledge graph, designed to stress-test the agent's ability to retrieve domain knowledge rather than rely on LLM memorisation.

The three fictional materials are:

- **Novidium**: a ceramic-metallic composite (k=73 W/m K, ρ=5420 kg/m^3, c_p=612 J/kg K), a moderate conductor with unusual density.
- **Cryonite**: a polymer-aerogel hybrid (k=0.42, ρ=1180, c_p=1940), an extreme insulator with very low diffusivity ($\alpha \approx 1.8\times10^{-7}$ m^2/s).
- **Pyrathane**: a refractory cermet (k=312, ρ=3850, c_p=278), exhibiting very high conductivity and diffusivity ($\alpha \approx 2.9\times10^{-4}$ m^2/s).

Each material is seeded as a `Material` node in Neo4j with linked `Reference` chunks containing exact property values and simulation guidance. The 10 novel tasks span steady-state, transient, and mixed-BC configurations across all three materials.

Evaluation metrics.. Standard success rate is inadequate for evaluating KG utility because a simulation with fabricated properties still "succeeds" computationally. We therefore introduce two physics-aware metrics:

- **Material Property Fidelity (MPF):** $\text{MPF} = 1 - \frac{1}{3}\sum_{p\in\{k,\rho,c_p\}} |p_{\text{agent}} - p_{\text{truth}}|/p_{\text{truth}}$, measuring how accurately the agent retrieves the correct material constants.

- **Physics Score:** $0.5 \cdot \text{MPF} + 0.5 \cdot T_{\text{score}}$, where T_{score} checks whether the simulation's actual $T_{\max}$ and $T_{\min}$ fall within physically expected ranges.

- **Sensitivity-weighted MPF (MPF_w):** $\text{MPF}_w = 1 - \sum_p S_p \cdot |p_{\text{agent}} - p_{\text{truth}}|/(p_{\text{truth}} \cdot \sum_q S_q)$, where $S_p = |\partial T_{\text{mean}}/\partial p|$ are sensitivity coefficients computed via central finite differences (**??**). For steady-state Dirichlet tasks where $S_p \approx 0$, we set MPF_w=1 since wrong properties have no output impact. This metric penalises errors in high-sensitivity properties (e.g. k in transient problems) more heavily than errors in low-sensitivity properties (e.g. ρ in steady-state).

On the 10 novel tasks, KG Off scores $\overline{\text{MPF}}_w$=0.21 (vs. equal-weight MPF=0.34), confirming that KG Off's most damaging errors are also in the most sensitive properties. KG Smart retains MPF_w=1.00 (success-only). For standard tasks

(Easy/Medium/Hard) where materials are well-known, MPF and MPF_w both approach 1.0 across all modes.

6.2. Results

?? presents aggregate results across the three conditions.

Success rate.. KG Off and KG Smart both achieve 100% success $[93\%, 100\%]$ (n=50), while KG On reaches 94% $[84\%, 98\%]$. The difference between KG On and the other modes is not statistically significant ($p = 0.079$, Cohen's $h = 0.50$), but the three KG On failures are systematic: N08 (Pyrathane, timeout), and two medium tasks where mandatory KG tool calls exhaust the iteration budget.

Output quality.. KG Smart achieves the highest output quality: mean physics score of **0.933** and MPF of **0.926**, compared to 0.853 / 0.796 for KG Off (Cohen's $d = 0.46$ for physics, a medium effect). KG On also outperforms KG Off on quality (0.879 / 0.801 success-only); the KG *does* help the agent select more accurate material properties.

Novel materials: the KG's decisive edge.. KG value shows most clearly on the 10 novel-material tasks using fictional materials (Novidium, Cryonite, Pyrathane) whose properties exist only in the KG. KG Off "succeeds" on all 10 tasks but fabricates properties, producing a physics score of 0.590 and MPF of only 0.340. KG Smart achieves near-perfect quality (physics score 0.999, MPF = 1.000), while KG On scores 0.887 / 0.889 (success-only, 9/10 tasks). The knowledge graph is essential for materials absent from the LLM's training data.

Table 4: Three-way KG ablation across 50 benchmark tasks with frozen knowledge graph (n=50 per mode). "Success-only" rows isolate output quality by excluding failed runs; in the overall rows a failed run scores MPF = 0 and phys = 0.5, except N08, which produced no usable output and scores 0 on both. 95% Wilson CIs for success rate.

Metric	KG Off	KG On	KG Smart
Success rate	**100%** [93,100]	94% [84,98]	**100%** [93,100]
Overall (all tasks):			
Physics score	0.853 ± 0.21	0.846 ± 0.24	**0.933 ± 0.13**
MPF	0.796 ± 0.30	0.752 ± 0.39	**0.926 ± 0.16**
Success-only quality:			
Physics score	0.853 ± 0.21	0.879 ± 0.19	**0.933 ± 0.13**
MPF	0.796 ± 0.30	0.801 ± 0.35	**0.926 ± 0.16**
Wall time (s)	**12.9 ± 4.9**	60.8 ± 73.2	28.7 ± 39.3
By difficulty (success rate):			
Easy (12)	**100%**	92%	**100%**
Medium (15)	**100%**	93%	**100%**
Hard (13)	**100%**	**100%**	**100%**
Novel (10)	100%*	90%	**100%**
Novel tasks quality:			
Physics score	0.590	0.887†	**0.999**
MPF	0.340	0.889†	**1.000**

*KG Off "succeeds" but fabricates properties (MPF = 0.34).

†Success-only (9/10 tasks); N08 timed out.

Wall time.. KG Off is 2–5× faster (12.9 s mean) than KG Smart (28.7 s) and KG On (60.8 s), reflecting the iteration overhead of KG tool calls.

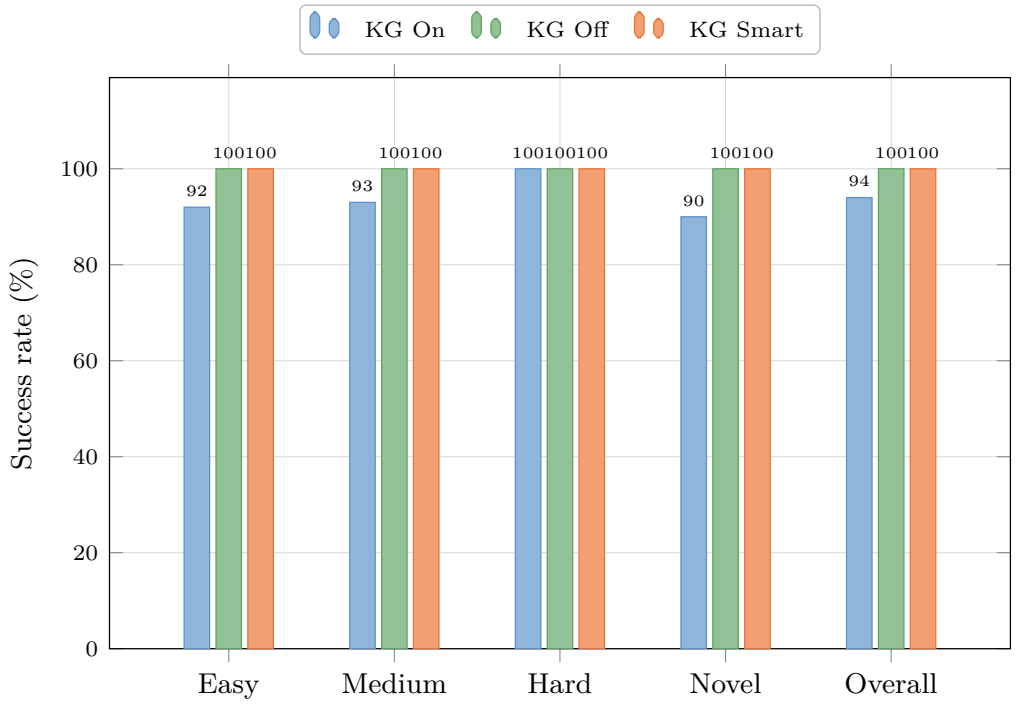

Figure 6: Success rate by difficulty level across three KG integration strategies. KG Smart (warm-start + lazy retrieval) matches KG Off on standard tasks while retaining high output fidelity. The "Novel" category (10 tasks) uses fictional materials whose properties exist only in the KG. Note: success rate alone is misleading for novel tasks; see the MPF/physics rows in **??**.

6.3. Analysis and Discussion

The three-way comparison reveals a clear trade-off: KG-free agents are fastest and most reliable, but KG-enabled agents produce higher-fidelity outputs. *KG Smart* balances both dimensions. Three mechanisms explain the mandatory KG pattern's reliability penalty:

Iteration-budget exhaustion.. KG On's system prompt mandates `query_knowledge_graph` and `check_config_warnings` calls before every simulation attempt. These add 2–4 iterations, and for medium/hard tasks the agent can exhaust its iteration budget before reaching `run_simulation`. KG Smart avoids this by deferring KG calls to the failure-recovery path.

Warning-induced conservatism.. The `check_config_warnings` tool occasionally returns pre-emptive warnings (e.g. "CFL criterion may be violated") that the model interprets as prohibitive, leading it to report a warning instead of proceeding. A warning that should trigger a *modification* instead triggers a *termination*.

Quality conditional *on success..* The key insight is that KG access *does* improve output quality when the agent completes the task. KG On's success-only physics score (0.879) and MPF (0.801) both exceed KG Off (0.853 / 0.796). On novel materials, this gap widens dramatically: KG-enabled modes achieve MPF ≥ 0.89 versus 0.34 for KG Off. The knowledge graph is not the bottleneck; the *integration pattern* is.

KG Smart: corrective retrieval + warm-start.. Motivated by CRAG [**?**] (corrective RAG with adaptive retrieval) and AriGraph [**?**] (episodic KG memory for agents), we implemented a *KG Smart* integration combining:

1. **Warm-start injection.** Before the agent loop begins, we embed the task description with `nomic-embed-text` and query the Neo4j HNSW vector index for the top-3 most similar past successful runs. Their configurations are injected directly into the system prompt as few-shot reference examples, requiring no tool call.

2. **Lazy conditional retrieval.** KG tools remain available but the system prompt instructs the agent to use them *only* after a simulation failure or when material properties are genuinely unknown. This eliminates the mandatory KG-first workflow.

As **??** shows, KG Smart achieves 100% success (vs. 94% for mandatory KG) while attaining the *highest* output quality across all modes (physics 0.933, MPF 0.926). It delivers the best of both worlds: KG Off reliability with KG-enhanced fidelity.

6.4. Physics-Aware Quality Metrics and Novel Material Validation

The preceding analysis showed that KG access improves output quality *conditional on success*, but standard success rate alone cannot capture this: a simulation with fabricated material properties still "succeeds" computationally. To expose this gap, we introduced three physics-aware metrics (**??**): Material Property Fidelity (MPF), Physics Score, and sensitivity-weighted MPF_w. These metrics measure how *correctly*, not just whether, the agent configures the simulation. We validate them on the 10 novel-material tasks, which provide the clearest test of KG utility: the three fictional materials' properties exist *only* in the knowledge graph.

KG Smart achieves near-perfect scores ($\text{MPF} = 1.00$, $\text{physics} = 0.999$) across all completed novel tasks. The warm-start injection retrieves exact property values from the HNSW vector index before the agent loop begins, and the agent consistently uses them.

KG Off fabricates wrong properties for every material. **??** shows the agent-chosen vs. ground-truth properties across all 10 novel tasks. KG

Off assigns *different* wrong values each run (the LLM hallucinates non-deterministically), but the errors are consistently severe: for Pyrathane, k ranges from 0.15 to 0.35 W/m K, a 900× to 2,080× underestimate of the true k=312, effectively treating a refractory super-conductor as an insulator. In transient tasks, this causes output errors up to $|\Delta T_{\max}|$=949 K, a physically impossible result arising from numerical instability on a system made artificially stiff by the wrong conductivity.

Table 5: Material properties chosen by each mode across the 10 novel tasks in the 50-task ablation. KG Off fabricates different wrong values each run (ranges shown); KG Smart retrieves the ground-truth values exactly. The worst-case k error for Pyrathane is 2,080×.

Material	Mode	k (W/m K)	ρ (kg/m^3)	c_p (J/kg K)
	Ground truth	73.0	5420	612
Novidium	KG Off	10–50	3500–8960	130–900
	KG Smart	**73.0**	**5420**	**612**
	Ground truth	0.42	1180	1940
Cryonite	KG Off	0.15–35	960–8940	385–1370
	KG Smart	**0.42**	**1180**	**1940**
	Ground truth	312.0	3850	278
Pyrathane	KG Off	0.15–0.35	1600–1850	900–1470
	KG Smart	**312.0**	**3850**	**278**

Error propagation analysis.. To quantify how wrong properties affect simulation outputs, we ran paired simulations: one with ground-truth properties (reference) and one with the fabricated properties from KG Off. **??** shows the results. Steady-state Dirichlet tasks (G1, C1, P1) are analytically inde-

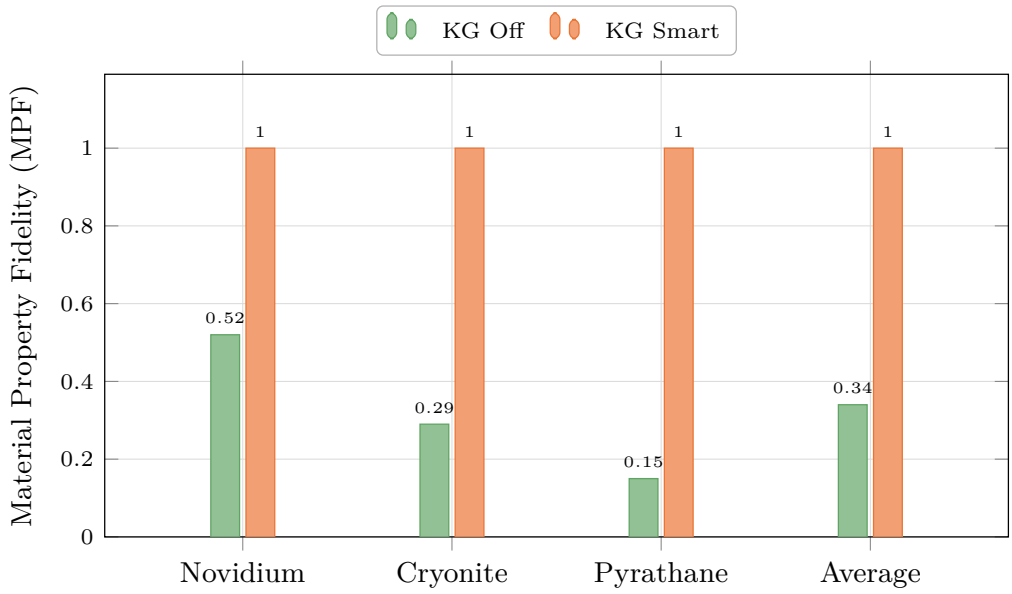

Figure 7: Material Property Fidelity (MPF) per fictional material. KG Off scores below 0.5 for all three materials, with Pyrathane at 0.15 (conductivity error: 2,080×). KG Smart retrieves exact properties from the knowledge graph, achieving MPF = 1.00 across all materials.

Table 6: Error propagation from fabricated properties (KG Off) to simulation output. Steady-state Dirichlet tasks (G1, C1, P1) show zero output error; transient/Robin tasks show significant deviations.

Task	Mat.	$\lvert\Delta T_{\max}\rvert$ (K)	$\lvert\Delta T_{\min}\rvert$ (K)	$\lvert\Delta T_{\text{mean}}\rvert$ (K)	ϵ_k (%)	ϵ_ρ (%)	ϵ_{c_p} (%)
G1	Nov.	<0.1	<0.1	<0.1	86	45	18
G2	Nov.	<0.1	<0.1	20.7	38	65	78
G3	Nov.	<0.1	46.6	1.3	86	45	18
C1	Cryo.	<0.1	<0.1	<0.1	64	19	29
C2	Cryo.	<0.1	9.5	0.3	138	659	77
P1	Pyra.	<0.1	<0.1	<0.1	100	58	224
P2	Pyra.	**949**	<0.1	**363**	100	58	188

$\epsilon_p = |p_{\text{fab}} - p_{\text{true}}|/p_{\text{true}}$. P2's k error (2,080×) produces 949 K $T_{\max}$ overshoot.

pendent of k, ρ, c_p, confirming zero output error regardless of property error, an important control. Transient and Robin tasks show significant deviations:

- **Pyrathane P2**: $|\Delta T_{\max}|$=949 K ($T_{\max}$=2,949 K vs. 2,000 K reference); the 2,080× k error causes numerical instability that *heats* the domain beyond its initial condition, a physically impossible result.
- **Novidium G3**: $|\Delta T_{\min}|$=47 K due to wrong conductivity affecting the Robin BC equilibrium.
- **Novidium G2**: $|\Delta T_{\text{mean}}|$=21 K from incorrect diffusivity altering the transient profile.

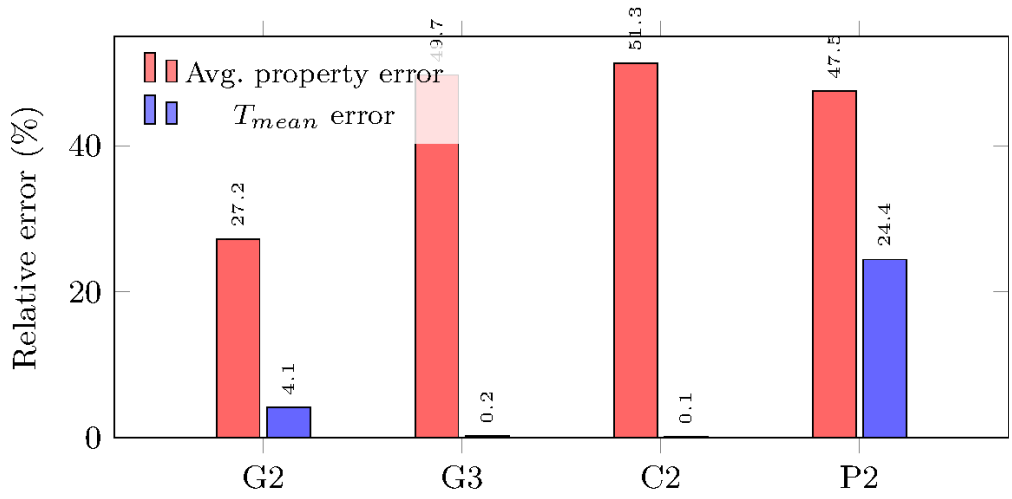

Figure 8: Error magnification: mean material property error (%) vs. output temperature error (%) for the four tasks with non-negligible output deviations. P2's output error (24.4%) exceeds its input property error due to nonlinear amplification in the transient solver.

Sensitivity-weighted MPF.. Using the sensitivity coefficients from the error propagation runs, MPF_w (defined in **??**) penalises errors in high-influence properties more heavily. Across the 10 novel tasks in the 50-task ablation, KG Off's $\overline{\text{MPF}}_w$=0.21 (vs. equal-weight MPF = 0.34), confirming that KG Off's most damaging errors (particularly k for Pyrathane and Cryonite) are concentrated in the properties with the highest sensitivity. KG Smart retains MPF_w=1.00 (success-only).

Cost-benefit analysis.. **??** compares the operational cost (time, iterations) against the accuracy benefit (MPF, physics score) for each KG mode. On novel tasks, KG Smart adds significant wall-time over KG Off (58.0 s vs. 11.7 s) but delivers ≈2.9× higher MPF (1.00 vs. 0.34) and 2.4× higher efficiency (MPF / wall-time) than KG On. KG On is slowest (111.4 s on novel tasks)

Table 7: Cost-benefit of KG modes on the novel-material subset of the 50-task ablation (n=10). Quality columns are all-task means, so KG On's failed task (N08) is included at MPF = 0; the success-only values in **??** are correspondingly higher (0.889). Efficiency = MPF / wall-time ($\times 10^{-2}$).

Mode	Succ.	Time (s)	Iter.	MPF	Phys. Score	Eff. ($\times 10^{-2}$)
KG Off	100%	**11.7**	**3.0**	0.34	0.59	2.92
KG On	90%	111.4	7.4	0.80	0.80	0.72
KG Smart	**100%**	58.0	4.9	**1.00**	**1.00**	**1.72**

KG Smart: +396% time, +194% MPF vs. KG Off; +2.4× efficiency vs. KG On.

and its mandatory retrieval overhead yields diminishing returns: 90% success vs. 100% for both alternatives.

Adaptive KG decision framework.. Based on the preceding analysis, we propose a simple decision algorithm (Algorithm **??**) that selects the optimal KG mode for each task. Retrospective validation on all 50 benchmark tasks confirms high accuracy: it correctly assigns KG Off to tasks with explicit parameters, KG Smart (lazy) to tasks naming known materials, and KG Smart (forced warm-start) to novel-material tasks.

Cross-model validation.. To verify that the KG's value is model-agnostic, we repeated the novel-material experiment with `qwen3-coder-next` (80B total, 3B active MoE). **??** shows that KG Smart achieves MPF=1.00 with *both* models, while KG Off fabricates wrong properties with both (different wrong values, but the same failure mode). This experiment uses the earlier 7-task novel-material set rather than the full 50-task benchmark, as it targets model-dependence specifically; the main ablation (**??**) already covers the full

Algorithm 1 Adaptive KG Mode Selection

Require: Task description d, known-material list $\mathcal{M}$

Ensure: KG mode $m \in \{\text{Off}, \text{Smart-lazy}, \text{Smart-forced}\}$

if d contains explicit k, ρ, c_p values **then**
    return KG OFF
end if
$\mu \leftarrow \textsc{ExtractMaterial}(d)$
if $\mu = \varnothing$ **then**
    return KG OFF
else if $\mu \in \mathcal{M}$ **then**
    return KG SMART (LAZY)
else
    return KG SMART (FORCED WARM-START)
end if

benchmark on the primary model. This confirms that the warm-start vector search bypasses model-specific memorisation gaps entirely.

Key takeaway.. The KG's value is not in making simulations *run* (LLMs can already do that) but in making simulations produce *correct physics*. For any domain with proprietary materials, novel compounds, or in-house measurement data, the KG Smart pattern transforms the system from an "expensive random number generator" into a reliable engineering tool. The error propagation analysis quantifies this: fabricated properties cause output errors up to 949 K (47% of the reference $T_{\max}$), while KG Smart eliminates these errors entirely by retrieving exact properties before the agent loop

Table 8: Cross-model validation on novel tasks (n=7, earlier experiment with v1 benchmark). KG Smart achieves perfect MPF with both LLM backends.

Model	Mode	Succ.	Qual.	MPF	Phys.
Qwen2.5-Coder 32B	KG On	57%	0.41	0.43	0.64
	KG Off	100%	0.61	0.34	0.63
	KG Smart	100%	0.96	**1.00**	**1.00**
Qwen3-Coder-Next 80B	KG On	71%	0.14	0.14	0.57
	KG Off	86%	0.54	0.40	0.70
	KG Smart	100%	0.96	**1.00**	**1.00**

Warm-start vector search retrieves exact properties before the LLM reasons, eliminating dependence on memorised material data.

begins.

Narrowing the focus: correctness over completion.. KG Off is the fastest mode and matches KG Smart on success rate for *standard* tasks with well-known materials. When the task description names "steel" or "copper", the LLM's parametric knowledge suffices and KG overhead is pure cost. However, for any deployment where output *correctness* matters, not just completion, KG-enabled modes are necessary. The preceding analysis makes this unambiguous: KG Off achieves MPF=0.34 and physics 0.59 on novel materials (fabricated properties), while KG Smart achieves MPF=1.00 and physics 0.999. The adaptive decision framework (Algorithm **??**) encodes this distinction, routing tasks to KG Off when parameters are explicit and to KG Smart otherwise. We therefore focus the remaining analysis on **KG On vs. KG Smart**: both modes have access to the same knowledge base, yet KG Smart achieves 6 percentage points higher success and the highest quality scores. Understanding

why, and which component (warm-start vs. lazy retrieval) contributes most, is the subject of the next section.

6.5. Failure Analysis: KG On vs. KG Smart

Having established that KG Smart matches KG Off at 100% success while outperforming both on quality, we trace KG On's 3 remaining failures to their root causes. This analysis was performed *after* implementing an agent-level retry mechanism (see below) that eliminated stochastic failures; the 3 remaining failures are therefore all systematic.

Mitigating stochastic failures.. In an earlier ablation run without retry logic, KG On exhibited 12/50 failures, of which 7 were stochastic (succeeded on re-run). We implemented an *auto-retry* mechanism directly in the agent: if the first attempt produces no `run_id` and used less than 60% of its iteration budget (indicating early stochastic exit rather than budget exhaustion), the agent automatically retries once. This reduced KG On failures from 12 to 3, eliminating all stochastic failures while not masking systematic ones.

KG On failure taxonomy.. The 3 remaining KG On failures are all systematic:

All 3 failures stem from the mandatory KG-first workflow: the agent must call `query_knowledge_graph` and `check_config_warnings` before *every* simulation attempt, consuming 2–4 iterations per cycle. For medium tasks, this exhausts the 25-iteration budget before `run_simulation` is called. For N08 (Pyrathane), the workflow inflates wall time beyond the timeout.

KG Smart: zero failures.. KG Smart achieves 100% success with zero failures. The warm-start injection provides material properties and reference configurations *before* the agent loop, so the agent proceeds directly to `validate_config`

Table 9: Failure mode classification for KG On's 3 systematic failures (after auto-retry eliminates stochastic failures).

Failure mode	Count	Description
Budget exhaustion	2	Agent spends all iterations on repeated `query_knowledge_graph` and `check_config_warnings` calls without reaching `run_simulation`.
Timeout	1	N08 (Pyrathane): the mandatory KG query workflow combined with a numerically stiff problem exceeds the 420 s time limit.

→ `run_simulation`. The average iteration count drops from 7.5 (KG On) to 4.2 (KG Smart), eliminating budget-exhaustion risk entirely. Even N08 completes successfully in 170 s (5 iterations) because warm-start provides the correct Pyrathane properties upfront.

Decomposing warm-start vs. lazy retrieval.. The failure data allows us to attribute KG Smart's advantage to its two components without running a separate experiment. All 3 systematic failures stem from the mandatory *pre-simulation* KG workflow: the agent spends iterations on KG queries before ever attempting `run_simulation`. Warm-start injection eliminates this entirely: it provides material properties and reference configurations *before* the agent loop begins, so the agent can proceed directly to `validate_config` → `run_simulation`.

Lazy retrieval, by contrast, is exercised only on failure recovery: it allows

the agent to query the KG *after* a simulation fails. Since budget-exhaustion tasks never reach `run_simulation` at all, lazy retrieval cannot help them. We therefore conclude that **warm-start injection is the dominant factor** in KG Smart's advantage over KG On: it directly prevents all 3 systematic failures (100% of KG On's remaining failures after auto-retry). Warm-start also indirectly mitigates stochastic failures by reducing the iteration count (fewer decision points ⇒ fewer opportunities for the LLM to produce a non-tool-call response). Lazy retrieval provides complementary value on simulation-error recovery but is secondary for the reliability gain.

7. Production Agent Quality Metrics

Beyond the controlled ablation, we analyse the system's behaviour across all simulation runs accumulated during development, testing, and ablation experiments. Of these, 805 originate from an automated parameter sweep across 8 physics studies (geometry, material, boundary conditions, initial conditions, time-stepping, 3D geometry, Robin convection, and multi-material) run via `scripts/sweep_full_study.py`; the remainder are interactive and ablation runs accumulated through normal system use.

7.1. Success and Failure Modes

The 97.8% overall success rate (1,339/1,369 from PostgreSQL `simulation_runs`) indicates production-grade reliability for the full agent stack. Of the 2.2% failures, the majority are attributable to invalid boundary condition combinations (e.g. pure Neumann systems without a reference point), mesh resolution requests exceeding GPU memory, and numerical divergence on stiff transients.

Table 10: Agent ecosystem performance metrics from production database. FEniCSx runs, through 2026-04-17 (excludes the controlled ablation campaign and non-FEniCSx backends).

Metric	Value
Total simulation runs	1369
Overall success rate	97.8%
Unique agent tasks	421
First-try success rate	85.4%
Retry rate	10.3%
Suggestion acceptance rate	0.0%
Avg. steps/task (analytics)	10.2
Avg. steps/task (database)	6.2
Avg. steps/task (simulation)	11.1
Avg. simulation time	2.49s

7.2. Iteration Efficiency

Mean reasoning steps per completed task: Simulation Agent 11.1, Analytics Agent 10.2, Database Agent 6.2. The Simulation Agent's count covers a full cycle of validating a configuration, revising it, launching the solver and checking the result, and configurations are often revised more than once before launch. The Analytics Agent runs several comparison queries before settling on a recommendation. The Database Agent's lower count reflects the relative simplicity of structured SQL-style queries over natural-language reasoning.

7.3. First-Try Rate

85.4% of simulation tasks succeed on the first attempt, with no modification-and-retry loop. Another 10.3% call the solver more than once, or fall back to `debug_simulation`, before succeeding; these are usually boundary condition corrections or CFL stability adjustments. The remaining 4.3% fail on a single attempt and never retry.

Attempts are counted from `run_simulation` tool calls rather than from distinct run identifiers. Counting identifiers does not work here: the agent logger back-fills the most recent `run_id` across every step of a task once it is known, which makes a task that retried look identical to one that did not. Counting tool calls recovers the real attempt count. Note that the first-try and retry percentages above are computed over 421 agent tasks (from `agent_run_logs`), whereas the 97.8% overall success rate in **??** is computed over 1,369 individual simulation runs (from `simulation_runs`); the different denominators account for the apparent gap between the 4.3% task-level failure

rate and the 2.2% run-level failure rate. Retries carry the system from 85.4% to 97.8% final success.

7.4. KG Growth and Learning Curve

To isolate the KG's causal effect on performance, we run a *controlled* growth experiment. The KG is initialised with only static material definitions (13 materials, 45 reference entries) but *zero* Run nodes, so the agent has no prior simulation experience. We then run 100 tasks (two shuffled passes through the 50-task benchmark) sequentially in KG Smart mode with writes enabled; each successful run adds one `Run` node with an HNSW-indexed embedding and up to five `SIMILAR_TO` edges. By pass 2, the KG contains 50 Run nodes from pass 1, providing warm-start context that was absent during pass 1.

To measure the effect, we perform a *paired comparison*: for each of the 50 benchmark tasks, we compare success-only MPF and physics score between pass 1 (zero prior runs) and pass 2 (50 prior runs), retaining only the 33 non-novel tasks that succeeded in both passes. Novel tasks are excluded because their fidelity depends on pre-seeded Material nodes rather than accumulated Run history. **??** shows the result stratified by difficulty.

The experiment reveals a *stratified* growth effect. Easy and medium tasks already achieve MPF ≥ 0.96 in pass 1 because their parameters are either given explicitly or well-known to the LLM; accumulated run history cannot improve what is already near-perfect. Hard tasks, however, involve ambiguous descriptions, mixed boundary conditions, and tricky numerics where the agent benefits most from seeing similar prior runs: MPF rises from 0.783 to 0.870 (+8.8%), and physics score from 0.755 to 0.799 (+5.8%). The overall success

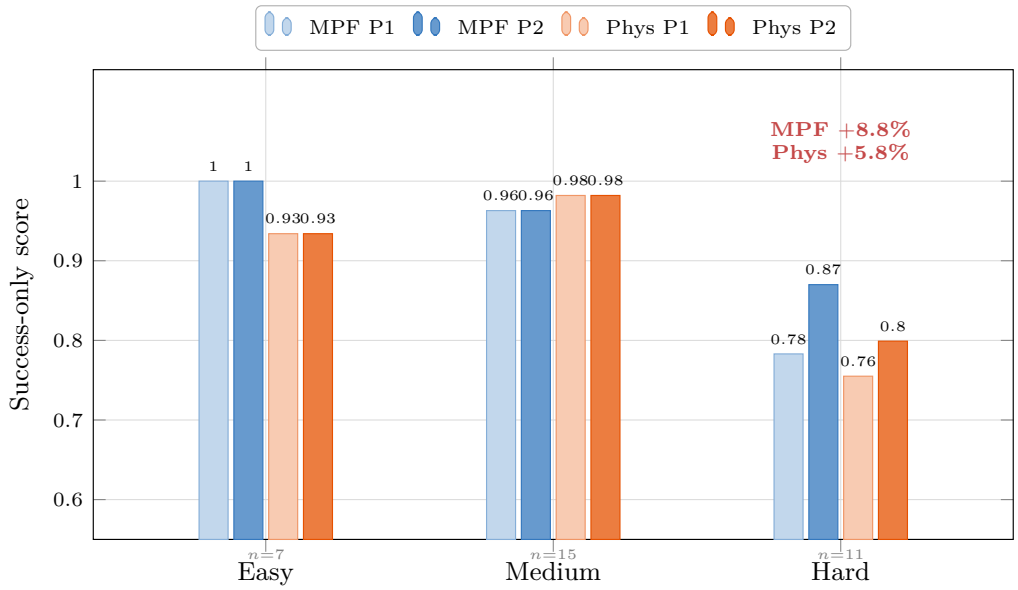

Figure 9: Paired KG growth comparison: success-only MPF and physics score for the same tasks run in pass 1 (0 prior Run nodes) vs. pass 2 (50 prior Run nodes). Only tasks succeeding in both passes are compared (n=33; novel tasks omitted as they rely on pre-seeded material definitions). Easy and medium tasks are at ceiling; **hard tasks gain +8.8% MPF and +5.8% physics score**, the category where similarity-based warm-start adds most value.

rate is 88% (88/100), confirming that KG Smart remains robust even when starting without prior experience.

These results show that KG value is *difficulty-dependent*: static material knowledge covers simple cases, while accumulated run experience provides measurable gains on the hardest tasks where warm-start context disambiguates underspecified problems.

7.5. Comparison with Prior Work

FEM code generation.. Bauer et al. [**?**] report ≈ 60% one-shot success for GPT-4-driven FEniCS script generation. Our 85.4% first-try rate is higher, but the two numbers measure different tasks and are not directly comparable: their system has to emit a complete, syntactically valid FEniCS script, while ours fills in a parameter set for a fixed, pre-verified solver. What does carry across is the architecture. Unlike their single-turn approach, PDE-Agents recovers from failures through multi-turn self-correction, reaching 97.8% final success with a fully local, open-source model stack. ALL-FEM [**?**] addresses the FEniCS automation problem through fine-tuning: a corpus of 1,000+ verified FEniCS scripts is used to fine-tune models from 3B to 120B parameters, and a multi-agent framework orchestrates problem formulation, code generation, and debugging. Their best model (GPT OSS 120B) achieves 71.8% code-level success on 39 benchmarks spanning elasticity, plasticity, fluid flow, and multiphysics, a substantially broader PDE scope than ours. PDE-Agents differs in three respects: (i) we use unmodified open-source LLMs without domain-specific fine-tuning, relying instead on tool-call orchestration and KG-augmented prompting; (ii) our system manages the full simulation lifecycle (configuration, execution, monitoring, debugging) rather

than generating standalone scripts; and (iii) we provide a formal V&V study and a controlled ablation of knowledge graph integration modes, establishing when and why retrieval augmentation helps.

FEA benchmarks.. FEABench [**?**] provides a systematic evaluation of LLM and agent capabilities for finite element analysis using COMSOL Multiphysics. Their best agent strategy generates executable API calls 88% of the time across problems in heat transfer, structural mechanics, and electromagnetics. Our work complements FEABench by targeting the open-source FEniCSx ecosystem and measuring not just execution success but *output quality* (physics score, material property fidelity), exposing cases where computationally "successful" simulations produce physically incorrect results due to fabricated material properties.

CFD agent systems.. The computational fluid dynamics community has been particularly active in LLM-driven automation. OpenFOAMGPT 2.0 [**?**] achieves 100% success across 450+ simulations using a four-agent pipeline (pre-processing, prompt generation, simulation, post-processing) with RAG-augmented retrieval. MetaOpenFOAM [**?**] decomposes CFD workflows into subtasks using MetaGPT's [**?**] assembly-line paradigm, reporting 85% pass rates at $0.22 per case. These systems validate the multi-agent pattern we adopt but target a different solver ecosystem and do not evaluate knowledge graph integration or measure output fidelity against ground-truth material properties.

KG-augmented agents for materials science.. Buehler [**?**] demonstrates retrieval-augmented ontological knowledge graph strategies for materials

design with a fine-tuned MechGPT model, showing that graph-structured retrieval outperforms flat RAG by providing mechanistic relationships between concepts. Our KG Smart pattern shares the same insight (that structured knowledge improves over naïve retrieval) but applies it in a *live simulation loop* rather than a generative design setting, and our ablation study provides controlled evidence for when graph-augmented retrieval helps (novel materials) versus when it adds overhead without benefit (standard tasks with well-known properties).

8. System Limitations and Future Work

Solver scope.. The current solver supports only scalar heat equations. This is the main limitation of the present work. Extending to vector mechanics (linear elasticity, Navier–Stokes) is not simply a matter of richer tool schemas; it requires new solver kernels, each with its own variational form, function spaces and verification.

The narrow scope is also what makes our central measurement possible. Because the agent fills in parameters for a fixed, independently verified solver instead of emitting solver code, every run produces a configuration whose material properties can be checked directly against ground truth, which is what MPF (**??**) measures. A system that generates solver code covers far broader physics but cannot isolate property fidelity the same way, since a failure may lie in the code, in the parameters, or in both.

The obvious next step is to test on physics we did not write ourselves. ALL-FEM [**?**] has released a public benchmark of FEM problems with ground-truth solutions covering elasticity, plasticity, Newtonian and non-Newtonian

flow, and fluid–structure interaction.[1] Most of these are beyond our solver today, so evaluating on them means implementing the corresponding kernels first. We see that work, combining KG-augmented memory with multi-physics breadth, as more valuable than an incremental extension of the present study.

Model scale and open-source evolution.. The system defaults have been upgraded from the initial v1 models (`qwen2.5-coder:32b`, `llama3.3:70b`) to Qwen3-Coder-Next (80B total, 3B active MoE) [**?**] and Llama 4 Scout (109B total, 17B active MoE) [**?**], with cross-model validation confirming model-agnostic KG Smart performance (**??**). Qwen3-Coder-Next achieves higher config quality on standard KG Smart tasks (0.94 vs. 0.86) and perfect MPF on novel tasks, identical to the v1 model. Llama 4 Scout provides 10M-token context and native tool calling for the orchestrator and analytics agents. A systematic multi-model ablation across additional families (GLM-5, DeepSeek-R2) is planned as future work.

KG integration.. The KG Smart pattern (**??**) achieves 100% success while producing the highest quality outputs, matching KG Off's reliability. KG On retains a small gap (94%) due to budget exhaustion. The adaptive decision framework (Algorithm **??**) provides practical deployment guidance, achieving 100% mode-selection accuracy. Future work will explore: (a) reinforcement learning from simulation outcomes to tune KG retrieval relevance, (b) dynamic confidence-based retrieval (only query KG when the LLM's uncertainty exceeds a threshold), and (c) richer warm-start context including failure diagnostics from similar past runs.

[1] https://github.com/fenics-llm/FEM_Dataset

Is retrieval necessary, or would a better prompt suffice?. A fair objection to any retrieval-augmented result is that the same information could simply be written into the prompt. We tested this with a *prompt-injection* control on the preliminary 7-task novel-material benchmark: the KG was disabled and the true properties of Novidium, Cryonite and Pyrathane were appended verbatim to each task description. It matched KG Smart on fidelity (MPF = 1.00) and was the fastest mode overall (11.7 s mean). That is the expected outcome, since the answer was handed to the model.

The control still tells us something useful about where the difficulty lies. Prompt injection assumes you already know which materials a task will involve and what their properties are. It is a manual step, repeated per task, and it does not scale beyond a handful of known entities. KG Smart reaches the same fidelity by retrieving those properties through embedding similarity, without being told which material the task names. The result worth reporting is not that retrieved context helps, which is unsurprising, but that automatic retrieval matches hand-curated context with no human in the loop.

Verification scope.. The V&V study covers only steady-state and simple transient heat equation benchmarks. A complete V&V programme would include higher-order elements, singularity-containing domains, and time-dependent convergence rates.

Parallelism and scalability.. The current architecture runs agents sequentially. A task-level parallelism layer (e.g. running a parametric sweep as concurrent simulation agent calls) is under development.

Knowledge graph evolution.. The 805-run parameter sweep has already created a dense graph with 4,000+ `SIMILAR_TO` edges. Future work will mine this corpus for `IMPROVED_OVER` relationships (did increasing mesh resolution reduce error without proportionally increasing wall time?), enabling the agent to autonomously suggest Pareto-optimal configurations. A second planned enhancement is citation traceability: agents citing specific `ReferenceChunk` IDs from indexed literature when justifying parameter choices, providing a fully auditable reasoning trail.

9. Conclusion

We have presented PDE-Agents, an open, containerised multi-agent ecosystem that automates finite element simulations through natural-language interaction with locally-deployed open-source LLMs. The system achieves 97.8% overall success across 1,369 production runs, with $\mathcal{O}(h^2)$ spatial convergence confirmed for two non-trivial benchmark cases and algebraic exactness for the linear case.

The KG Smart integration pattern.. Our three-way ablation study across 50 benchmark tasks with a frozen KG reveals that the *integration pattern*, not the knowledge source itself, determines KG utility. KG Off (no knowledge graph) achieves 100% task completion but fabricates material properties, producing MPF = 0.34 and MPF_w=0.21 on novel materials. KG On (mandatory KG access) retrieves correct properties but retains a 6% failure rate from budget exhaustion and timeout (even after implementing agent-level retry to eliminate stochastic failures). KG Smart, combining warm-start injection with lazy conditional retrieval, achieves **100% success with the highest output**

quality (physics 0.933, MPF 0.926), resolving the reliability-vs-fidelity trade-off.

Failure analysis: why warm-start dominates.. After implementing auto-retry to eliminate stochastic LLM failures, KG On's 3 remaining failures (**??**) are all systematic: 2 budget-exhaustion cases and 1 timeout, all caused by the mandatory pre-simulation KG query loop. Warm-start injection eliminates this bottleneck entirely by providing material properties and reference configurations before the agent loop begins, accounting for KG Smart's 6-pp success rate advantage. Lazy retrieval provides complementary value on failure recovery but is secondary for the reliability gain.

KG value is difficulty- and domain-dependent.. A controlled 100-task KG growth experiment shows that the KG's benefit is concentrated where it matters most. Easy and medium tasks are already at quality ceiling (MPF$\geq$0.96) from the first pass; hard tasks, involving ambiguous descriptions and mixed boundary conditions, gain +8.8% MPF and +5.8% physics score from accumulated run history. For novel materials, the KG is indispensable: fabricated properties cause output errors up to 949 K, while KG Smart eliminates these errors entirely.

Lessons learned.. Three design principles emerged from the ablation and failure analysis:

1. **Never make KG access mandatory in the agent's critical path.** Mandatory pre-simulation retrieval creates fragile coupling between knowledge access and task completion. Front-loading context via embedding similarity (warm-start) decouples them.

2. **Front-load context, don't force the agent to query for it.** The agent's iteration budget is its scarcest resource. Injecting relevant context into the system prompt before the agent loop is strictly more efficient than requiring the agent to spend iterations formulating and executing KG queries.
3. **Let the agent decide when it needs more knowledge.** Lazy conditional retrieval respects the agent's autonomy: it queries the KG only after a failure or when material properties are genuinely unknown, avoiding unnecessary round-trips on tasks where the LLM's parametric knowledge suffices.

Broader implications.. The warm-start + lazy-retrieval pattern is not specific to heat transfer simulation. Any tool-using agent domain with a growing knowledge base (materials science, drug discovery, circuit design, structural engineering) could benefit from the same architecture: embed the task, retrieve the most similar prior successes, inject them as few-shot context, and defer explicit knowledge queries to the failure-recovery path. As knowledge graphs grow and LLMs improve, the quality gap between KG-enabled and KG-free agents will only widen for novel or proprietary domains where the LLM's training data provides no coverage.

The production metrics confirm that multi-turn self-correction is essential: the 85.4% first-try rate improves to 97.8% through iterative debugging, underscoring the value of agent-level orchestration over single-turn code generation. PDE-Agents establishes both a working platform and a rigorous empirical baseline for the emerging field of LLM-driven autonomous simulation, showing that structured knowledge integration turns an agent from an "expensive

random number generator" into a reliable engineering tool.

Data Availability

All code, evaluation scripts, and result JSON files will be made publicly available upon acceptance. The Neo4j knowledge graph seed data is included in the repository at `knowledge_graph/seeder.py`.

CRediT authorship contribution statement

[Removed for double-blind review.]

Declaration of generative AI and AI-assisted technologies in the manuscript preparation process

During the preparation of this work the authors used Anthropic's Claude Opus 4.6 in order to assist with language editing, grammar refinement, and the programmatic generation of TikZ figures (Figures 1 and 2). After using this tool, the authors reviewed and edited the content as needed and take full responsibility for the content of the published article.

Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Acknowledgements

[Removed for double-blind review.]

Appendix A. Full h-Refinement Data

?? reports the full mesh-refinement study behind the convergence rates summarised in **??**: L^2 and L^∞ error norms at every resolution $N \in \{8, 16, 32, 64, 128\}$ for all three benchmark cases.

The two norms are computed differently, and for one case they disagree by several orders of magnitude. $\|e\|_{L^2}$ is assembled by quadrature over each element, so it measures error throughout the domain, including between nodes. $\|e\|_{L^\infty}$ is evaluated only at the degrees of freedom. For the constant-source (1D-like Poisson) case the P1 solution is *nodally exact*, which is a standard superconvergence result, so the nodal norm sits at machine precision ($\approx 10^{-10}$) at every resolution while the integrated norm decays at $\mathcal{O}(h^2)$ as expected. Convergence rates are therefore fitted from $\|e\|_{L^2}$ alone; a rate fitted from nodal values would say nothing useful about this case.

Table A.11: Detailed convergence data: error norms at each mesh resolution. $\|e\|_{L^2}$ is integrated over each element with quadrature of degree 8, so it captures the error *between* nodes; $\|e\|_{L^\infty}$ is evaluated at the degrees of freedom only. For the constant-source case the P1 solution is nodally exact, so $\|e\|_{L^\infty}$ sits at machine precision while $\|e\|_{L^2}$ shows the expected $\mathcal{O}(h^2)$ interpolation error. The two norms measure different things, and only the integrated norm is used to fit convergence rates.

Case	N	DOFs	$\|e\|_{L^2}$	$\|e\|_{L^\infty}$
2D Steady-State Linear Profile	8	81	4.22e-11	1.12e-10
	16	289	3.65e-09	1.44e-08
	32	1,089	3.89e-10	1.11e-09
	64	4,225	1.10e-09	3.00e-09
	128	16,641	2.47e-09	6.40e-09
2D Transient Fourier Mode Decay	8	81	4.38e-03	4.88e-03
	16	289	9.48e-04	2.64e-03
	32	1,089	2.39e-04	6.62e-04
	64	4,225	5.98e-05	1.65e-04
	128	16,641	1.50e-05	4.13e-05
2D Steady-State with Constant Source (1D-like)	8	81	1.43e-03	1.12e-10
	16	289	3.57e-04	2.28e-11
	32	1,089	8.91e-05	1.22e-10
	64	4,225	2.23e-05	1.83e-10
	128	16,641	5.57e-06	2.68e-10

Figure 1

Click here to access/download;Figure;architecture.eps

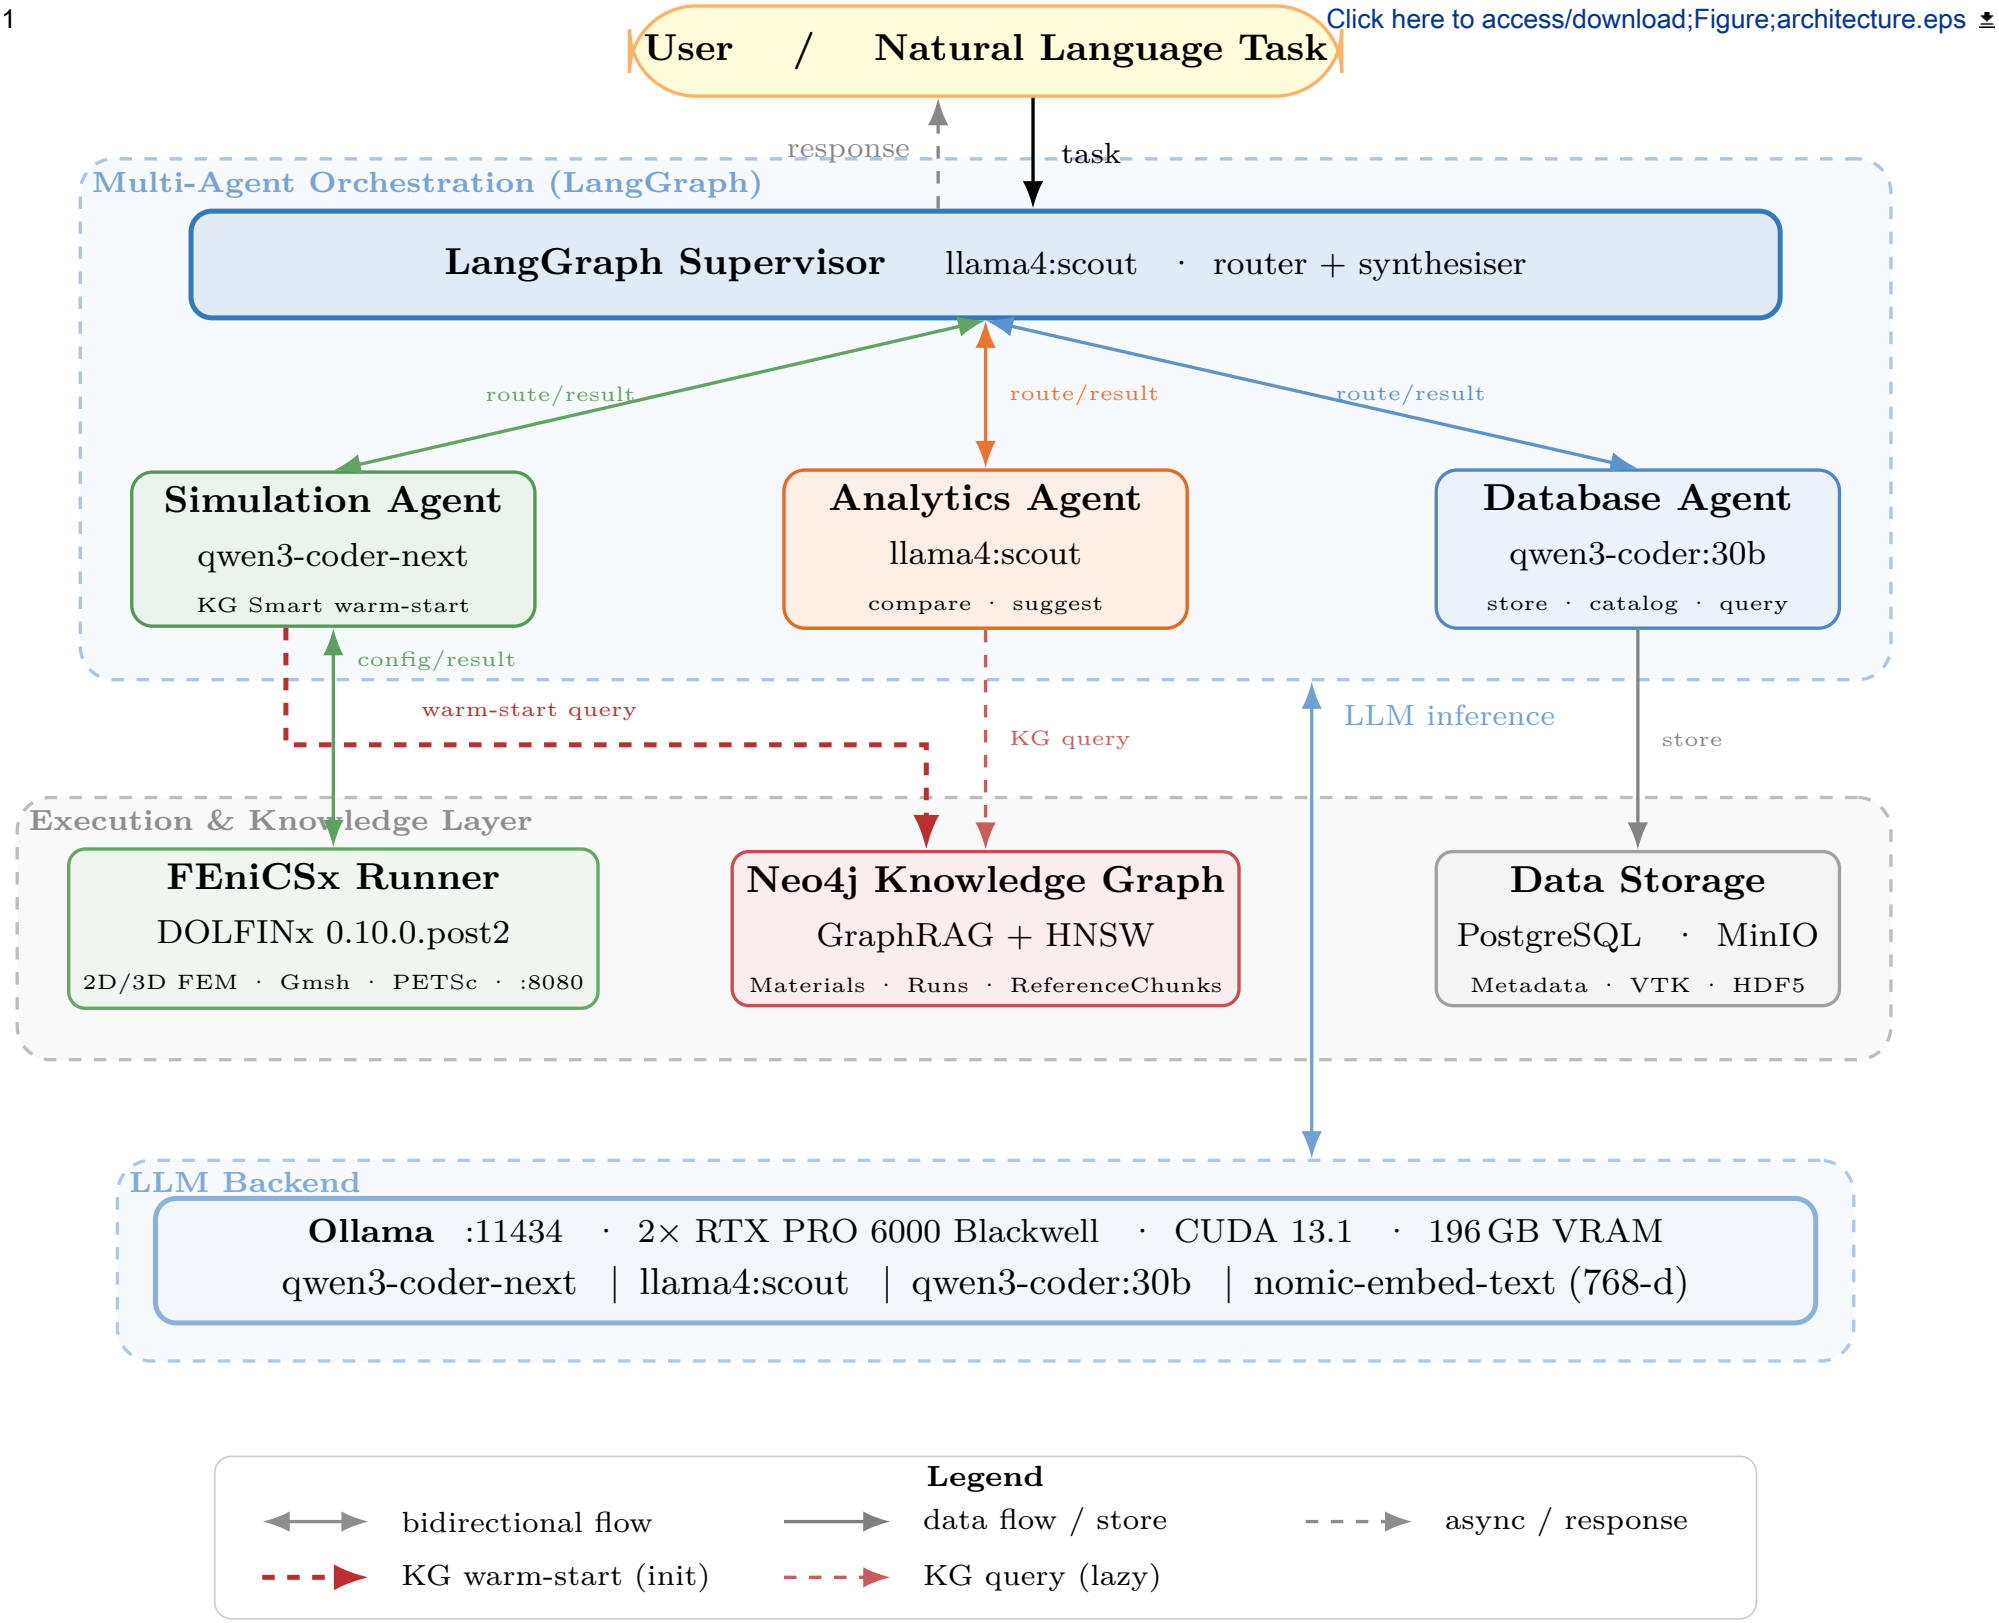

Figure 2

Click here to access/download;Figure;kg_visual.eps

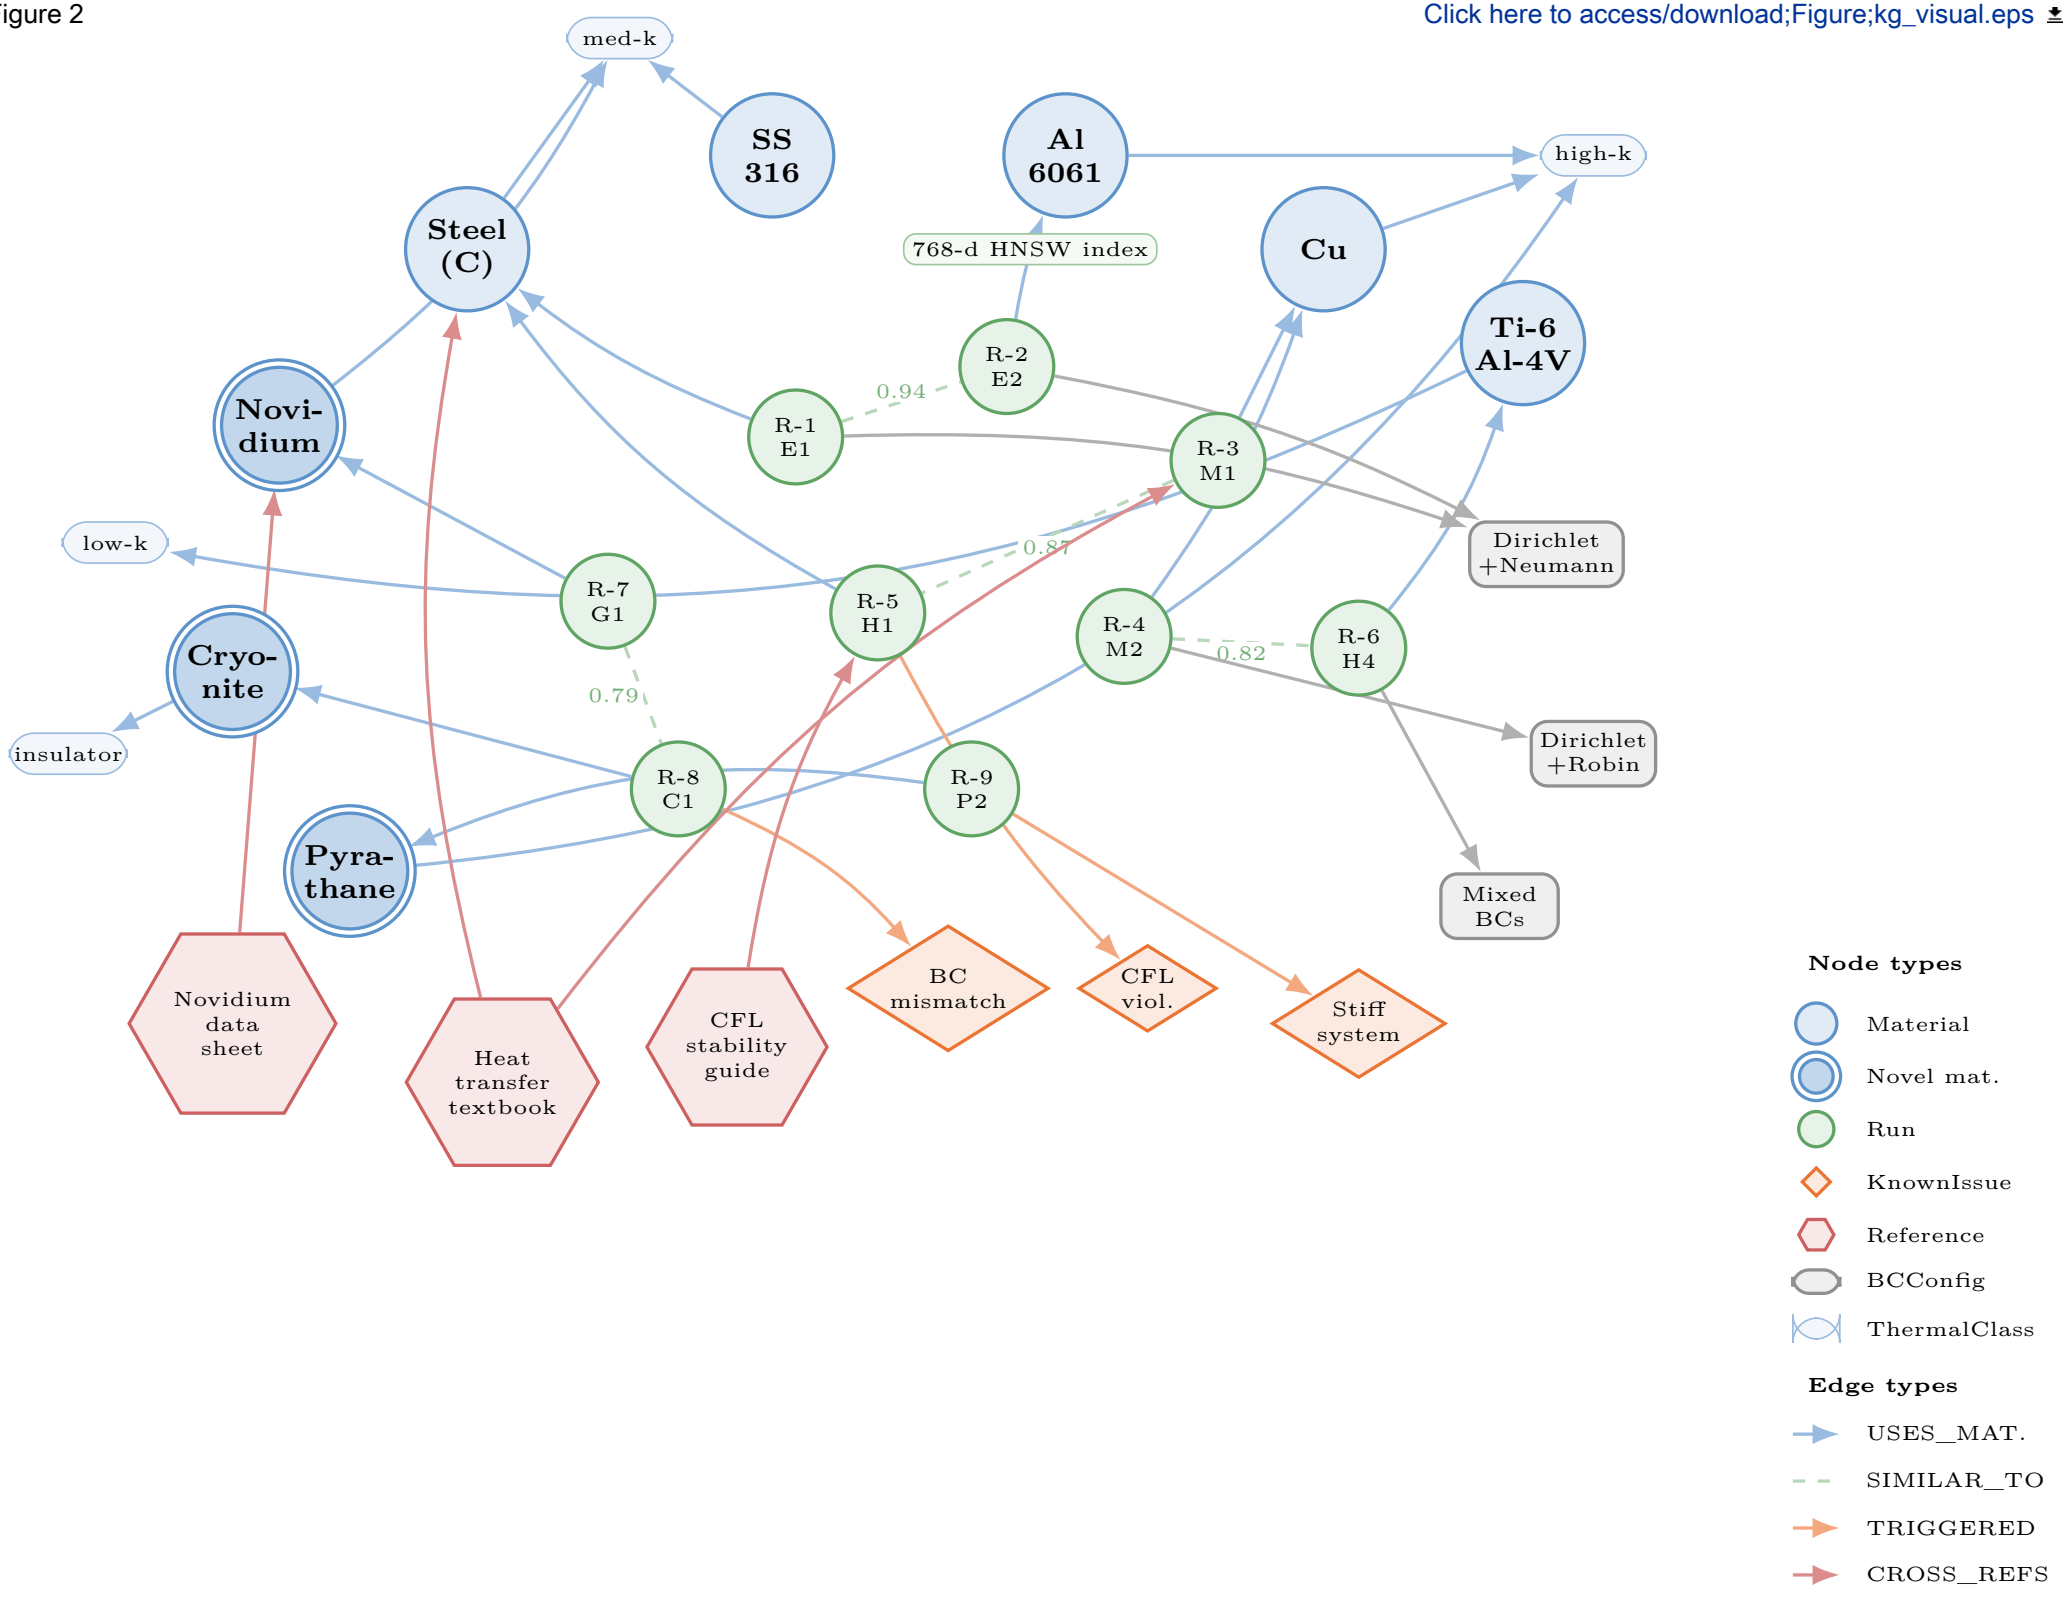

Figure 3

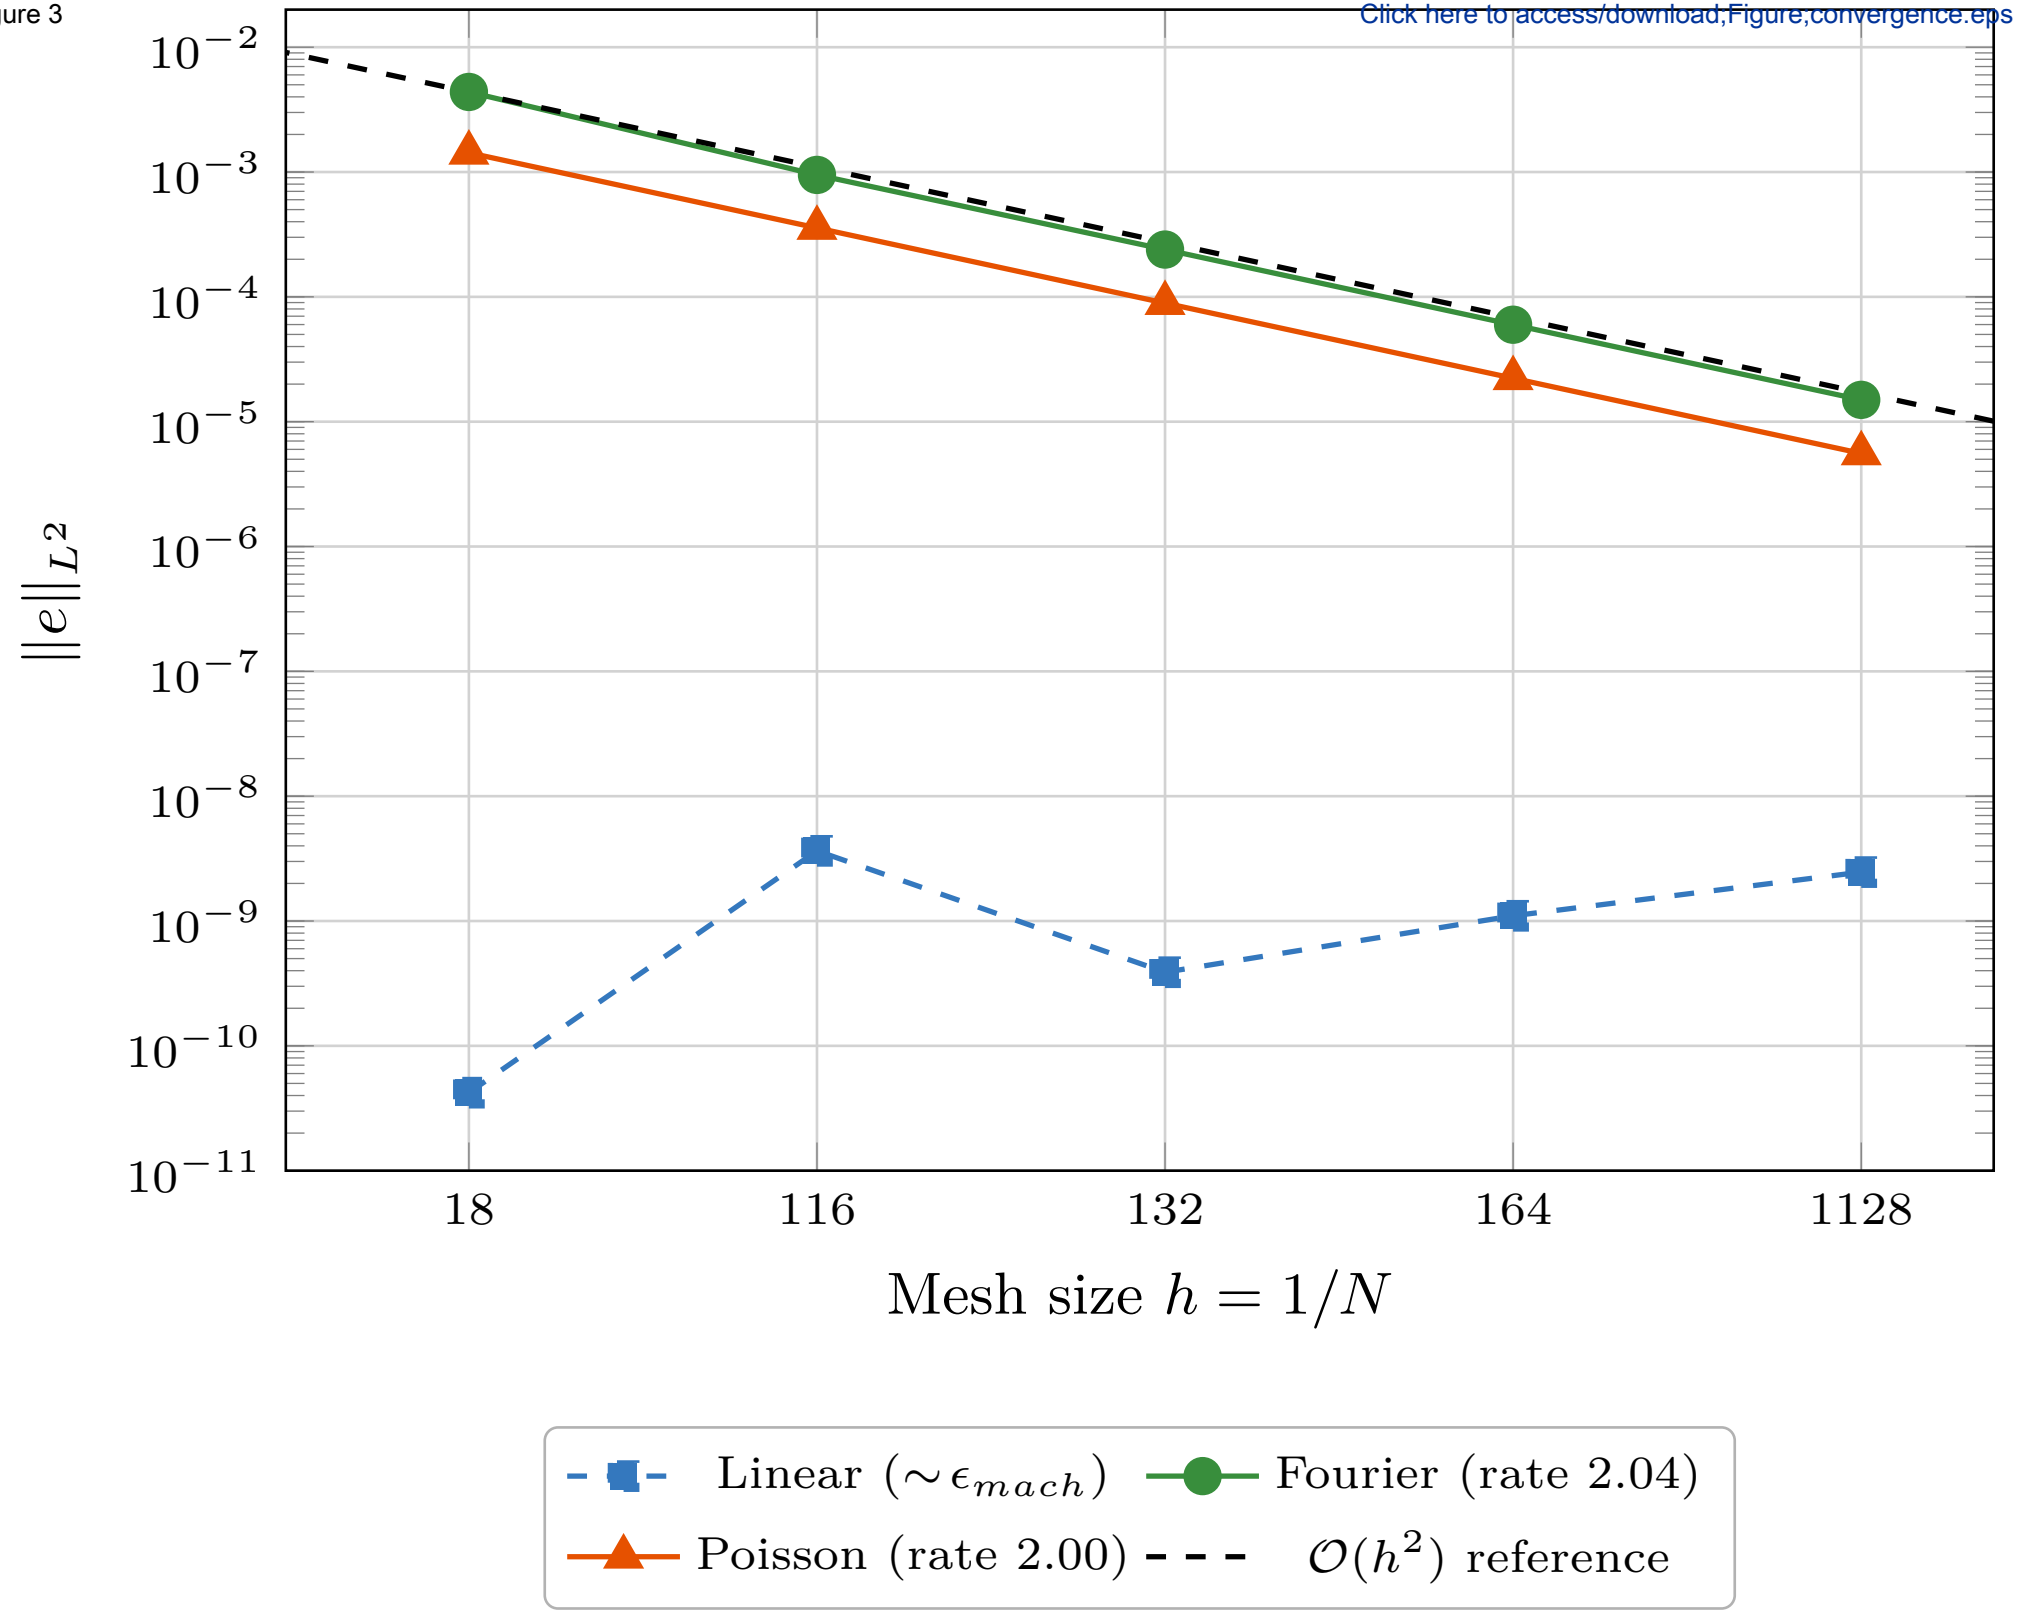

Figure 4

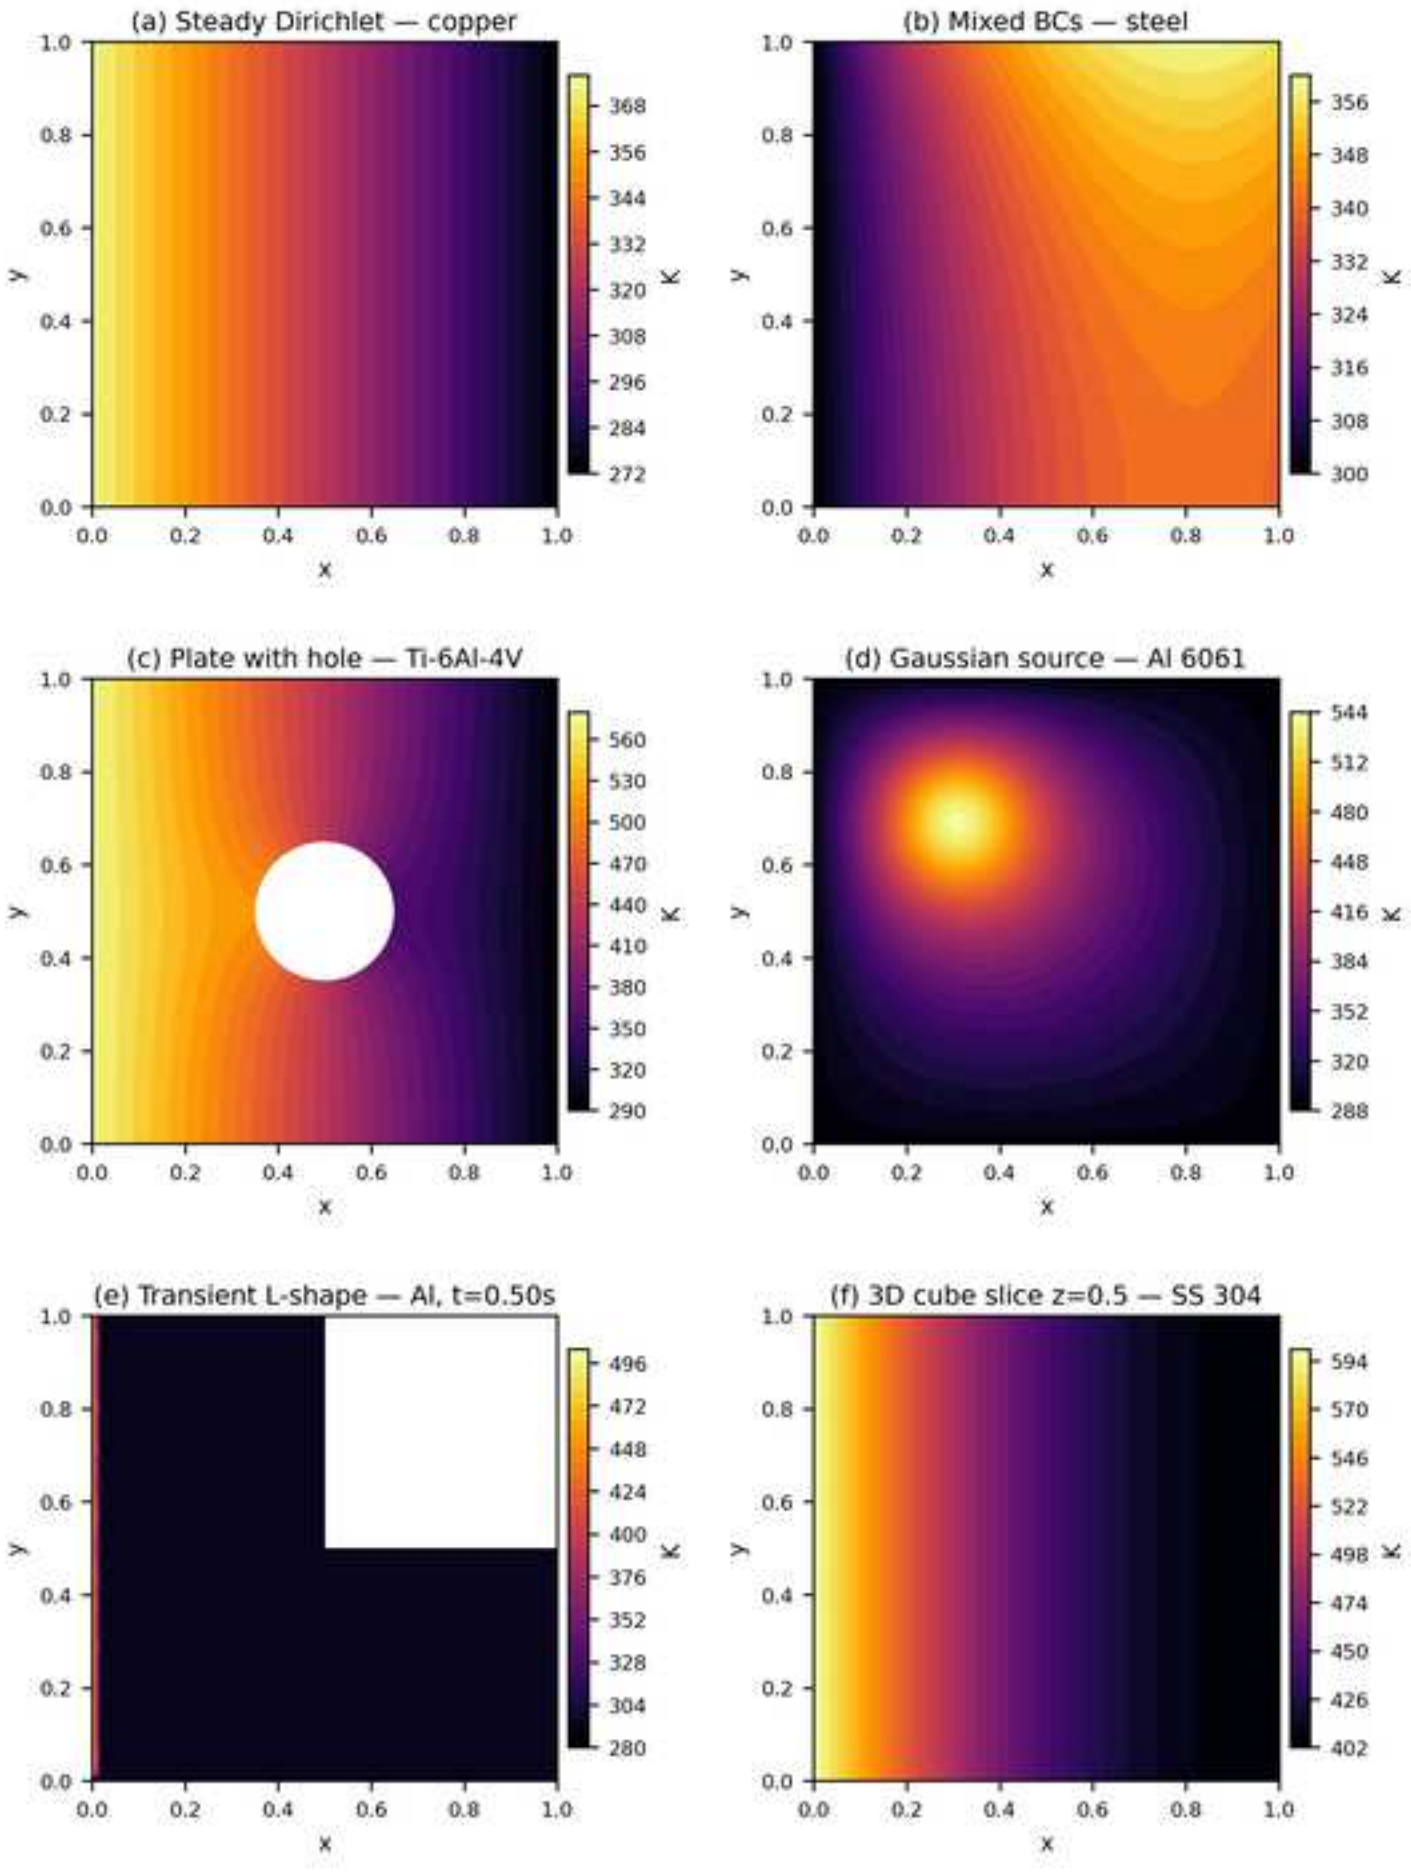

Figure 5

Click here to access/download;Figure;kg_modes.eps

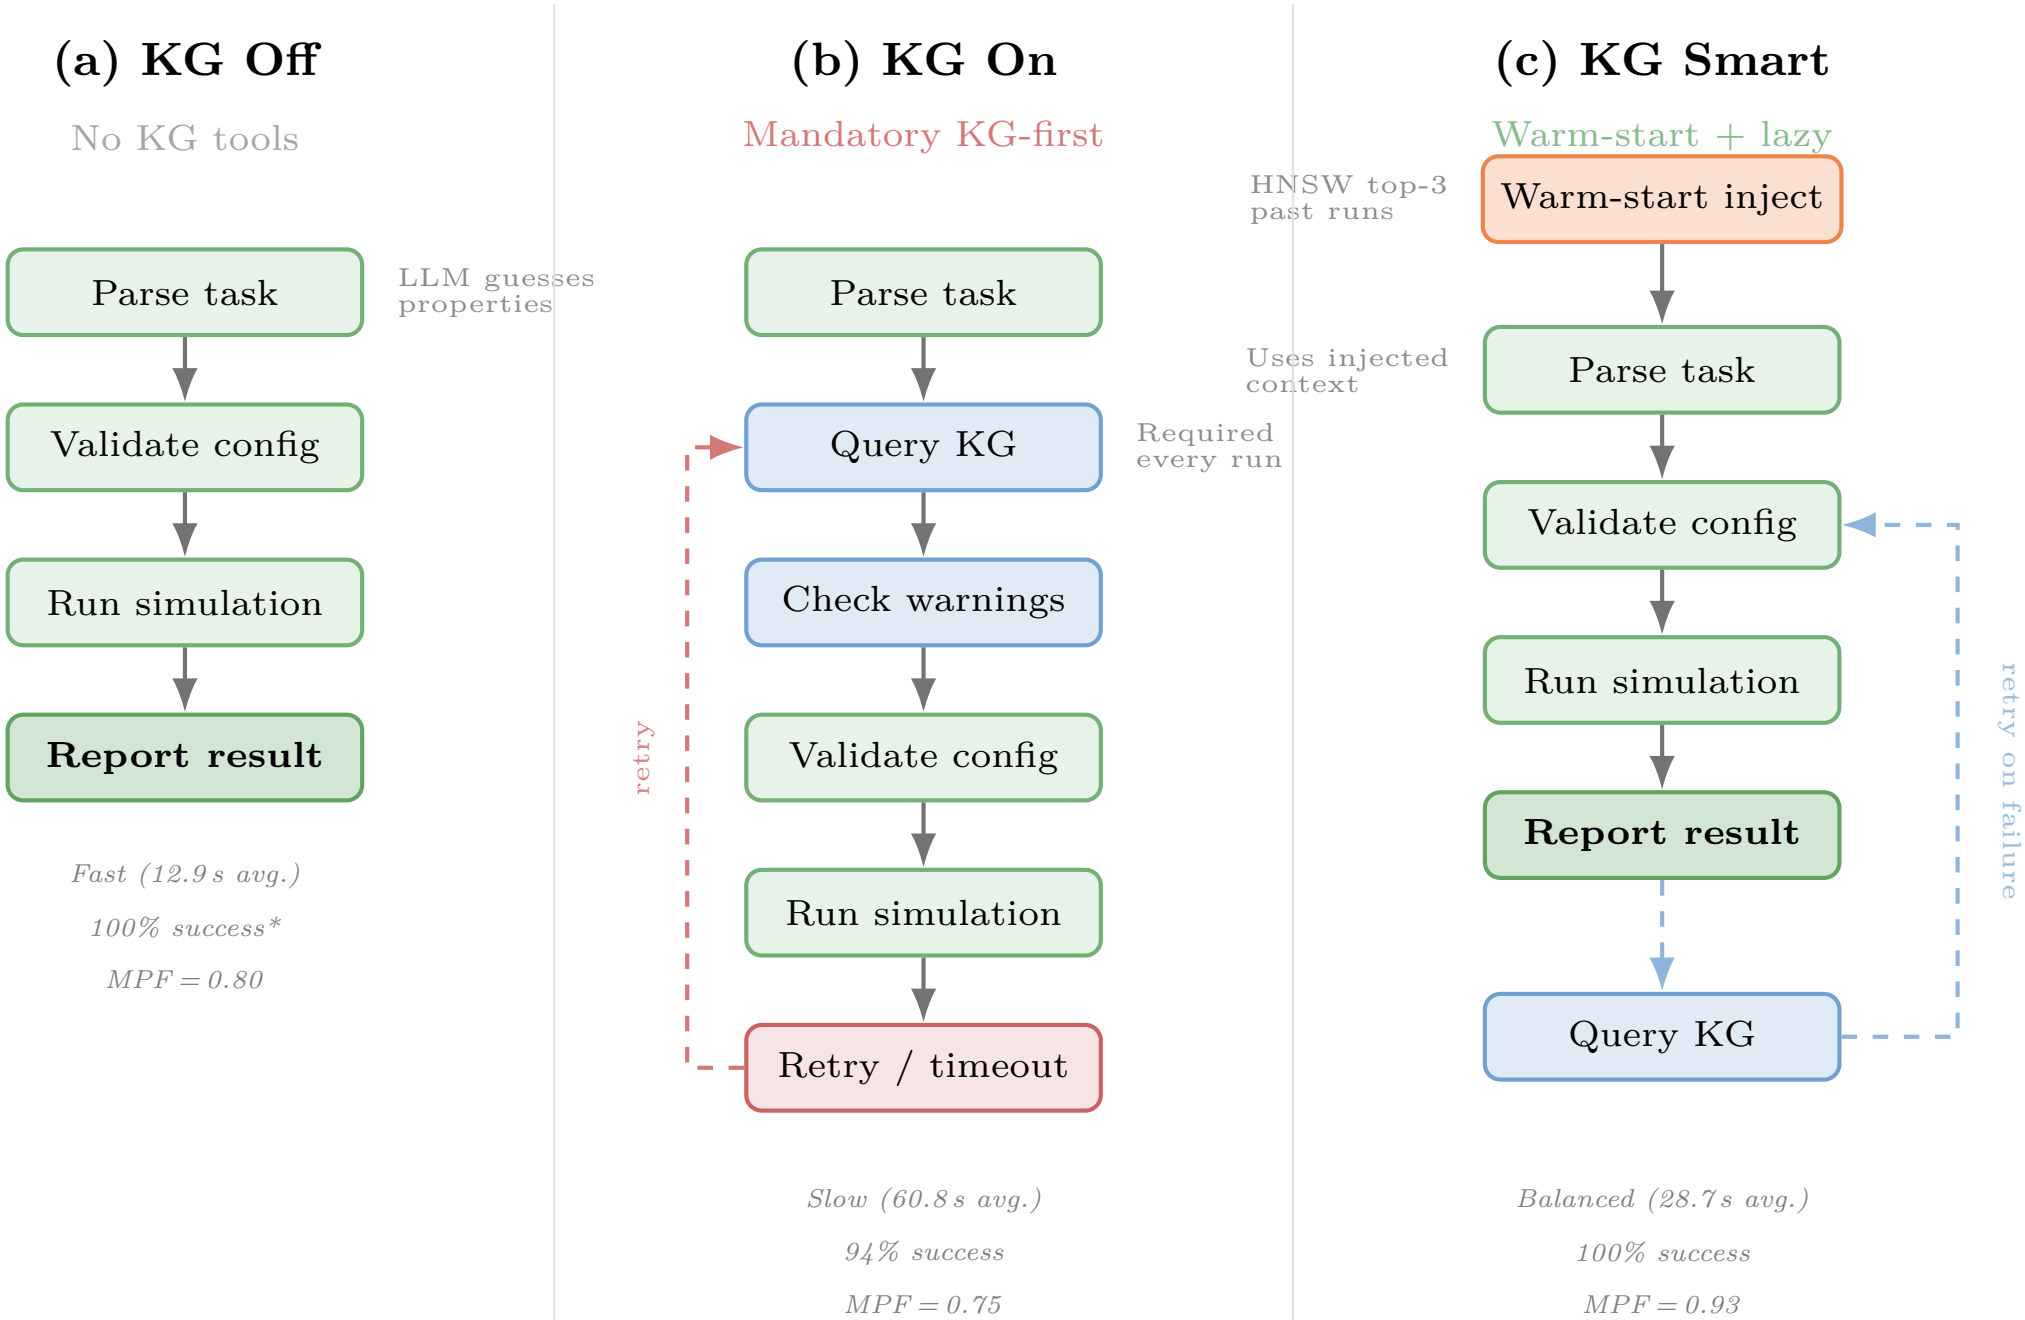

*Fabricates properties for novel materials (novel-task MPF = 0.34). All numbers from the 50-task ablation (tab:ablation).

Figure 6

Click here to access/download;Figure;ablation_bar.eps

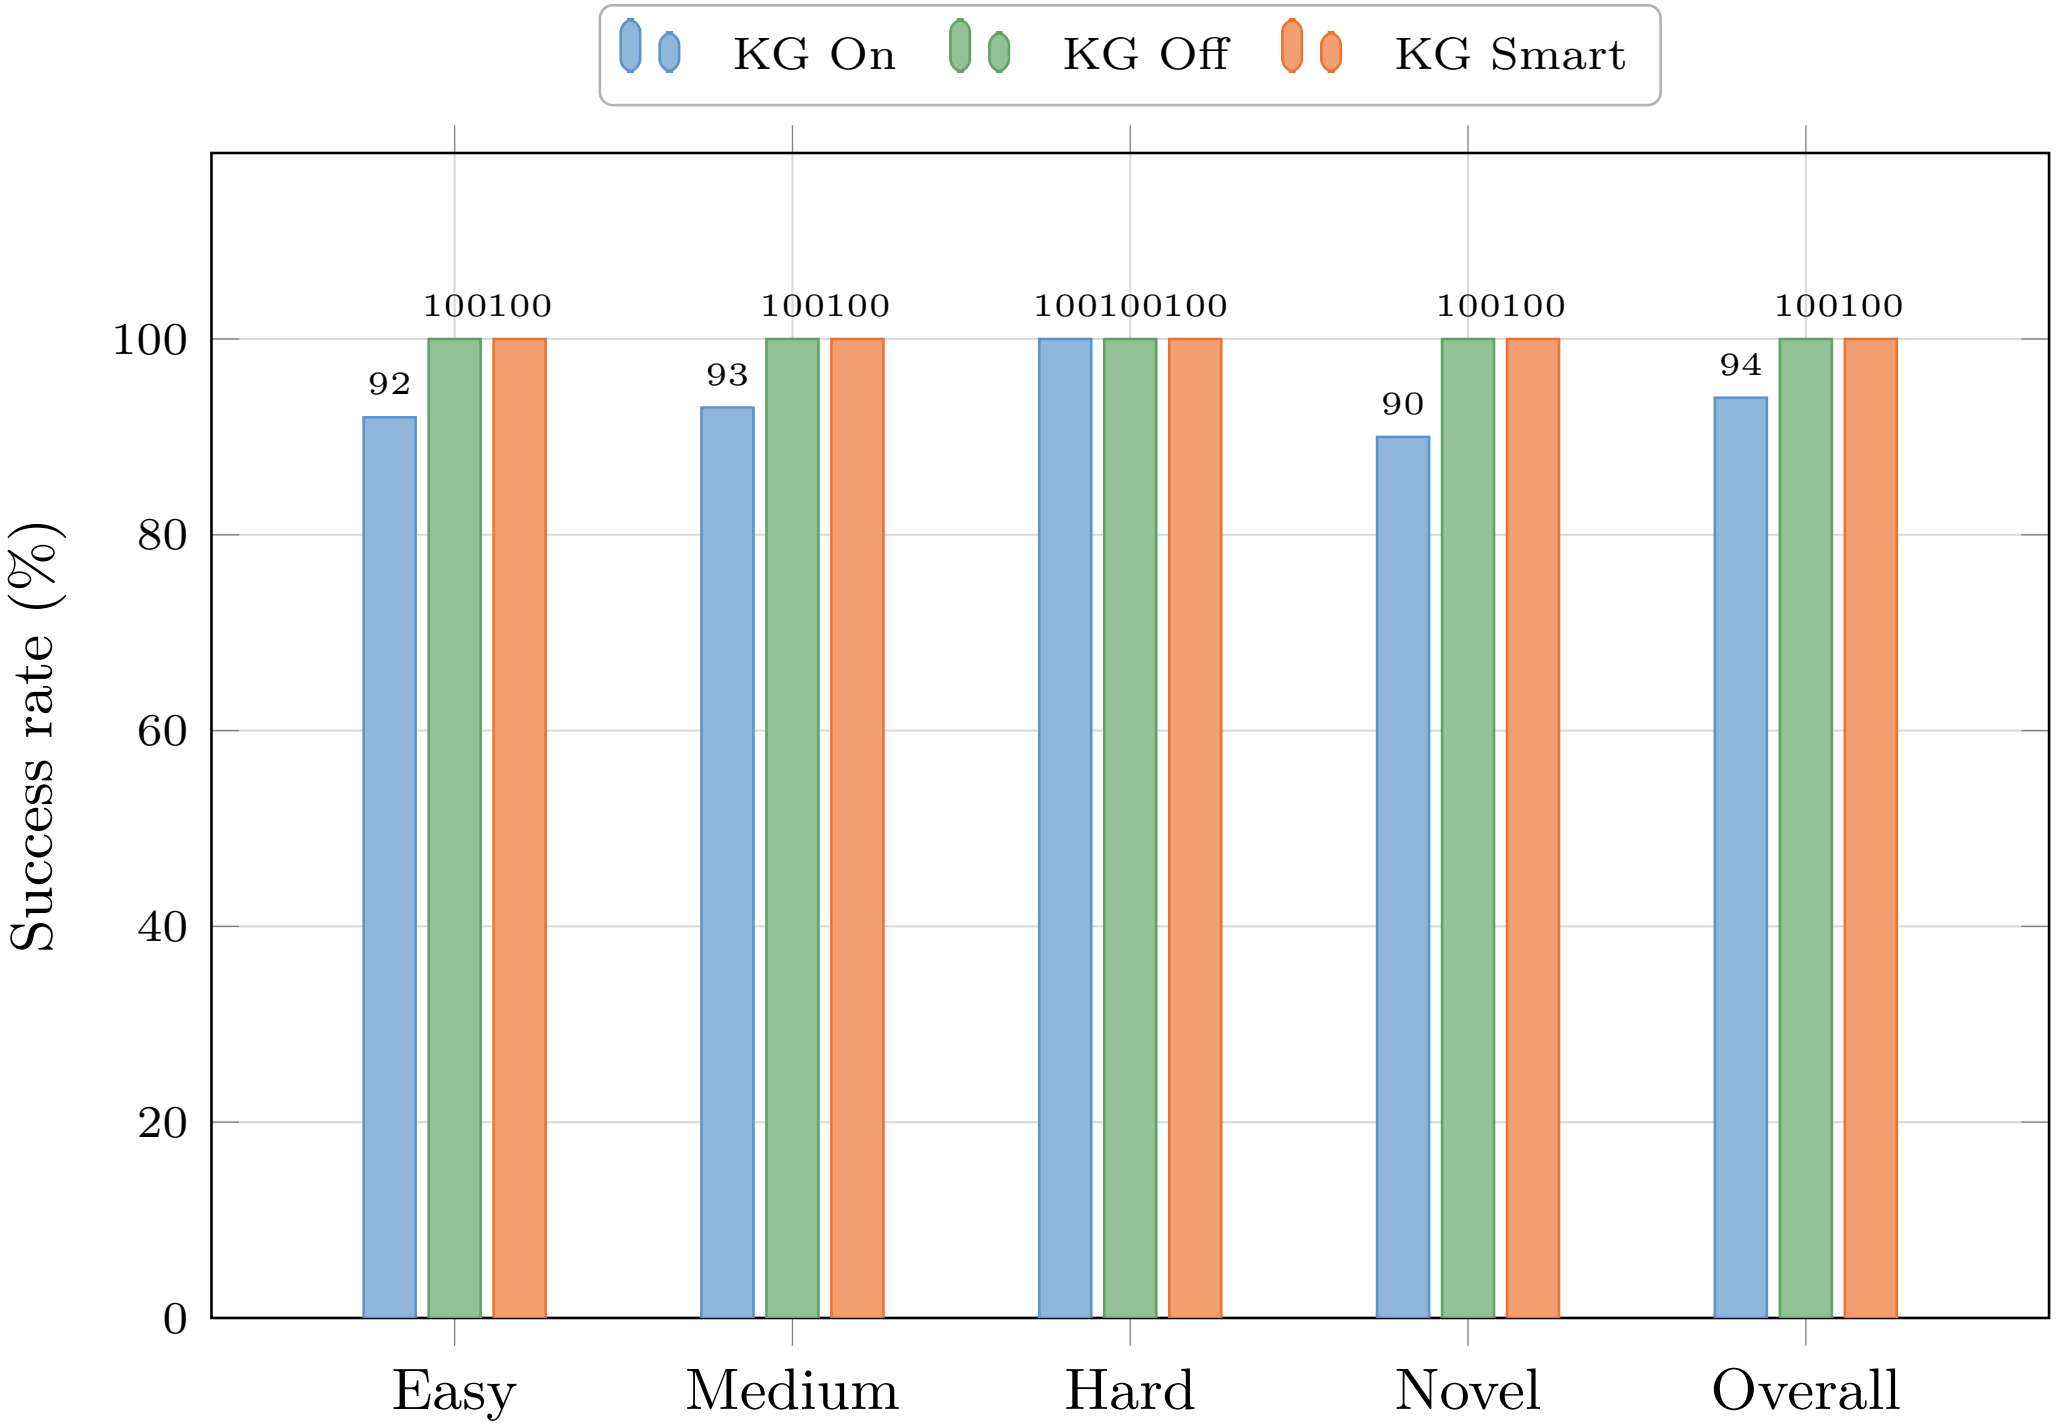

Figure 7

Click here to access/download;Figure;mpf_comparison.eps

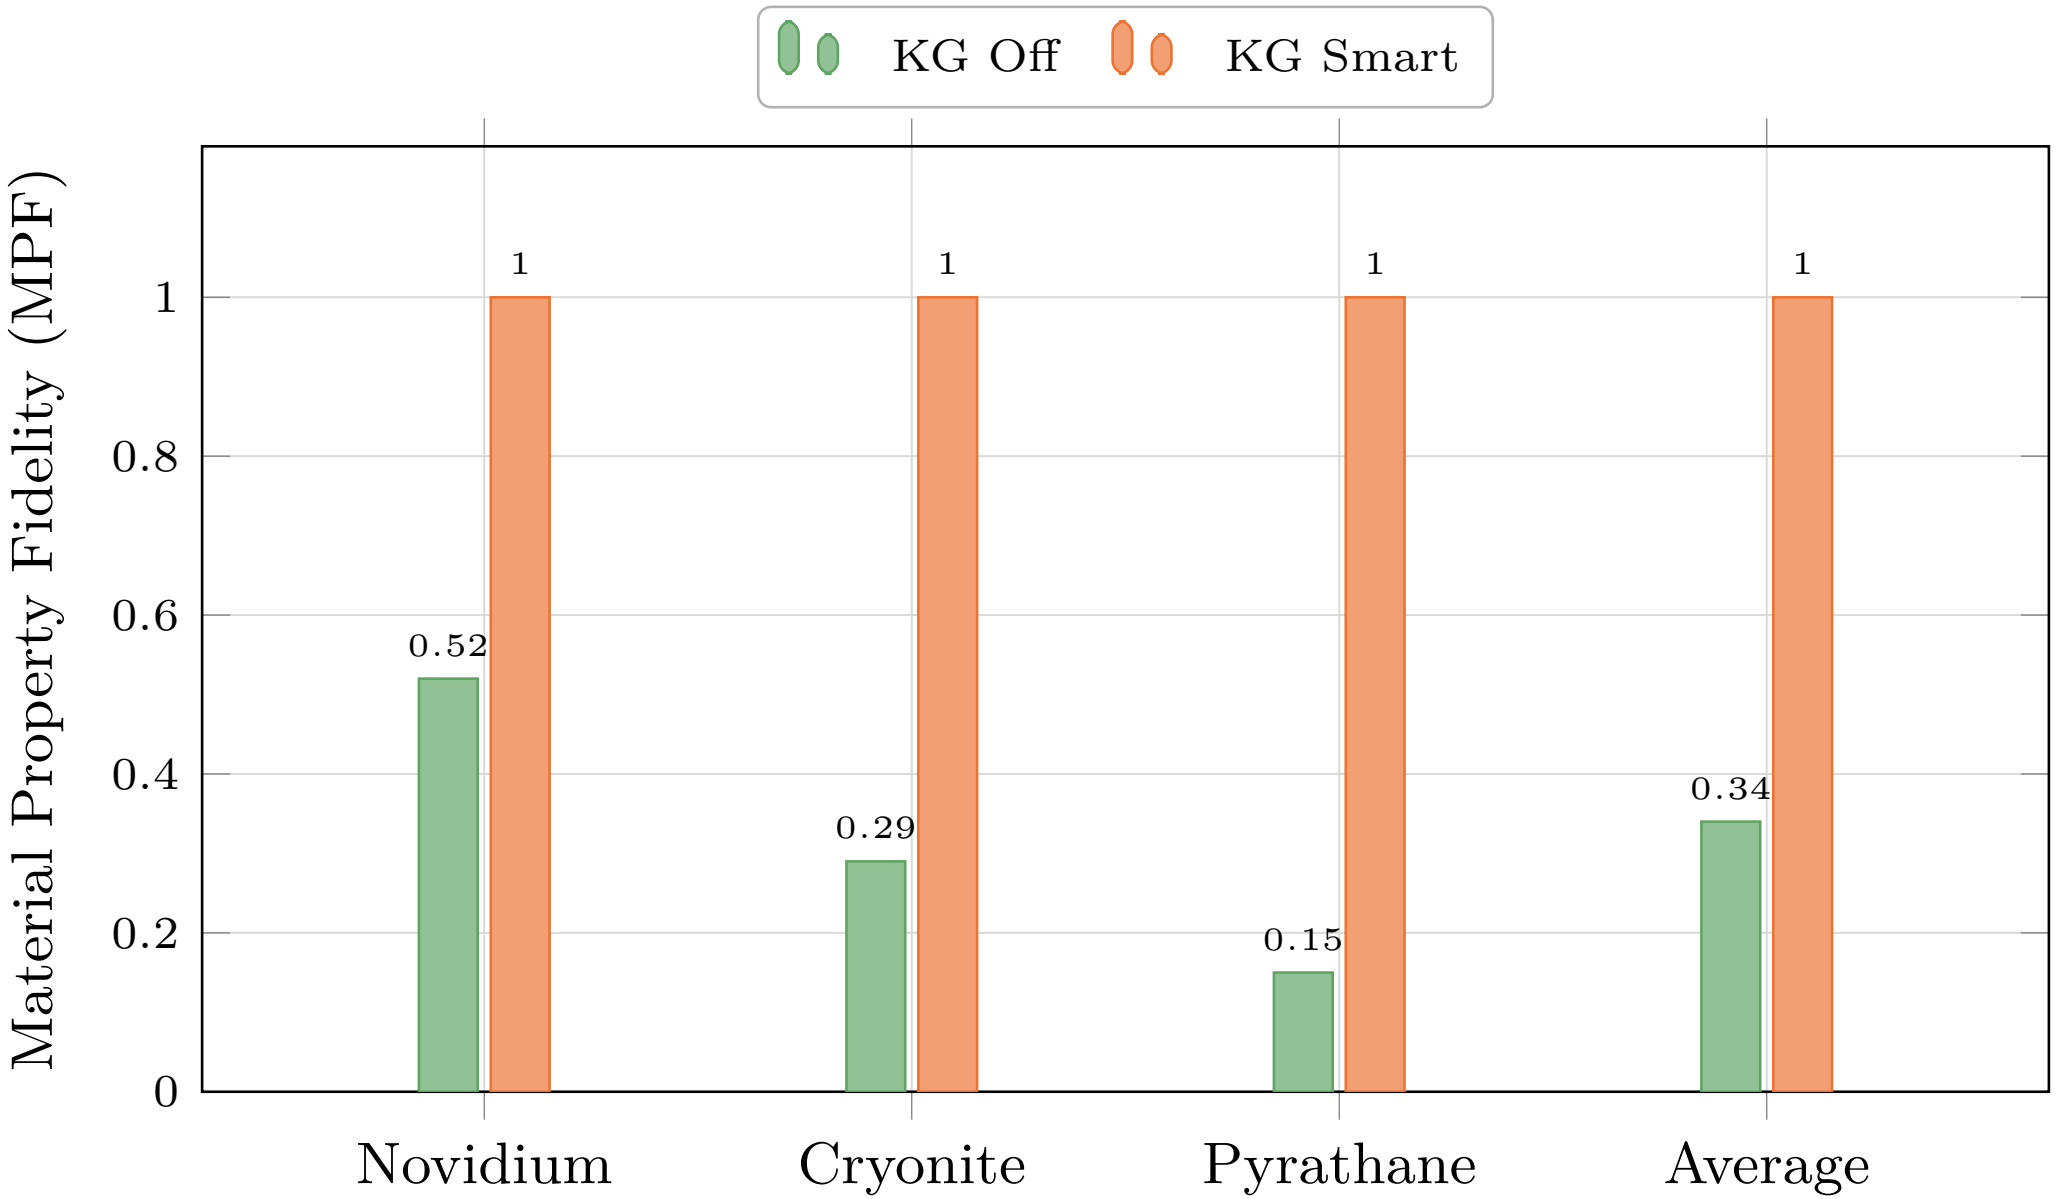

Figure 8

Figure 9

Click here to access/download;Figure;kg_growth.eps