PWR1
POWER SUPPLY (24V)



485 SETTINGS SW2



DESCTIPTION			
COM 1	FAST1	RS485	FAST SLEW RATE
	TERM1		120 OHM TERMINALTION
	BIAS1+		POSITIVE BIAS DATA+
	BIAS1-		NEGATIVE BIAS DATA-
COM 2	FAST2		FAST SLEW RATE
	TERM2		120OHM TERMINALTION
	BIAS2+		POSITIVE BIAS DATA+
	BIAS2-		NEGATIVE BIAS DATA-



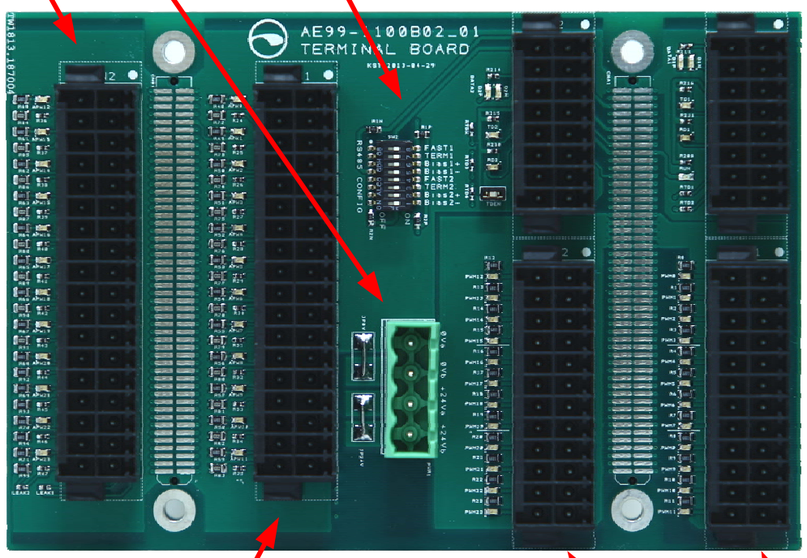

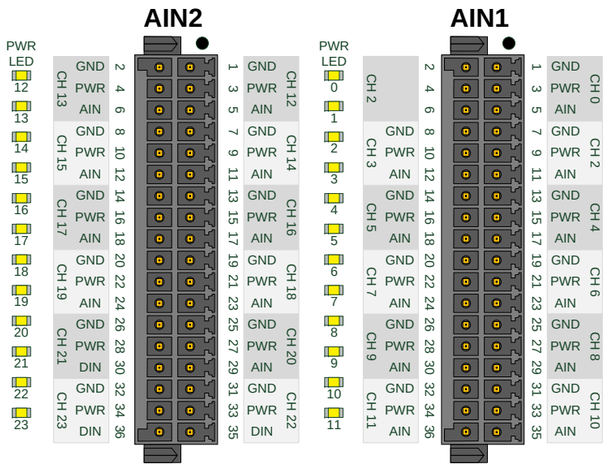

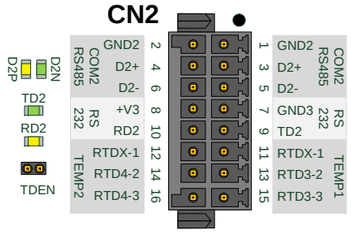







NODE
SW1.1-4

ND8	ND4	ND2	ND1	NODE
OFF	OFF	OFF	OFF	0
OFF	OFF	OFF	ON	1
OFF	OFF	ON	OFF	2
OFF	OFF	ON	ON	3
OFF	ON	OFF	OFF	4
OFF	ON	OFF	ON	5
OFF	ON	ON	OFF	6
OFF	ON	ON	ON	7
ON	OFF	OFF	OFF	8
ON	OFF	OFF	ON	9
ON	OFF	ON	OFF	10
ON	OFF	ON	ON	11
ON	ON	OFF	OFF	12
ON	ON	OFF	ON	13
ON	ON	ON	OFF	14
ON	ON	ON	ON	15

COM FAILURE	FS5
OUTPUTS SWITCHED OFF	OFF
OUTPUTS STATE RETAINS	ON

FS
SW1.5

BD
SW1.6-7

BAUD	BD6	BD7
9600	OFF	OFF
38400	ON	OFF
57600	OFF	ON
115200	ON	ON

COM SETTINGS SW1



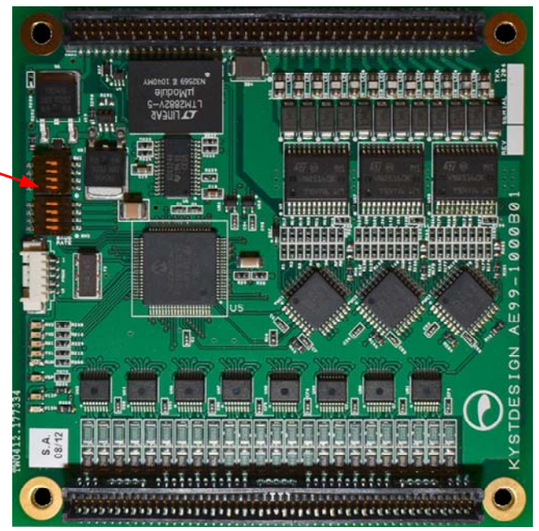

KYSTDESIGN
SUB-SEA TECHNOLOGY

DESCRIPTION General Terminal Board		SIZE A3
		SHEET 1
KYSTDESIGN AS Eikeskogvegen 80, 5570 Aksdal NORWAY Tel +47 52 70 62 50 Fax +47 52 70 62 01 www.kystdesign.no	SHEET NAME Terminal Description	OF 1
	DRAWING FILE NAME AE99-1100B02	REVISION 02