



# Memory Protection

Lecture 8



# Memory Protection

- Memory Protection Unit
  - Privilege Modes
  - Regions
- Memory Management Unit
  - Pages
  - Frames
  - TLB



# Memory Protection

ARM: MPU, RISC-V: PMP





# MPU for RP2040

Protected Memory System Architecture v7 (PMSAv7)




# Bibliography

for this section

**Joseph Yiu**, *The Definitive Guide to ARM® Cortex®-M0 and Cortex-M0+ Processors, 2nd Edition*

- Chapter 12 - *Memory Protection Unit*




# MPU for RP2040

Cortex-M0+ works in three modes

- **handler** mode - *no restrictions* - used while executing ISRs and Exception Handlers
- **thread** mode
  - **privileged** *no restrictions* - usually used for the operating system
  - **unprivileged** mode - *allows only ALU and memory access through Memory Protection* - used for applications

MPU allows 8 regions


- each region has up to 8 subregions
- permissions R W X

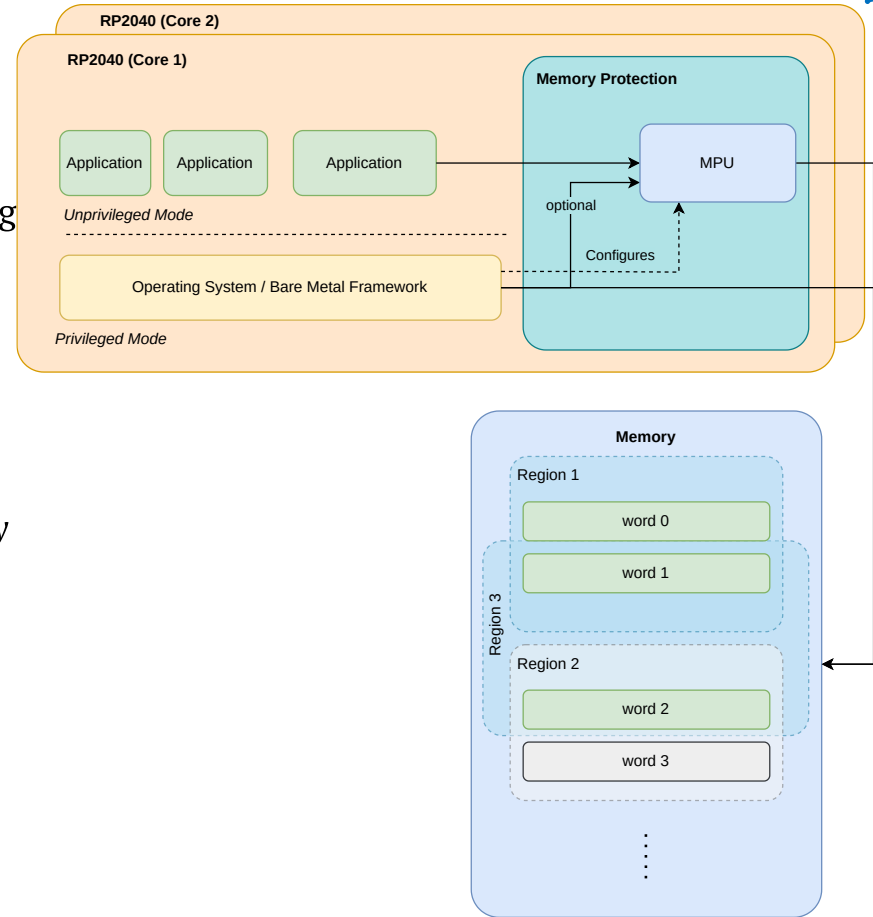



# Memory Protection Unit


Cortex-M MPU (PMSAv7-m)

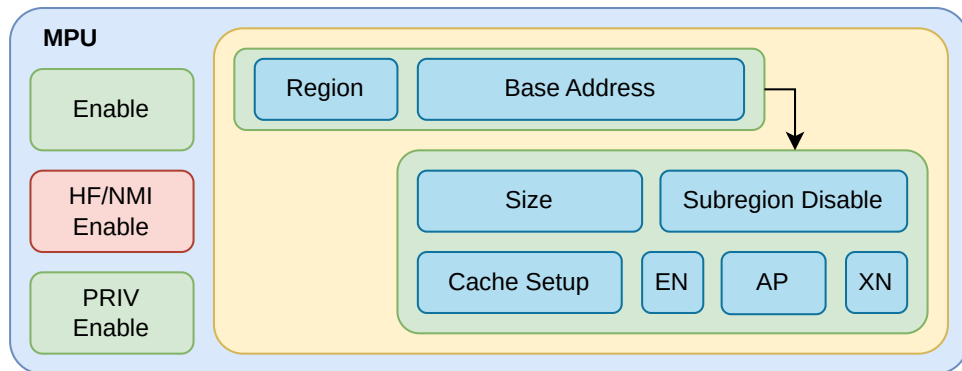

- allows the definition of *memory regions*
- regions can overlap, *highest region number takes priority*
- regions have access permissions (similar to rwx)

$$region\_size = 2^{size}, size \geq 8$$

$$base\_address = region\_size \times N$$

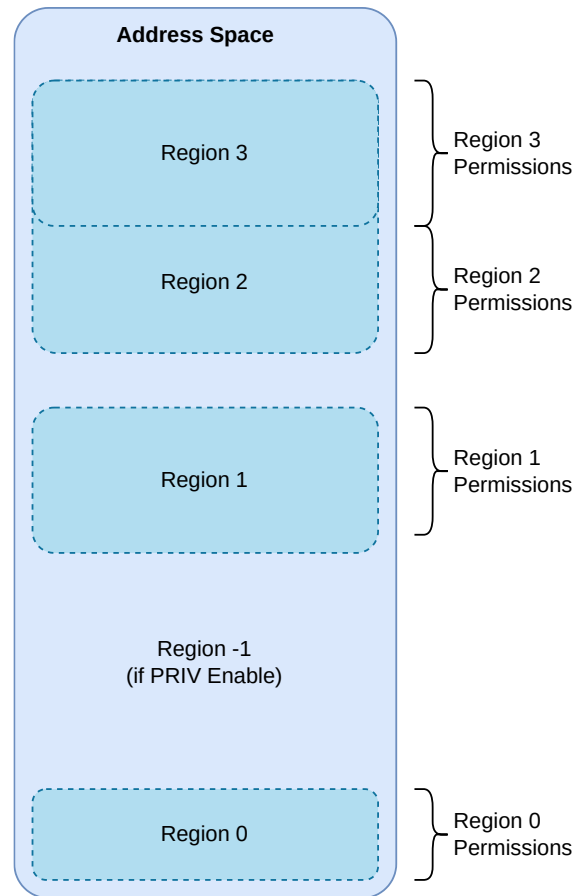






# Memory Protection Unit

## Access Protection

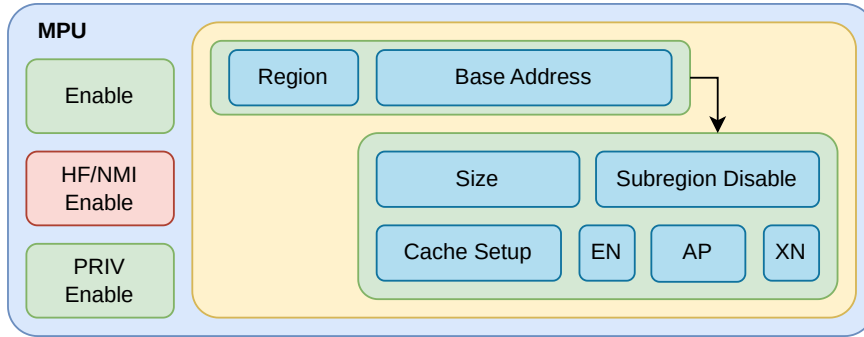

**AP** Access Protection

**XN** eXecute Never



- faults if MCU has to read the next instruction from an *XN* region

AP	Privileged Mode	Unprivileged Mode
000	No Access	No Access
001	Read/Write	No Access
010	Read/Write	Read only
011	Read/Write	Read/Write
100	Do not use	Do not use
101	Read only	No Access
110	Read only	Read only
111	Read/Write	Read only



# Subregions

- each region is divided in 8 subregion
- each bit in **Subregion Disable** disables a subregion
- a disabled subregion triggers a fault if accessed

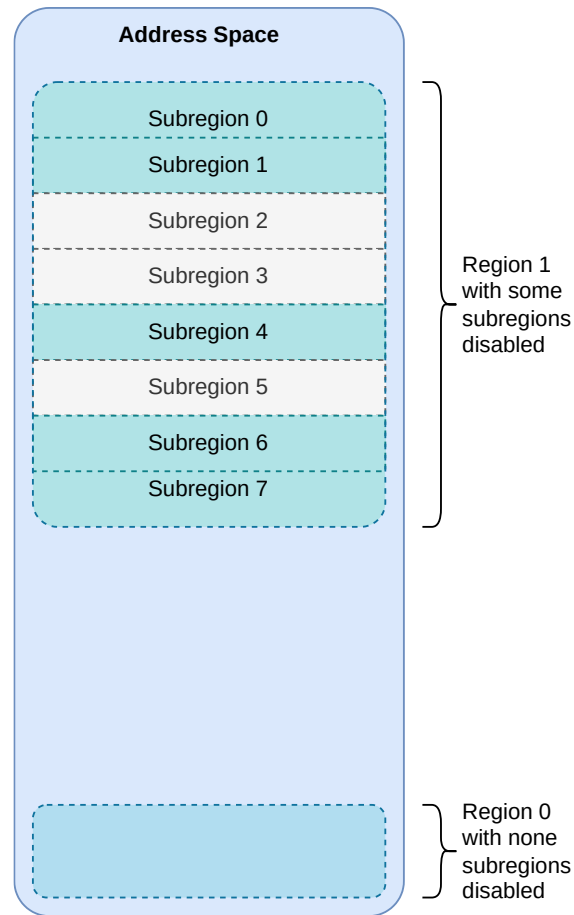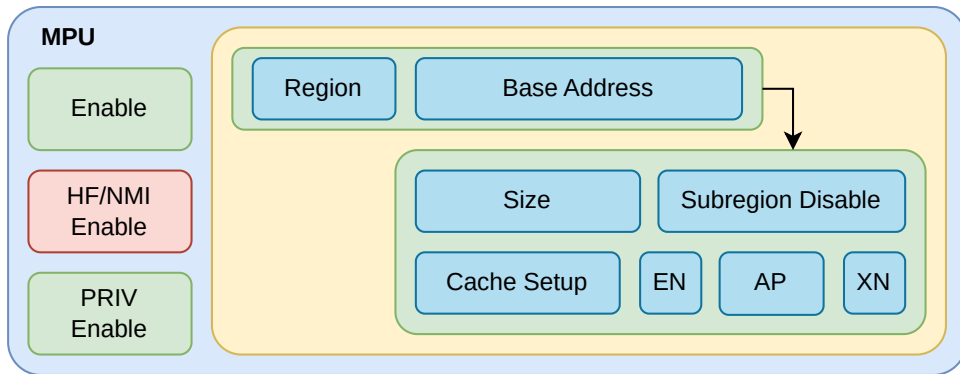



# Subregions' Usage


improve granularity


$$region\_size = 2^{size}, size \geq 8$$

$$base\_address = region\_size \times N$$

$$subregion\_size = \frac{region\_size}{8}$$

- a 5K region is not allowed (5K is not a power of 2)
- use two 4K regions back to back
- disable 6 of the subregions (subregion is 512B)

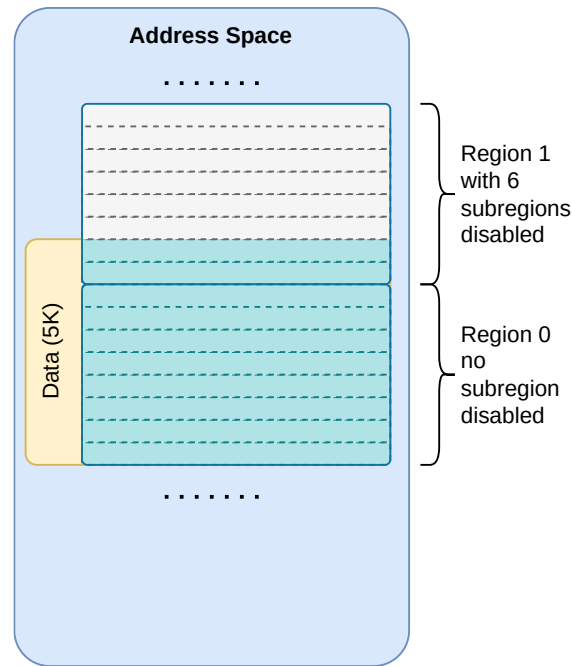



# Memory Layout


protection

## Flash

- **Code** - *read and execute*
- **.rodata** - constants - *read only*
- **.data** - *in flash* - initialized global variables
  - is copied to RAM at startup by the `init` function
  - *should not be accessed after startup*

## RAM

- **stack** - *read and write*
  - *usually protected by unaccessible memory before and after*
- **.data** - *in RAM* - global variables - *read and write*
- **.bss** - global variables (not initialized or initialized to `0`) - *read and write*

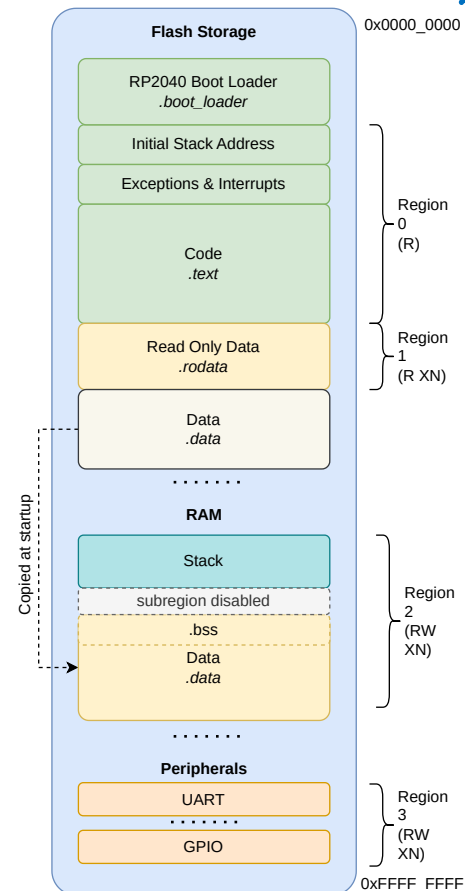

\* drawing is not at scale, code and data are significantly greater than the interrupt vector



# MPU for RP2350

Protected Memory System Architecture v8 (PMSAv8)




# Bibliography

for this section

**Joseph Yiu**, *The Definitive Guide to ARM® Cortex®-M23 and Cortex-M33 Processors*

- Chapter 6 - *Memory System*
  - Subchapter 6.4 - *Access Permission Management*
- Chapter 12 - *Memory Protection Unit (MPU)*





# MPU for RP2350

Cortex-M33 works in three modes

- **handler** mode - *no restrictions* - used while executing ISRs and Exception Handlers
- **thread** mode
  - **privileged** *no restrictions* - usually used for the operating system
  - **unprivileged** mode - *used for applications*, allows only ALU and memory access through:
    - Default Access Permission - *restricts unprivileged access to the Cortex-M Peripherals*
    - Memory Protection

MPU allows 8 regions


- permissions R W X

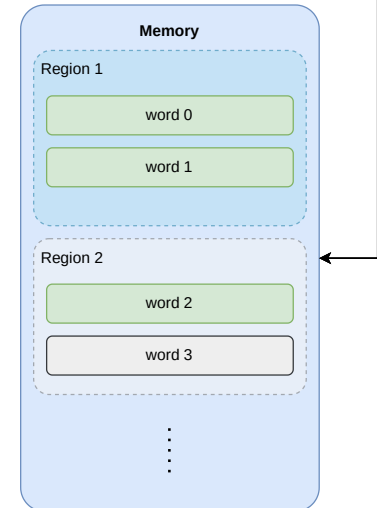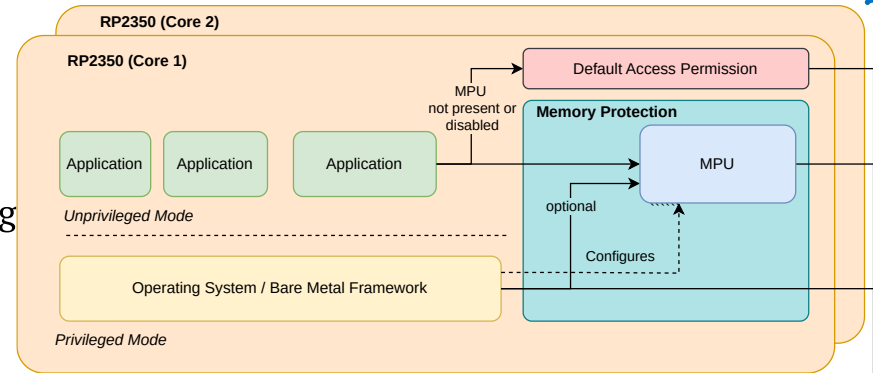



# Memory Protection Unit


Cortex-M MPU (PMSAv8)

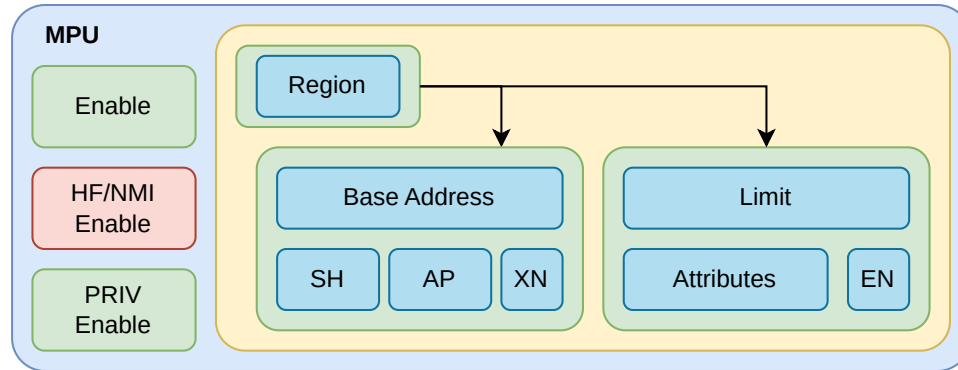

- allows the definition of *memory regions*
- regions cannot overlap
- regions have access permissions (similar to rwx)

$$region\_size = 32 \times N$$

$$base\_address = 32 \times N$$

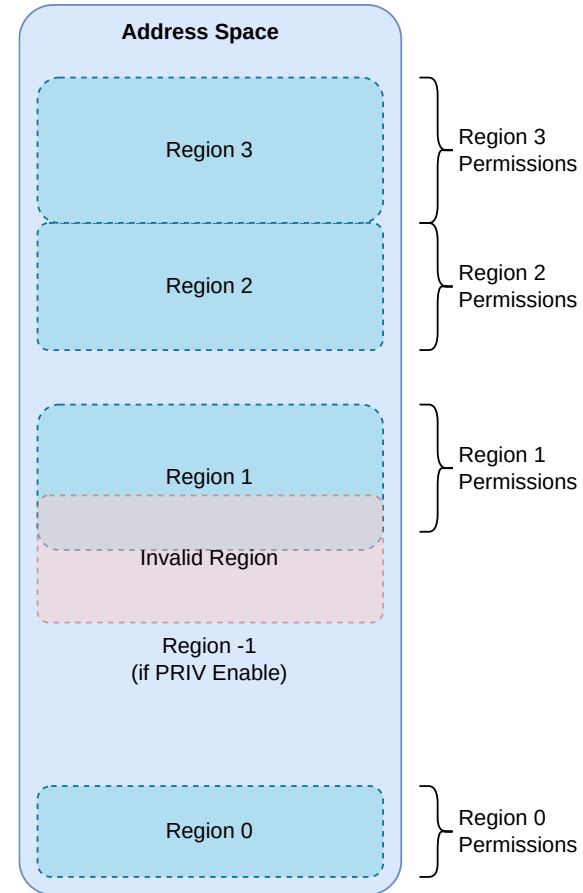






# Memory Protection Unit

## Access Protection

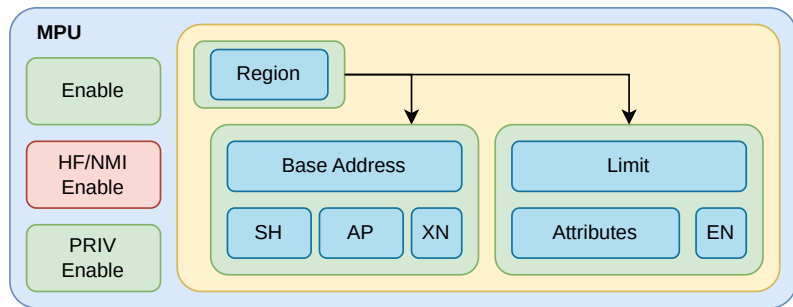

**AP** Access Protection

**XN** eXecute Never

- faults if MCU has to read the next instruction from an *XN* region

**SH** Shared between cores and peripherals

**Attributes** *used for cache*

AP	Privileged Mode	Unprivileged Mode
----	-----------------	-------------------

00	Read/Write	No Access
----	------------	-----------

01	Read/Write	Read/Write
----	------------	------------

10	Read only	No Access
----	-----------	-----------

11	Read only	Read only
----	-----------	-----------

Better granularity -> there is no need for *No Access* in privileged mode.

There is no need to overlap regions to obtain the required protected memory space.



# Memory Management

MMU



# Bibliography


for this section

1. **Andrew Tanenbaum**, *Modern Operating Systems (4th edition)*

- Chapter 3 - *Memory Management*
  - Subchapter 3.3 - *Virtual Memory*

2. **Philipp Oppermann**, *Writing an OS in Rust*

- *Introduction to Paging*
- *Paging Implementation*




# Memory Management


memory access defined page by page

- uses *logical addresses*
- **translates** to *physical addresses*

The processor works in at least two modes:

- **supervisor mode**
  - restricts access to some registers
  - accesses virtual addresses through Memory Protection (*if machine mode exists*)
- **user mode**
  - allows only ALU and memory load and store
  - accesses memory access through the Memory Management Unit (*MMU*)

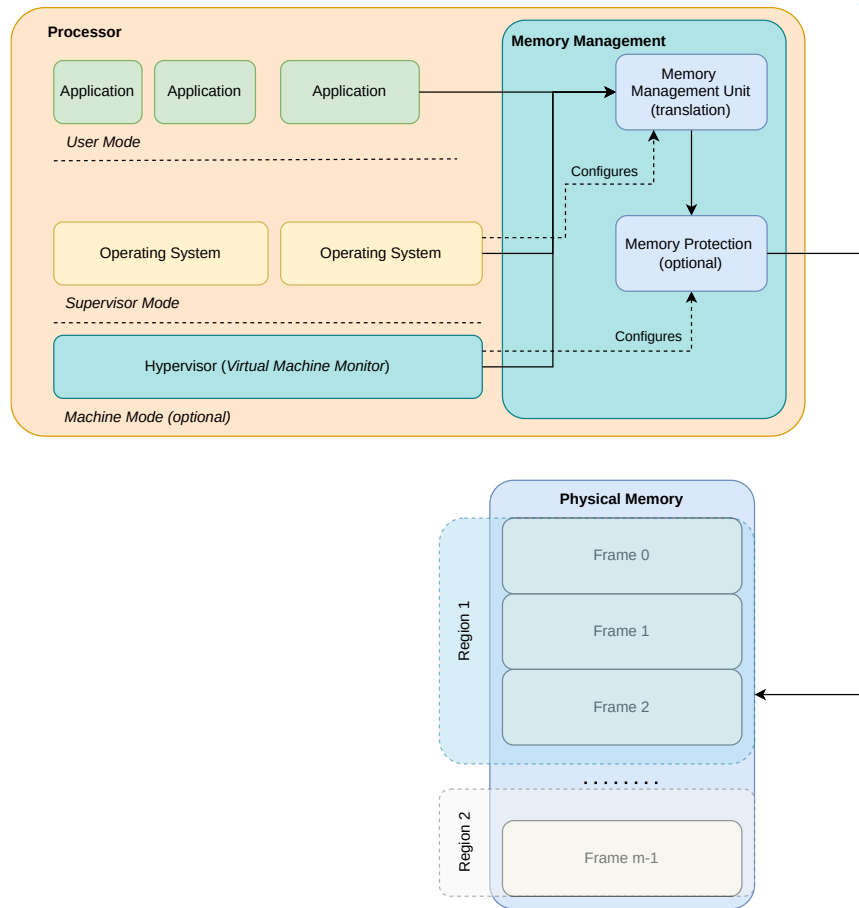



# Paging


the memory *unit* is the page


- Physical Memory (*RAM*) is divided in **frames**
- Logical Memory is divided in **pages**
- $page = frame = 4 \text{ KB}$  (usually)

*logical addresses* are translated to *physical addresses* using a **page table**

the **page table** is located in the **physical memory**

- each memory access requires at least 2 memory accesses

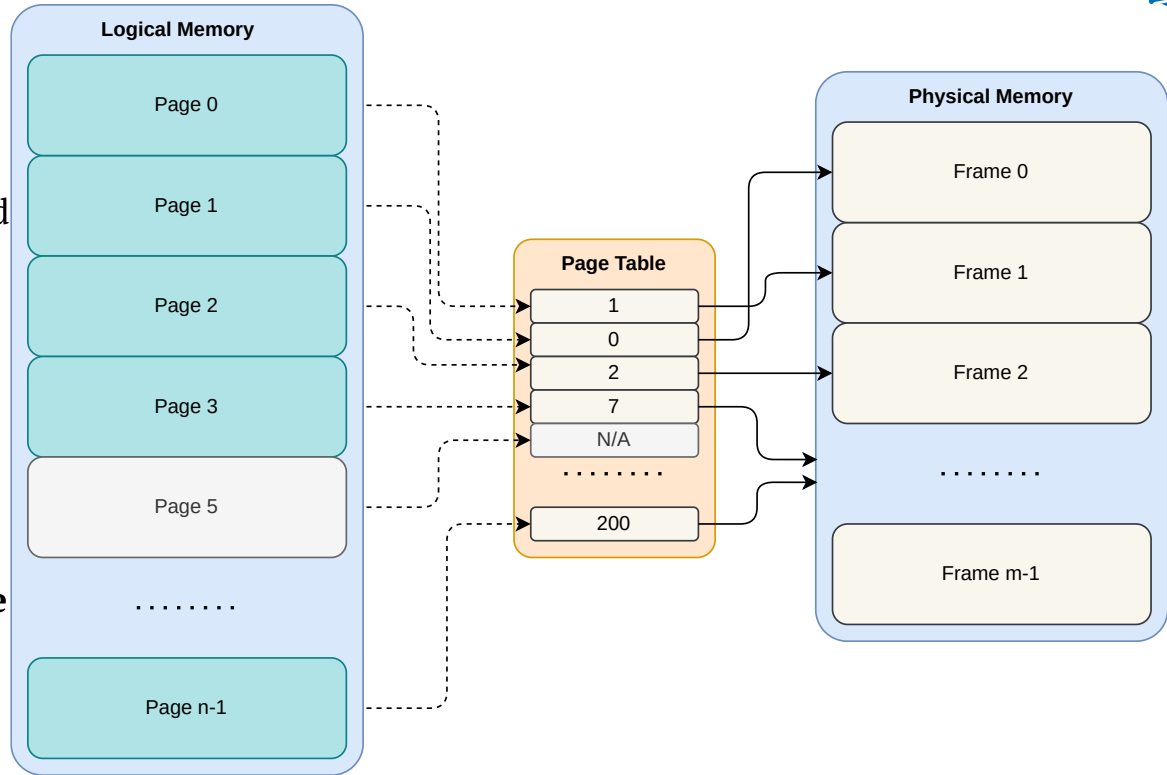




# Address Translation

page to frame

the logic address is divided in two parts:

- *page index*
- *offset* within the page

the MMU translates every logic address into a physical address using a *page table*

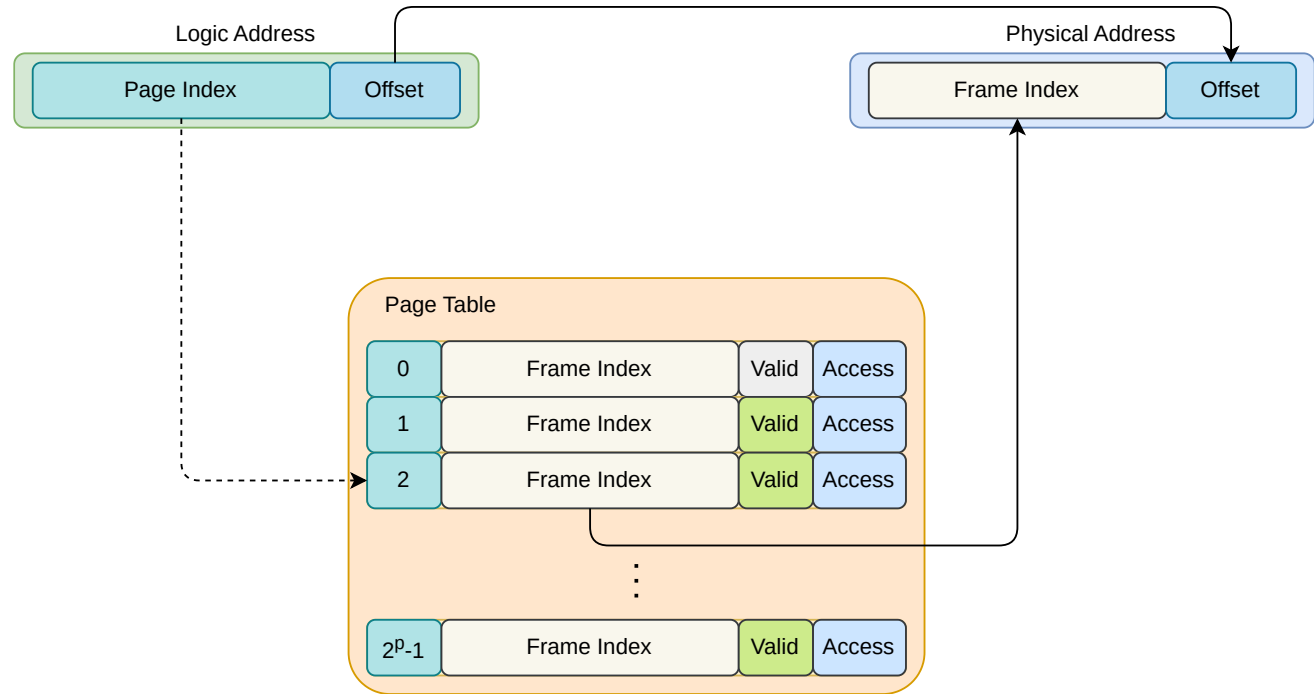




# Translation Lookaside Buffer (TLB)

caching address translation

the **page table** is stored in **RAM**

each memory access **requires 2 accesses**

1. read the page table entry to translate the address
2. the requested access

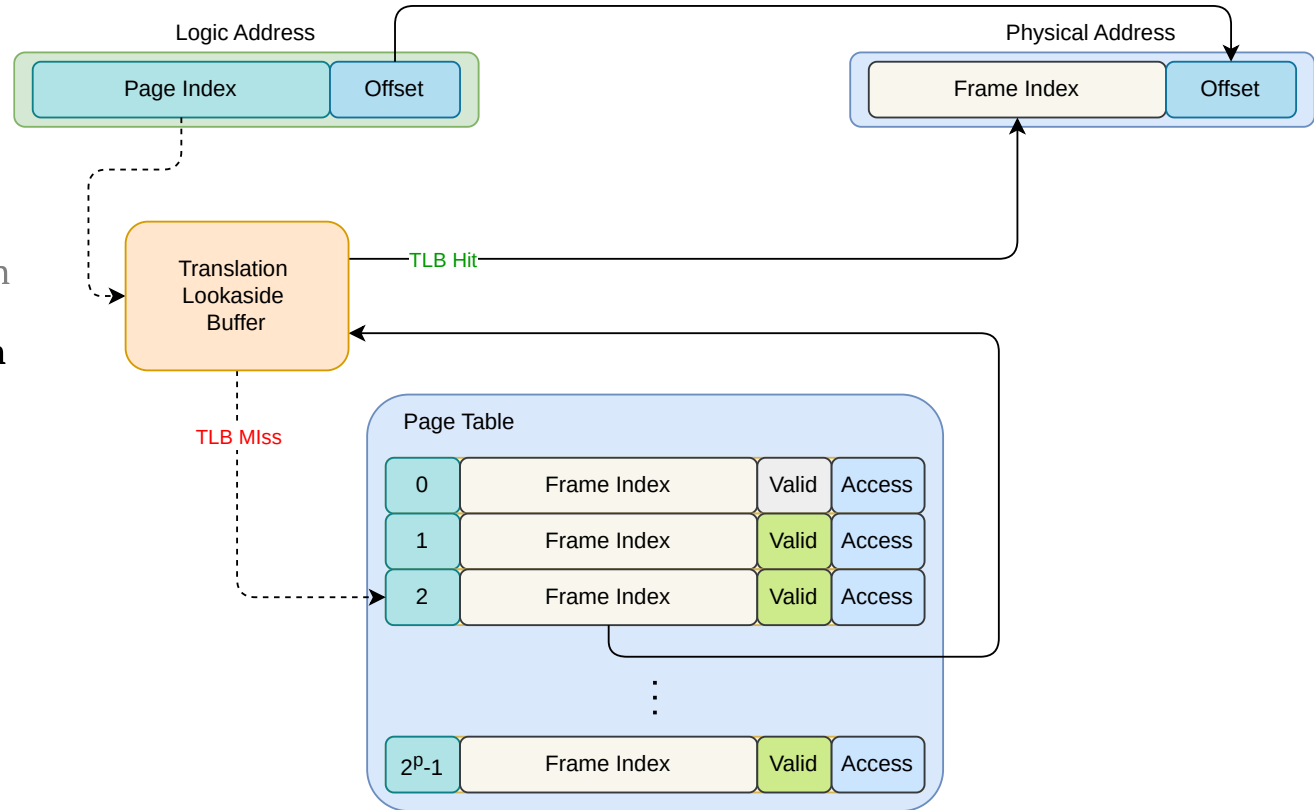



# Page Directory

caching address translation


$$size_{table} = \frac{size_{ram}}{size_{page}}$$

- each table entry is 4B
- the address space is 4GB  
(for 32 bits processors)

$$size_{table\_32\_bits} = \frac{2^{32}}{4 \times 2^{10}}$$

$$size_{table\_32\_bits} = 4MB$$

RAM was counted in MB  
when paging started being  
used

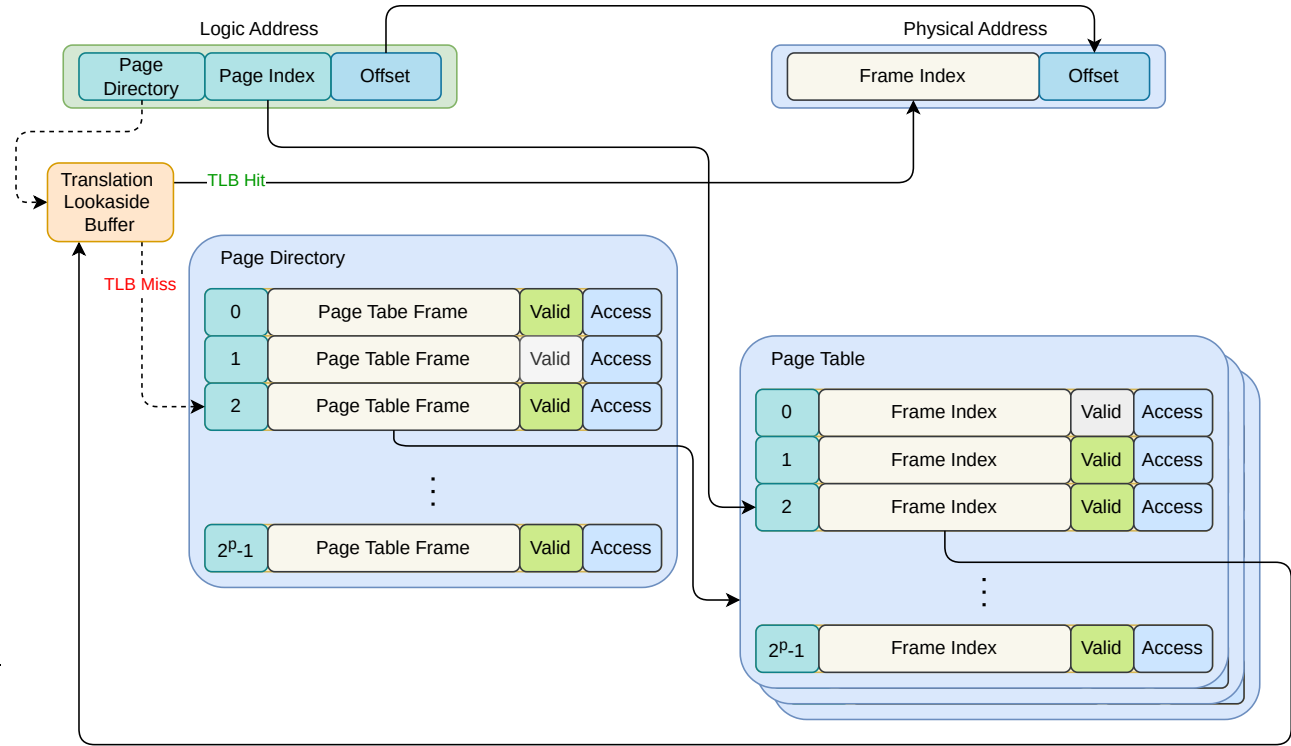

two levels, page directory and table, usually used for 32 bits systems







# Page Table Entry

for x86 - 32 bits

this is one entry of the page table

- **P** - is the page's frame present in RAM?
- **R/W** - read only or read write access
- **U/S** - can the page be accessed in user mode?
- **D** and **A** - has this page been written since the OS has reset these bits?
- **AVL** - bits available for the OS to use, ignored by MMU

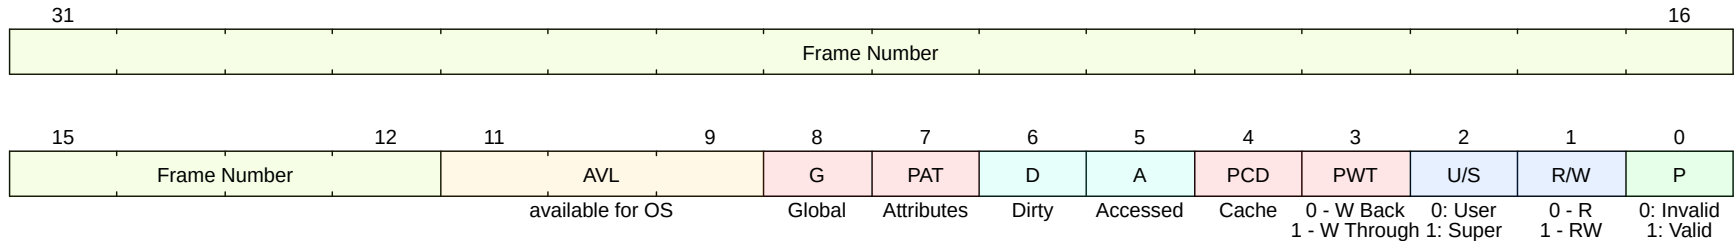




# Page Table Entry

for x86 - 32 bits with PAE

this is one entry of the page table using Physical Address Extension (*PAE*)

- **XD** - eXecute Disable (aka *DEP*), if set triggers a fault if an instruction is read from the page
- **PK** - Protection Keys, allows user mode to set protection (64 bit only)

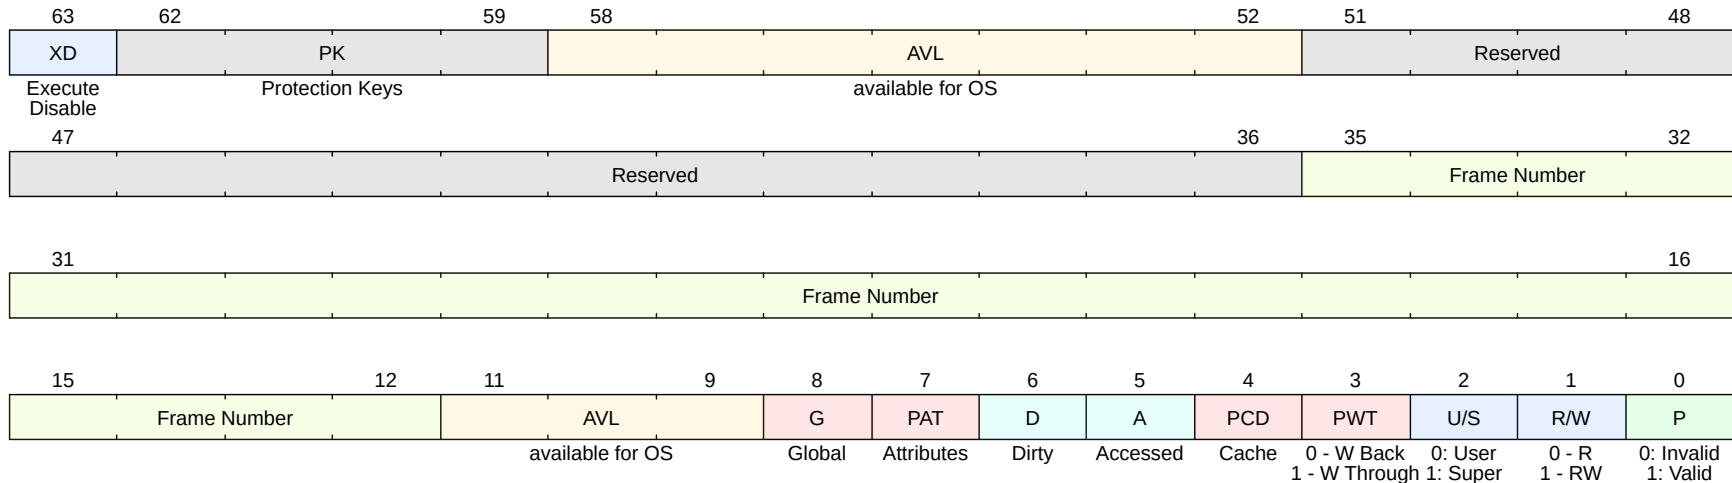




# Microcontroller (MCU)

Integrated in embedded systems for certain tasks


- low operating frequency (MHz)
- a lot of I/O ports
- controls hardware
- does not require an Operating System
- costs \$0.1 - \$25
- uses **Memory Protection Unit**

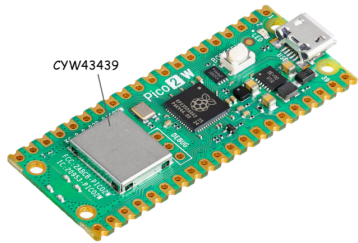

# Microprocessor (CPU)

General purpose, for PC & workstations

- high operating frequency (GHz)
- limited number of I/O ports
- usually requires an Operating System
- costs \$75 - \$500
- uses **Memory Management Unit**

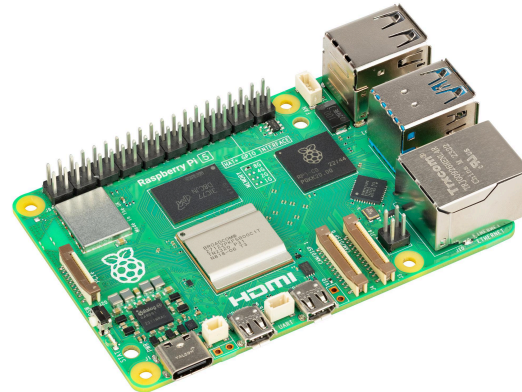



# Conclusion

we talked about

- Memory Protection Unit
  - Privilege Modes
  - Regions
- Memory Management Unit
  - Pages
  - Frames
  - TLB