ELARA-SH-01 Long wall bar, DC-input notch

Quantity per shield: 1 Material: aluminium 6061-T6 bar (EN AW-6082-T6 is fine too) ELARA antenna-amplifier shield, rev 0.2 (generated by mechanical/jlccnc.py)

FRONT (looking at face v = 0; PCB face w = 0 at the bottom)

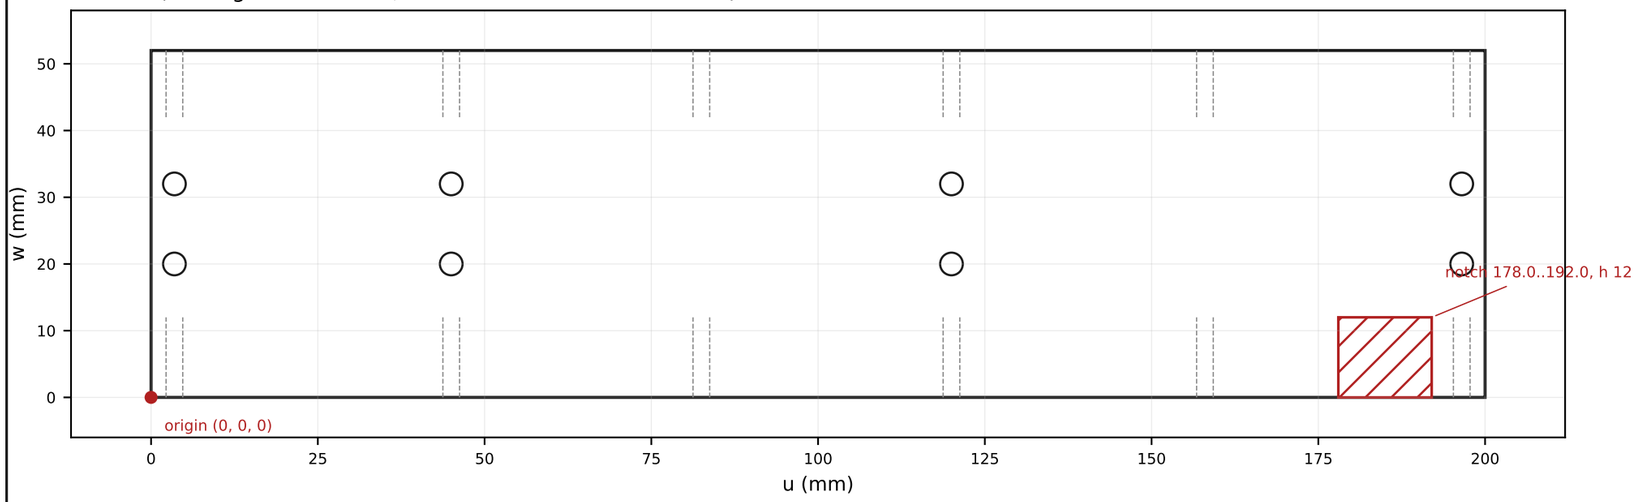

END (face u = 0)

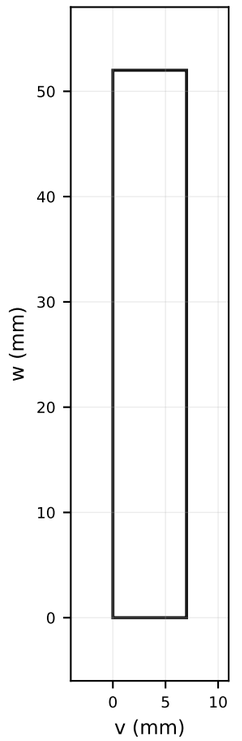

Stock size 200 x 7 x 52

12 tapped holes M3

TOP / BOTTOM (vertical taps from both faces at the same u, v)

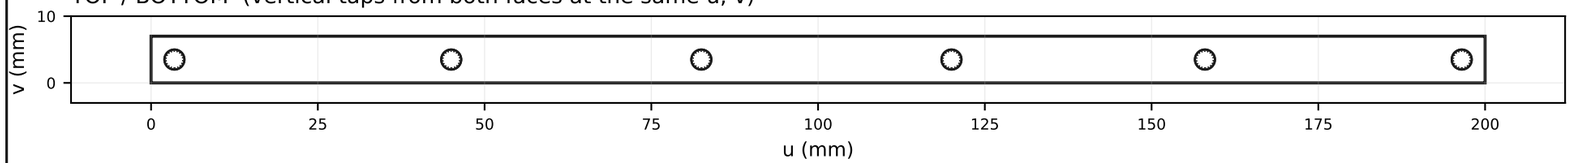

#	Feature	Face / direction	u	v	w	Thread depth	Drill / note
1	M3x0.5 - 6H	bottom (w = 0)	3.50	3.50	0.00	10	Ø2.5 x 12
2	M3x0.5 - 6H	top (w = 52)	3.50	3.50	52.00	8	Ø2.5 x 10
3	M3x0.5 - 6H	bottom (w = 0)	45.00	3.50	0.00	10	Ø2.5 x 12
4	M3x0.5 - 6H	top (w = 52)	45.00	3.50	52.00	8	Ø2.5 x 10
5	M3x0.5 - 6H	bottom (w = 0)	82.50	3.50	0.00	10	Ø2.5 x 12
6	M3x0.5 - 6H	top (w = 52)	82.50	3.50	52.00	8	Ø2.5 x 10
7	M3x0.5 - 6H	bottom (w = 0)	120.00	3.50	0.00	10	Ø2.5 x 12
8	M3x0.5 - 6H	top (w = 52)	120.00	3.50	52.00	8	Ø2.5 x 10
9	M3x0.5 - 6H	bottom (w = 0)	158.00	3.50	0.00	10	Ø2.5 x 12
10	M3x0.5 - 6H	top (w = 52)	158.00	3.50	52.00	8	Ø2.5 x 10
11	M3x0.5 - 6H	bottom (w = 0)	196.50	3.50	0.00	10	Ø2.5 x 12
12	M3x0.5 - 6H	top (w = 52)	196.50	3.50	52.00	8	Ø2.5 x 10
13	Ø3.4 through	v = 0 to v = 7 (through)	3.50	-	20.00	-	clearance for the M3x16 joint screw
14	Ø3.4 through	v = 0 to v = 7 (through)	3.50	-	32.00	-	clearance for the M3x16 joint screw
15	Ø3.4 through	v = 0 to v = 7 (through)	196.50	-	20.00	-	clearance for the M3x16 joint screw
16	Ø3.4 through	v = 0 to v = 7 (through)	196.50	-	32.00	-	clearance for the M3x16 joint screw
17	Ø3.4 through	v = 0 to v = 7 (through)	45.00	-	20.00	-	clearance for the M3x16 joint screw
18	Ø3.4 through	v = 0 to v = 7 (through)	45.00	-	32.00	-	clearance for the M3x16 joint screw
19	Ø3.4 through	v = 0 to v = 7 (through)	120.00	-	20.00	-	clearance for the M3x16 joint screw
20	Ø3.4 through	v = 0 to v = 7 (through)	120.00	-	32.00	-	clearance for the M3x16 joint screw
21	notch	bottom, through v	178.00..192.00	0..7	0..12	-	J_PWR connector notch

NOTES

Material: aluminium 6061-T6 bar (EN AW-6082-T6 is fine too).
Finish: bead blast (fine glass bead) or as machined. DO NOT ANODISE: the contact faces must conduct (they clamp the PCB's ground strips). Conductive chromate (chemical film) is welcome.
General tolerances ISO 2768-mK. Break sharp edges 0.2-0.5 mm, except on the contact faces.
All units mm. Origin = the marked corner (u, v, w as drawn). Holes not listed: none.
Contact faces w = 0 and w = 52: flatness 0.05; height 52 +/-0.05 (all bars alike, so the lid and the PCB seat on every bar). Thread depths are full-thread depths; drill depths as listed.
Taps: M3 x 0.5, class 6H, with a 90 deg x 0.3 countersink at the entry.