ELARA-SH-06 Lid (sheet metal, laser cut, flat)

Quantity per shield: 1 Material: aluminium 5052 sheet, 2 mm, laser cut (EN AW-5754 is fine too) ELARA antenna-amplifier shield, rev 0.2 (generated by mechanical/jlccnc.py)

Size 228 x 100 x 2

TOP (y downwards; origin at the marked corner)

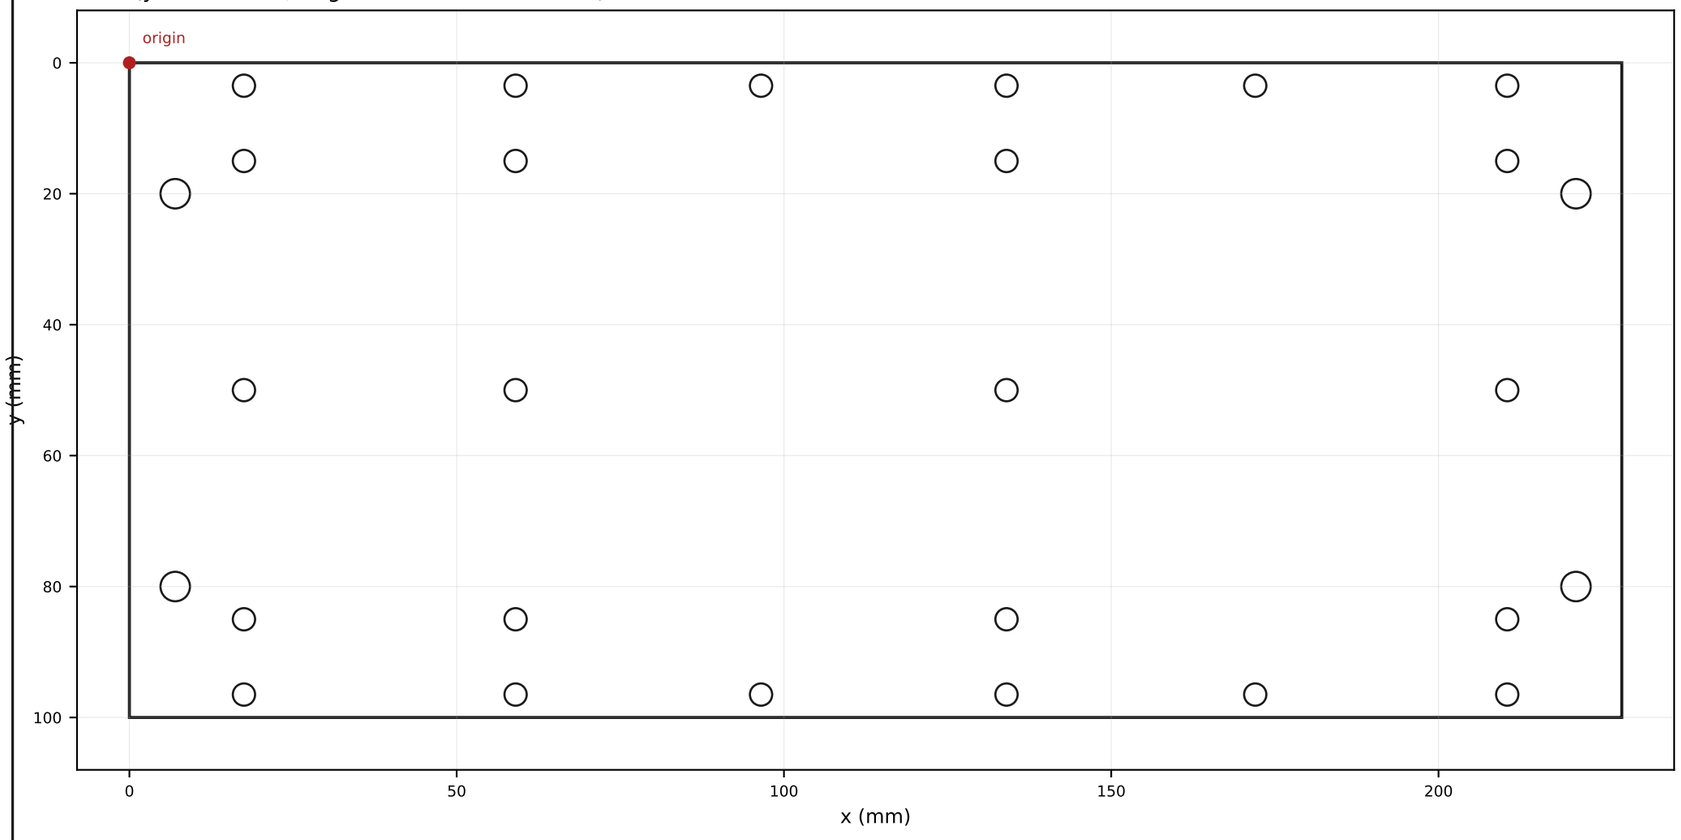

#	Feature	x	y	Note
1	Ø3.4 through	x 17.5	y 3.5	M3 clearance
2	Ø3.4 through	x 59	y 3.5	M3 clearance
3	Ø3.4 through	x 96.5	y 3.5	M3 clearance
4	Ø3.4 through	x 134	y 3.5	M3 clearance
5	Ø3.4 through	x 172	y 3.5	M3 clearance
6	Ø3.4 through	x 210.5	y 3.5	M3 clearance
7	Ø3.4 through	x 17.5	y 96.5	M3 clearance
8	Ø3.4 through	x 59	y 96.5	M3 clearance
9	Ø3.4 through	x 96.5	y 96.5	M3 clearance
10	Ø3.4 through	x 134	y 96.5	M3 clearance
11	Ø3.4 through	x 172	y 96.5	M3 clearance
12	Ø3.4 through	x 210.5	y 96.5	M3 clearance
13	Ø3.4 through	x 17.5	y 15	M3 clearance
14	Ø3.4 through	x 17.5	y 50	M3 clearance

#	Feature	x	y	Note
15	Ø3.4 through	x 17.5	y 85	M3 clearance
16	Ø3.4 through	x 210.5	y 15	M3 clearance
17	Ø3.4 through	x 210.5	y 50	M3 clearance
18	Ø3.4 through	x 210.5	y 85	M3 clearance
19	Ø3.4 through	x 59	y 15	M3 clearance
20	Ø3.4 through	x 59	y 50	M3 clearance
21	Ø3.4 through	x 59	y 85	M3 clearance
22	Ø3.4 through	x 134	y 15	M3 clearance
23	Ø3.4 through	x 134	y 50	M3 clearance
24	Ø3.4 through	x 134	y 85	M3 clearance
25	Ø4.5 through	x 7	y 20	M4 clear., ear
26	Ø4.5 through	x 221	y 20	M4 clear., ear
27	Ø4.5 through	x 7	y 80	M4 clear., ear
28	Ø4.5 through	x 221	y 80	M4 clear., ear

NOTES

Material: aluminium 5052 sheet, 2 mm, laser cut (EN AW-5754 is fine too).
Finish: bead blast (fine glass bead) or as machined. DO NOT ANODISE: the contact faces must conduct (they clamp the PCB's ground strips). Conductive chromate (chemical film) is welcome.
General tolerances ISO 2768-mK. Break sharp edges 0.2-0.5 mm, except on the contact faces.
All units mm. Origin = the marked corner (u, v, w as drawn). Holes not listed: none.
Flat part, no bends, no threads. Hole positions +/-0.1.