






MAINS (primary)

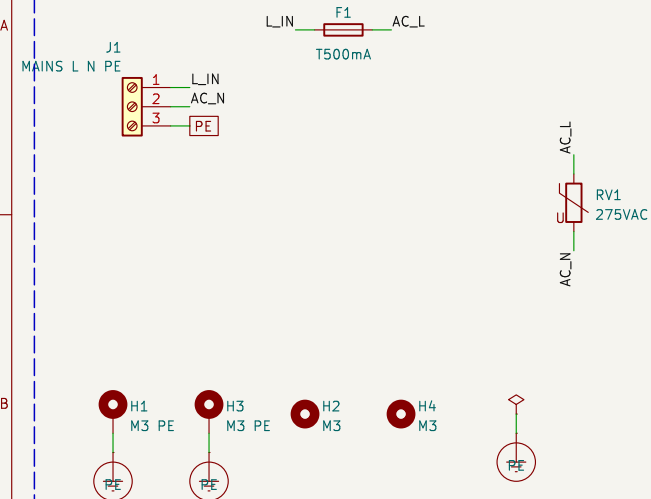


AC-DC 15 V

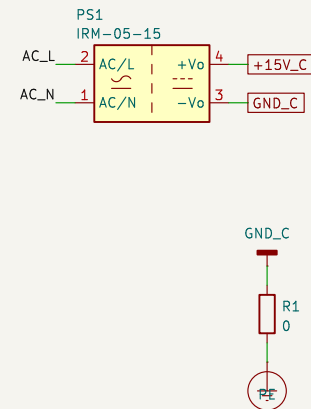


CHARGER (GND_C) CC 0.2 A -> CV 10.9 V

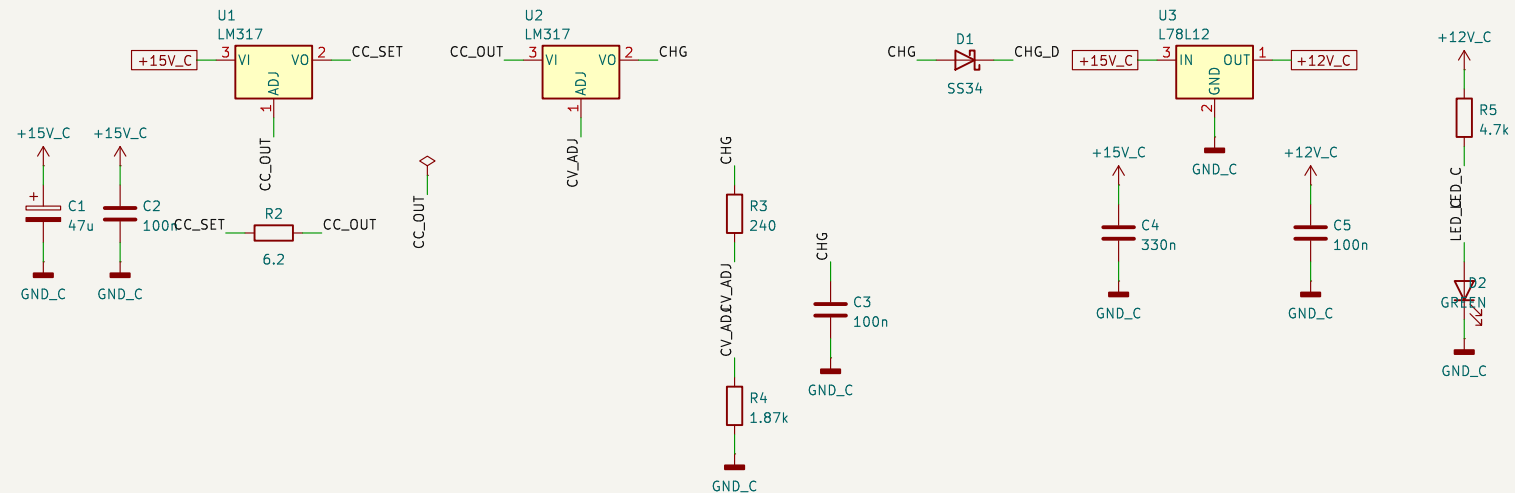


SWAP TIMER Q14 toggles every ~15 s

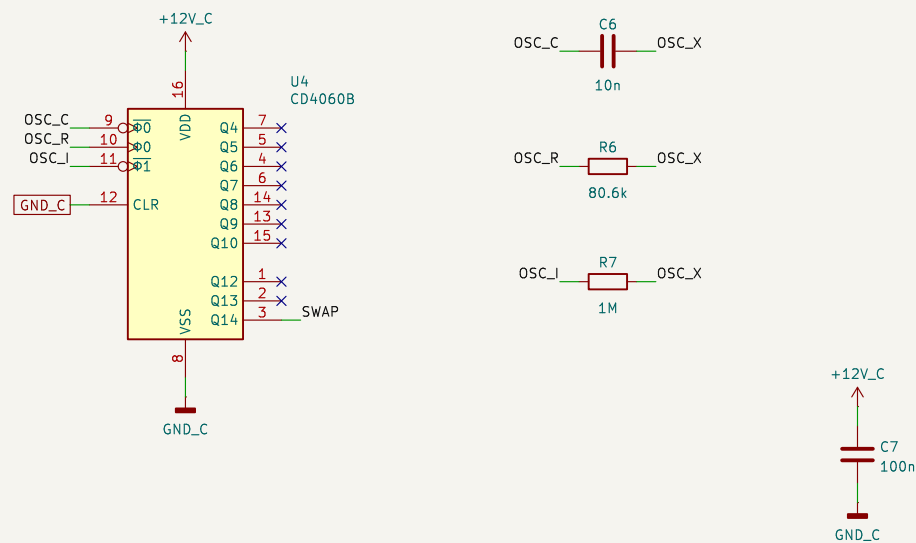


BUCKET SWAP (form C: break before make)

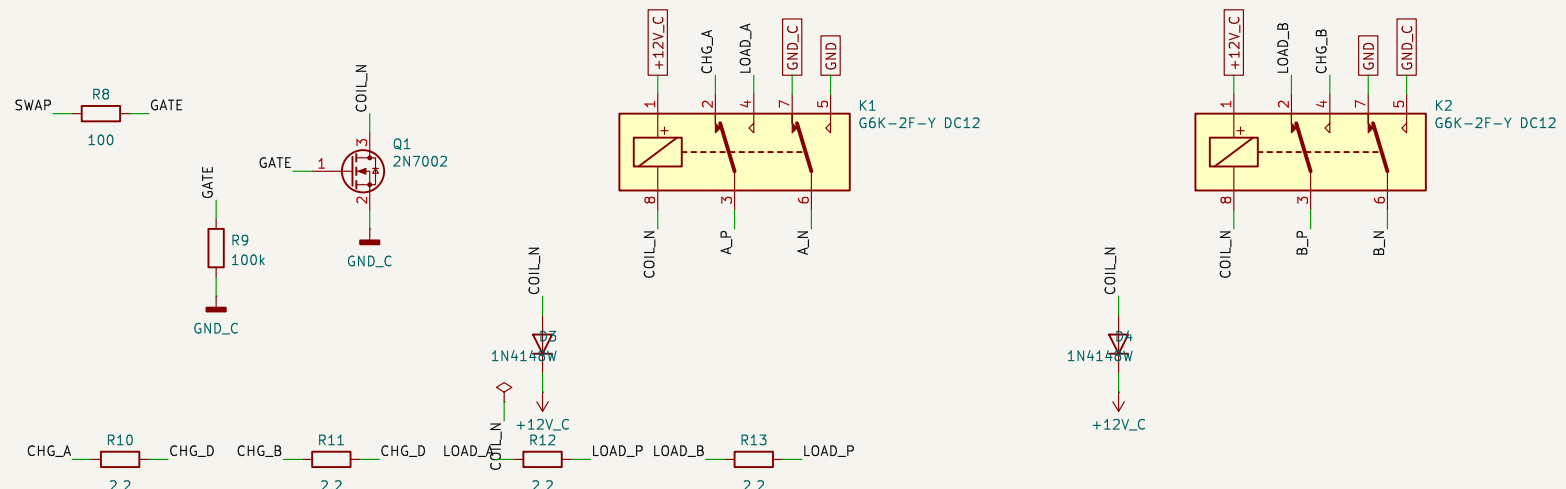


BUCKET A 2.5 F



BUCKET B 2.5 F



RECEIVER SIDE LT3045 6.98 V

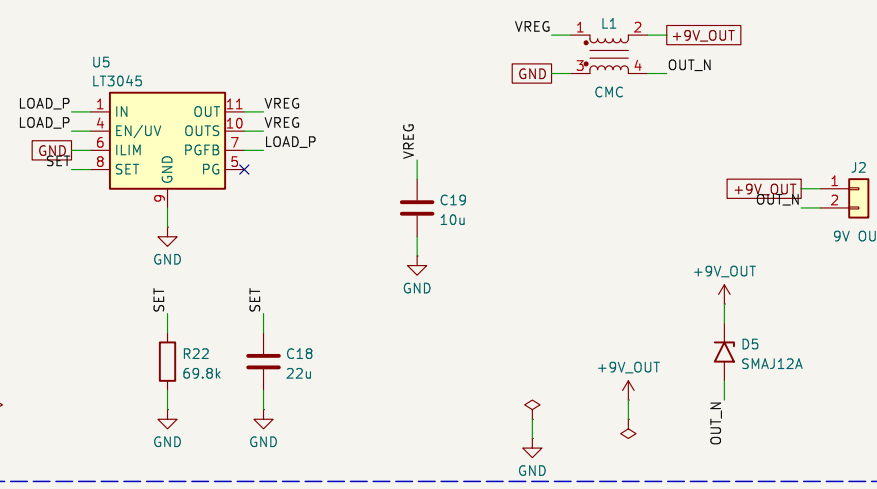

MAINS VOLTAGE on the primary side -- 6.4 mm creepage to everything else Generated by PCB/acdc_converter/design.py -- edit the script, not the sheet CERN-OHL-W-2.0		
ELARA -- ELF Atmospheric Radio Analyser		
Sheet: /Two-bucket isolated supply/ File: psu.kicad_sch		
Title: ELARA PSU -- Two-bucket isolated supply		
Size: A3	Date:	Rev: 0.2
KiCad E.D.A. 9.0.9		Id: 2/2

Buckets top out at ~10.3 V (two LM317 drops + SS34), 15 s at ~0.11 A droops ~0.7 V; LT3045 at 6.98 V keeps >= 0.5 V headroom in the worst corner (simulations/psu). Swap rate 33 mHz, below the ELF band.