


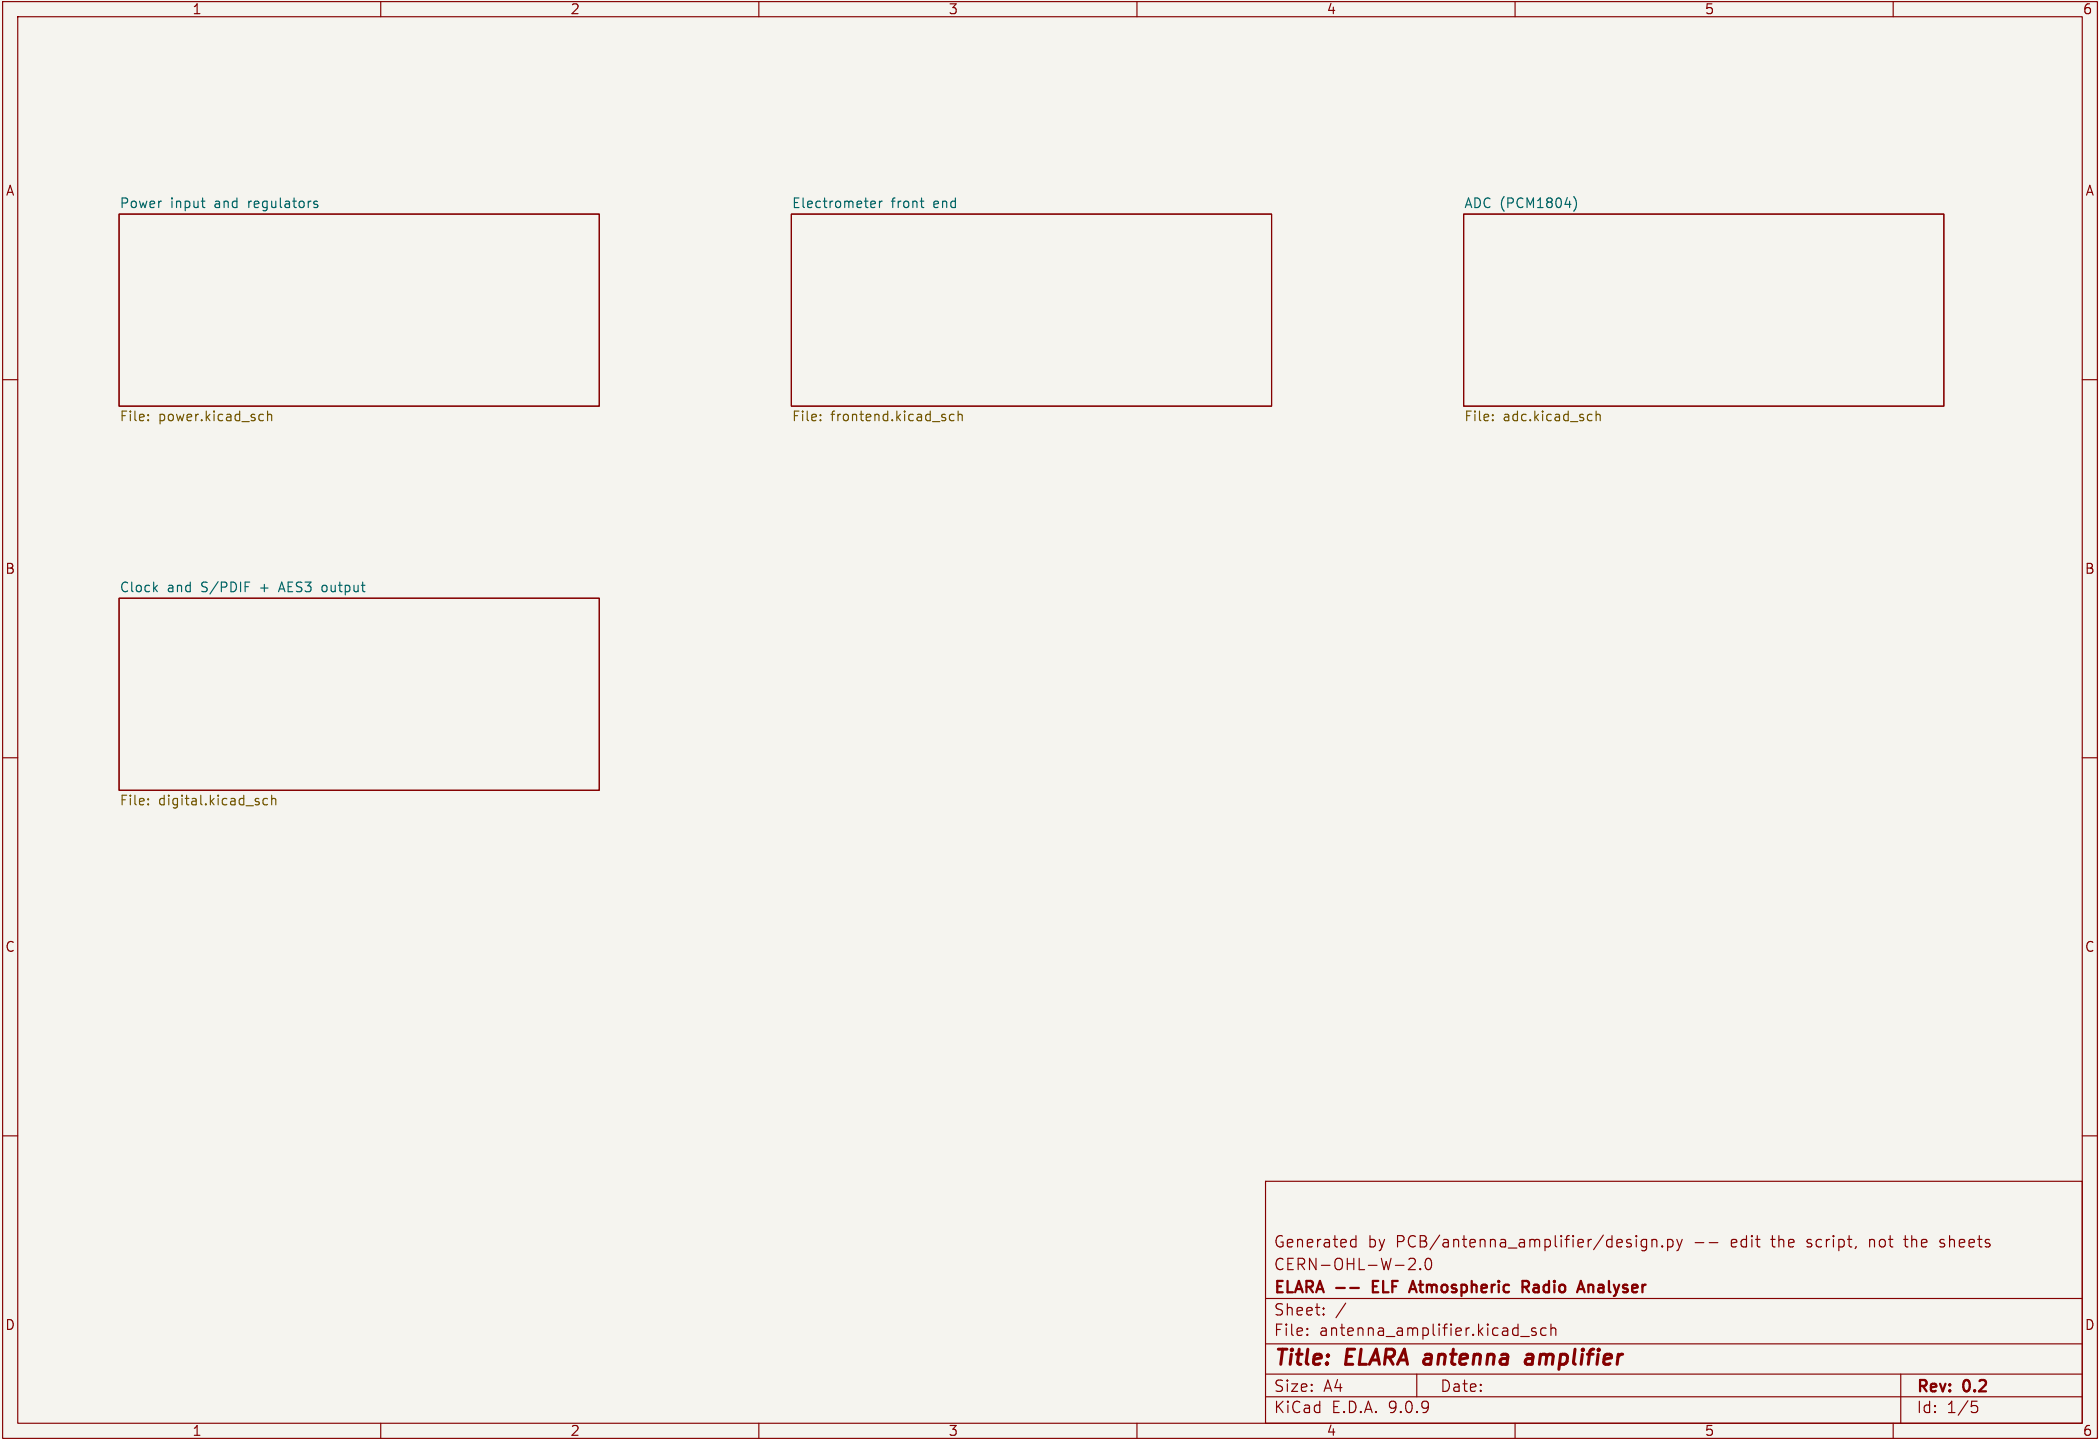
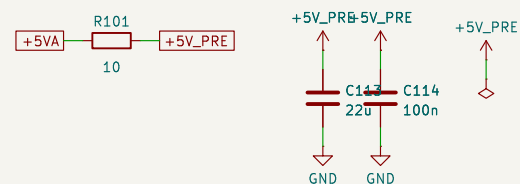
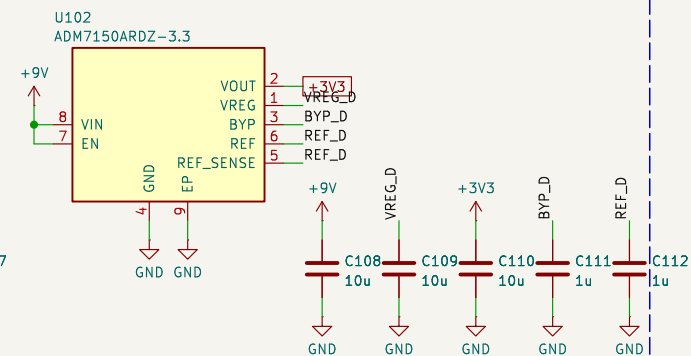


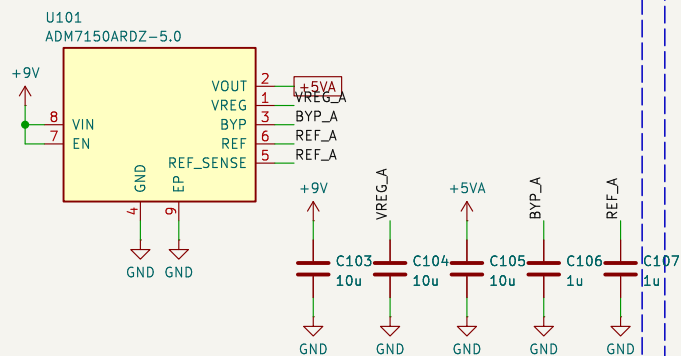

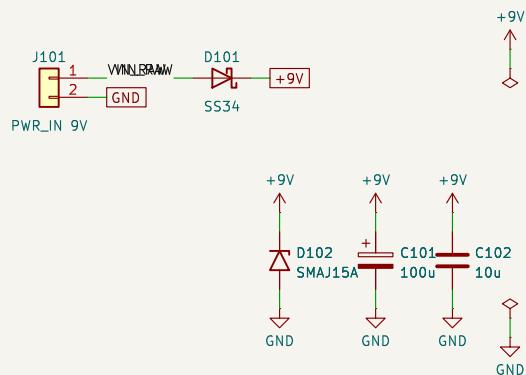


No switching regulators on this board.

INPUT (comp. 1)




IN_P: guard on all layers,
no mask, PTFE turret.
J2: fit G—ohm bias R


ELECTROMETER $G = 101$

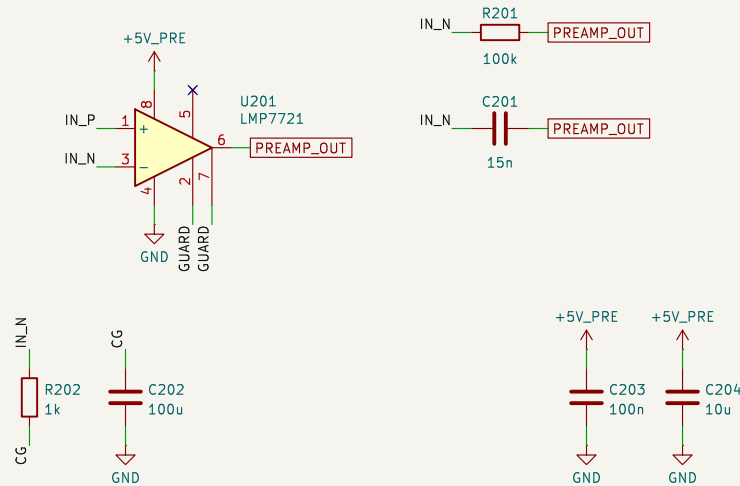


GUARD DRIVER

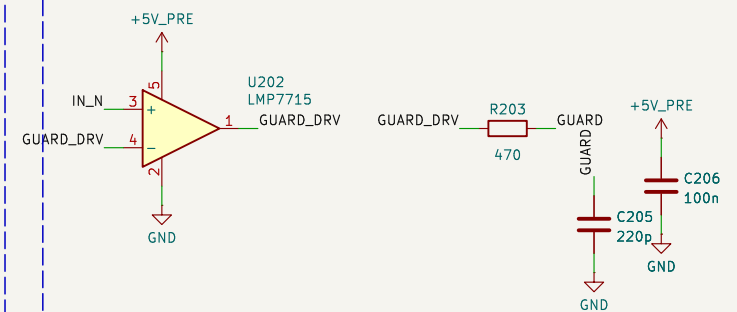

TEST POINTS

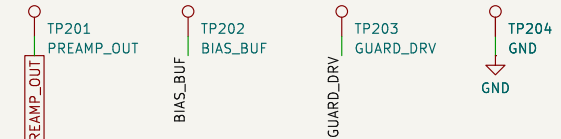

ANTENNA BIAS 2.5 V

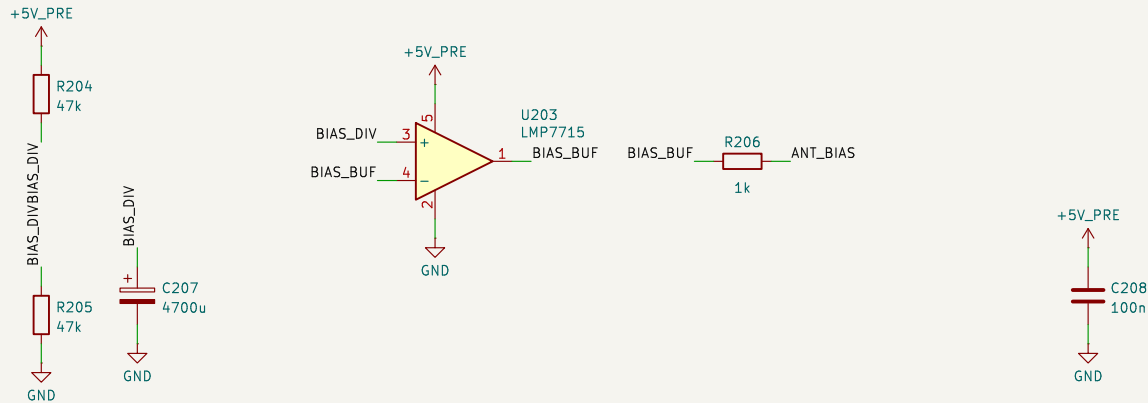

Cg returns to GND: the 2.5 V buffer noise stays out of the gain path.
Guard buffer senses IN⁻ (virtual short to IN⁺): no bias current on IN_P.

Generated by PCB/antenna_amplifier/design.py -- edit the script, not the sheets
CERN—OHL—W—2.0


ELARA -- ELF Atmospheric Radio Analyser

Sheet: /Electrometer front end/
File: frontend.kicad_sch



Title: ELARA antenna amplifier – Electrometer front end

Size: A4 Date: Rev: 0.2
KiCad E.D.A. 9.0.9 Id: 3/5



COUPLING, ANTI-ALIAS, ADC DRIVER

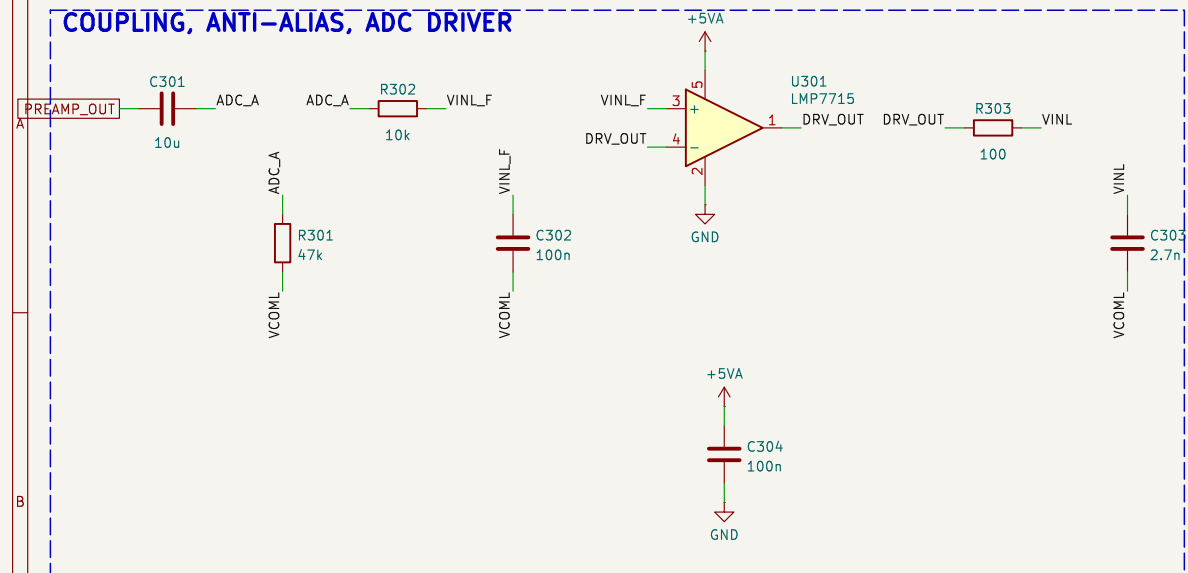

PCM1804 MODE (ON = 1)

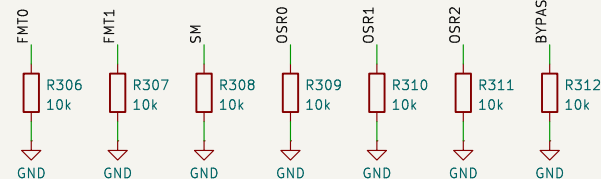


PCM1804 master, 192 kHz

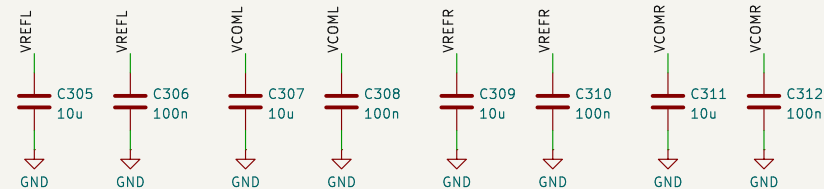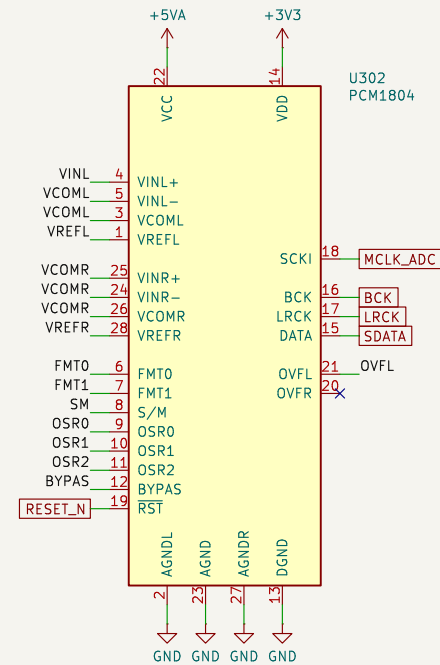

Default (192 kHz): S/M=1 master, OSR2..0=111 (SCKI=128 fs), FMT1..0=01 I2S, BYPAS=1 (HPF off).
Change switches with power off, or press RESET afterwards.


SUPPLY DECOUPLING

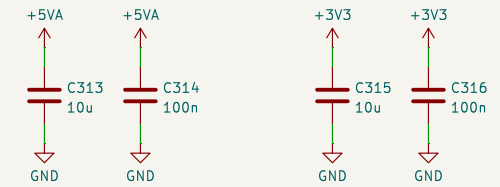

OVERLOAD



RESET

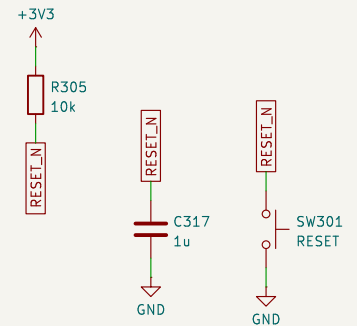

Generated by PCB/antenna_amplifier/design.py -- edit the script, not the sheets
CERN-OHL-W-2.0
ELARA -- ELF Atmospheric Radio Analyser
Sheet: /ADC (PCM1804)/
File: adc.kicad_sch

Title: ELARA antenna amplifier – ADC (PCM1804)

Size: A3

Date:

Rev: 0.2

KiCad E.D.A. 9.0.9

Id: 4/5

