ELARA-SH-05 Bottom tray (pocket-milled)

Quantity per shield: 1 Material: aluminium 6061-T6 plate, 15 mm, faced to 14 (EN AW-6082-T651 is fine too) ELARA antenna-amplifier shield, rev 0.2 (generated by mechanical/jlccnc.py)

Size 200 x 100 x 14

TOP (y downwards; origin at the marked corner)

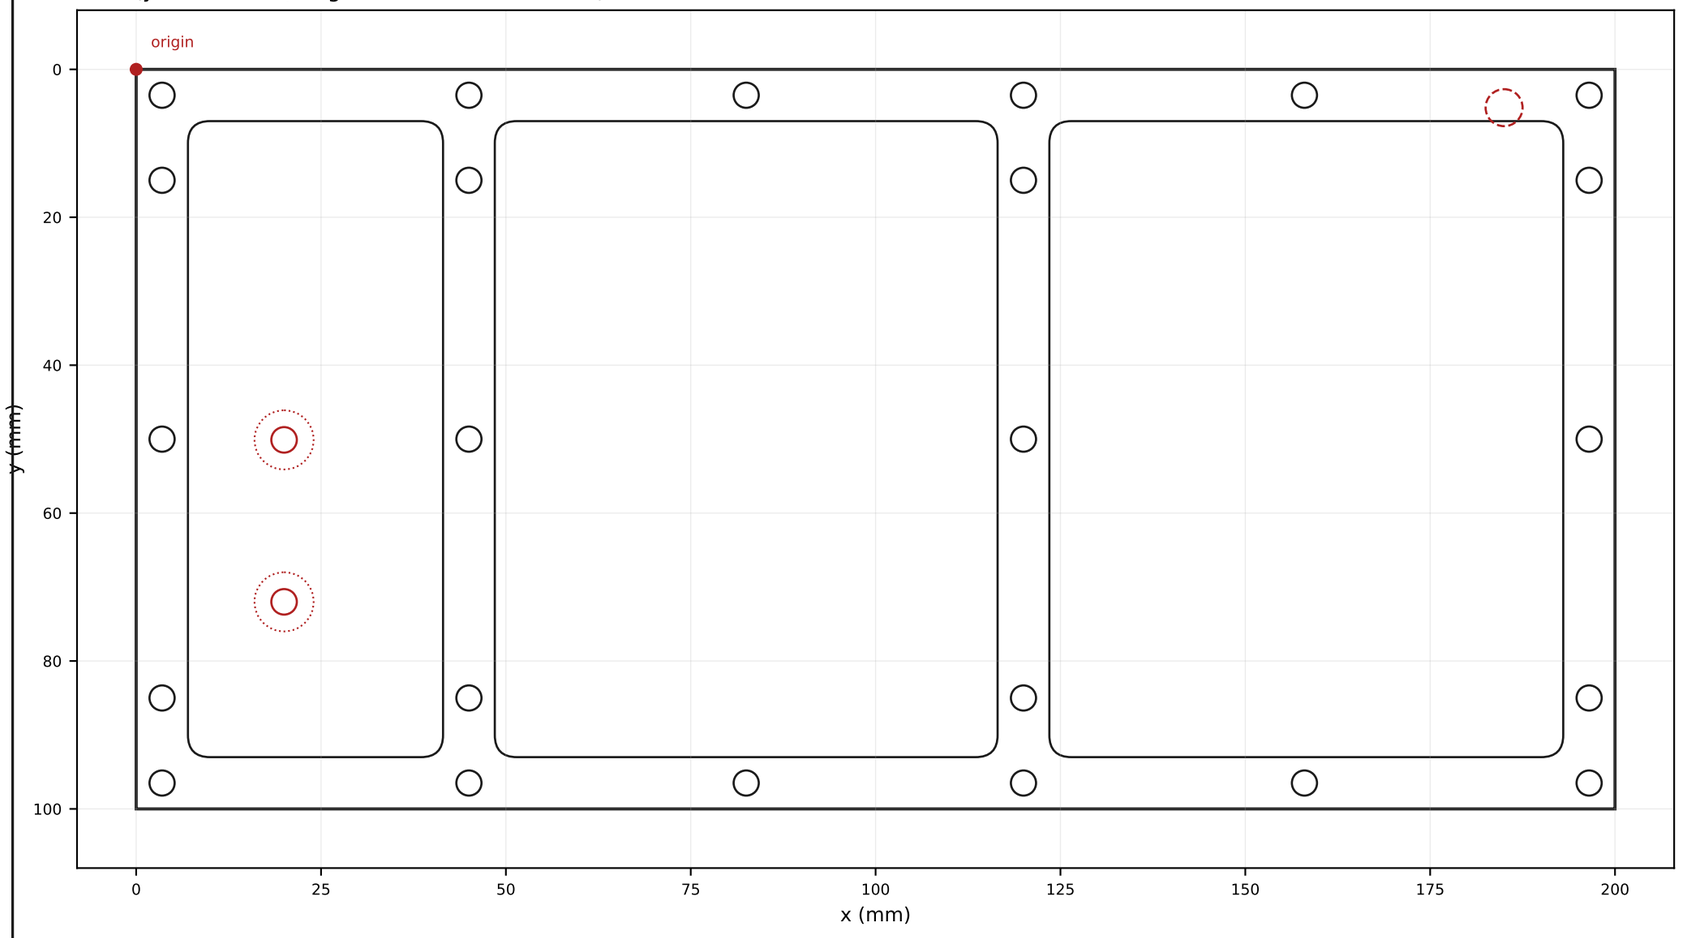

#	Feature	x	y	Note
1	pocket 12 deep R3	x 7..41.5	y 7..93	pocket C1
2	pocket 12 deep R3	x 48.5..116.5	y 7..93	pocket C2
3	pocket 12 deep R3	x 123.5..193	y 7..93	pocket C3
4	Ø3.4 through	x 3.5	y 3.5	M3 clearance
5	Ø3.4 through	x 45	y 3.5	M3 clearance
6	Ø3.4 through	x 82.5	y 3.5	M3 clearance
7	Ø3.4 through	x 120	y 3.5	M3 clearance
8	Ø3.4 through	x 158	y 3.5	M3 clearance
9	Ø3.4 through	x 196.5	y 3.5	M3 clearance
10	Ø3.4 through	x 3.5	y 96.5	M3 clearance
11	Ø3.4 through	x 45	y 96.5	M3 clearance
12	Ø3.4 through	x 82.5	y 96.5	M3 clearance
13	Ø3.4 through	x 120	y 96.5	M3 clearance
14	Ø3.4 through	x 158	y 96.5	M3 clearance
15	Ø3.4 through	x 196.5	y 96.5	M3 clearance
16	Ø3.4 through	x 3.5	y 15	M3 clearance

#	Feature	x	y	Note
17	Ø3.4 through	x 3.5	y 50	M3 clearance
18	Ø3.4 through	x 3.5	y 85	M3 clearance
19	Ø3.4 through	x 196.5	y 15	M3 clearance
20	Ø3.4 through	x 196.5	y 50	M3 clearance
21	Ø3.4 through	x 196.5	y 85	M3 clearance
22	Ø3.4 through	x 45	y 15	M3 clearance
23	Ø3.4 through	x 45	y 50	M3 clearance
24	Ø3.4 through	x 45	y 85	M3 clearance
25	Ø3.4 through	x 120	y 15	M3 clearance
26	Ø3.4 through	x 120	y 50	M3 clearance
27	Ø3.4 through	x 120	y 85	M3 clearance
28	Ø3.45 through	x 20	y 50.1	press-fit, +0.05/0
29	spot-face Ø8 x 0.4	x 20	y 50.1	from the outside face
30	Ø3.45 through	x 20	y 72	press-fit, +0.05/0
31	spot-face Ø8 x 0.4	x 20	y 72	from the outside face
32	Ø5 x 3.5 blind	x 185	y 5.18	relief, from top

NOTES

Material: aluminium 6061-T6 plate, 15 mm, faced to 14 (EN AW-6082-T651 is fine too).
Finish: bead blast (fine glass bead) or as machined. DO NOT ANODISE: the contact faces must conduct (they clamp the PCB's ground strips). Conductive chromate (chemical film) is welcome.
General tolerances ISO 2768-mK. Break sharp edges 0.2-0.5 mm, except on the contact faces.
All units mm. Origin = the marked corner (u, v, w as drawn). Holes not listed: none.
Top face (z = 14, against the PCB): flatness 0.05. Thickness 14 +/-0.1. Pockets from the top face, inside corners R3 (Ø6 end mill) or smaller. No threads in this part. The two Ø3.45 holes take press-fit PTFE terminals (Keystone 11157): Ø3.45 +0.05/0, and the floor under the spot-face must be 1.6 +/-0.05.