# A pruned spiking network as the first stage of a GRU-verified keyword spotter

Pedro Navarro (2132907)

## I. Aim

The requirement tests of the size and synapse study (R1) showed that no one-window network reaches 85 % live detection: running speech causes false accepts, and keeping them at 2 per hour costs about 20 points. Mateo's cascade, a streaming SNN that proposes and a GRU network that verifies, meets the detection requirements on the same tests. This report asks whether our cheapest design, the pruned 48-neuron network (0.35 ms, 12.4 KiB and 96.5 $\mu$J per window), can replace his first stage: does the cascade meet the requirements (Table I), at what cost, and does retraining the verifier on our network's false proposals help?

## II. Architecture

Fig. 1 shows the cascade. Every 250 ms our pruned SNN scores the last 1 s window. When its margin reaches $t_1$ in this request or the previous one, Mateo's GRU verifier (Fig. 2) scores the last 1.5 s of 10 ms frames, and a head score of at least $t_2$ lights LED0. The decision logic is Mateo's, unchanged; only the first stage is ours. The two networks see the same log-mel bands: the window is 32 time bins of the 24 bands that the verifier reads frame by frame. Two first-stage scores were compared on validation: the single-window margin and the 2-of-3 confirmed margin of R1. Without a call limit they give the same validation recall, but the single-window margin needs fewer verifier calls; with the limit it detects more (85.6 against 78.1 %). It was used throughout.

## III. Method

**Harness.** Mateo's cascade evaluation was copied unchanged; only its stage-1 scorer was replaced by ours. Two checks came first. Mateo's window features and integer model equal ours bit for bit (32,081 windows, 3 seeds). His own cascade, rerun here, reproduces his test report exactly (86.79 % live, 1.424 false accepts per hour, 0.07 % other words, 175 ms) and his validation selection. Our runs use the same audio and frames: window $j$ ends in frame $98+25j$, inside request $j+3$.

**Thresholds.** Both thresholds are chosen on validation with Mateo's rule: the highest live detection with at most 0.2 % other words and 1.6 false accepts per hour (his margin for 2 on test). Each design was then tested once. A second rule adds at most 2,150 verifier calls per hour, Mateo's own value. It was added after the first test, which showed about 10,000 calls per hour, and was fixed before its own test.

**Fine-tuning (B).** Our three networks scored 60 h of LibriSpeech training speech; their 17,725 strongest false proposals became the hard negatives of Mateo's fine-tuning recipe (Table II). Three verifiers were trained (about 3 h on the GPU) and combined with the three stage-1 seeds: nine cascades.

**Cost.** Worst compute per request is the stage-1 board time plus one verifier call (107.3 ms on plain `kdot`, Alex's simulation). Memory is the stage-1 model plus the 53,320-byte verifier. Power uses the Vivado estimates of the `ksdot` fabric. Busy-polling, the firmware as built, keeps the core running, so the power does not depend on the work. Clock gating, a calculation, adds the core energy of each request and each verifier call to a fixed floor.

TABLE I
Requirements and how they are measured. Every test set is the one used for the other designs in this report (Mateo's evaluation harness).

| Requirement | Measured on | Target |
|---|---|---|
| Live "Sheila" detected | 212 test clips in noise, 250 ms hop, 2 of 3 windows | $\geq 85\,\%$ |
| Other words accepted | 3,000 test words, same set-up | $\leq 0.2\,\%$ |
| False accepts per hour | 19.0 h: all other test words + LibriSpeech test-clean/-other | $\leq 2$ |
| Word end to decision | median on a 1 h test stream, plus compute and link | $\leq 500$ ms |
| Compute per request | worst case on the board, 100 MHz | $\leq 200$ ms |
| Model memory | firmware model section | $\leq 144$ KiB |
| Average power, listening | PL, Vivado power × board cycles | $\leq 1$ W |

TABLE II
Verifier fine-tune: Mateo's recipe, unchanged except for the starting point and the hard negatives (windows where our stage 1 proposes "Sheila" in LibriSpeech train-clean-100). Settings read from the checkpoints.

| Setting | Mateo | Ours (R2) |
|---|---|---|
| Epochs × steps | 10 × 500 | 10 × 500 |
| Learning rate (one-cycle) | 0.001 | 0.001 |
| LibriSpeech per step | 180 s | 180 s |
| Keyword batch (keyword / near-miss share) | 128 (0.25 / 0.15) | 128 (0.25 / 0.15) |
| Hard windows per step | 64 | 64 |
| Loss weights (head / hard hinge / pos. hinge) | 1 / 0 / 0 | 1 / 0 / 0 |
| Real keyword clips only | yes | yes |
| Starting point | CTC base (`sheila_logmel`) | Mateo's final verifier |
| Hard negatives | 8,000 from his stage 1 | 17,725 from our 3 seeds |
| Seeds | 1 | 3 |
| Hardware | RTX 4060 Laptop (CUDA) | RX 7800 XT (ROCm, no MIOpen) |

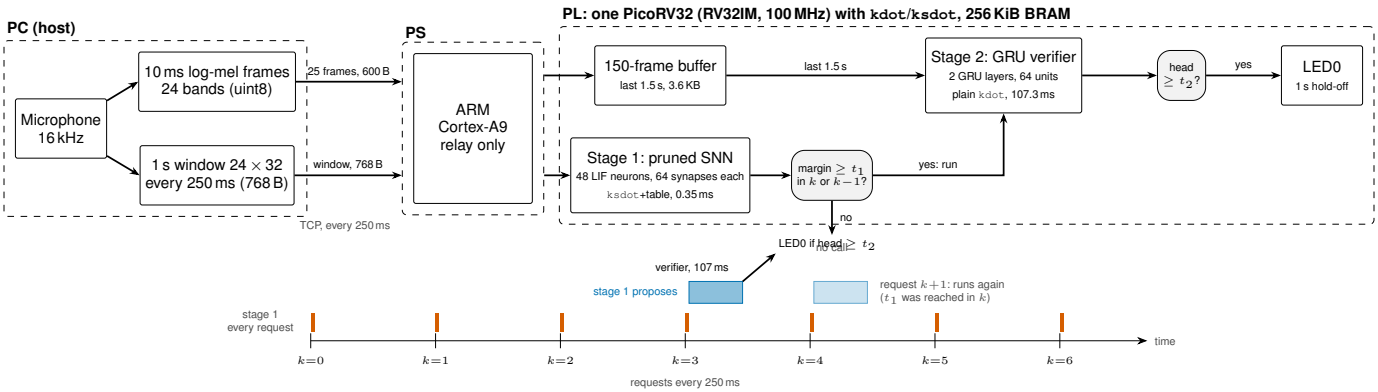



Fig. 1. Proposed cascade (evaluated in software with the board's integer models; no cascade has run on a board yet). Every 250 ms the PC sends the 1 s window for stage 1 and the 25 new 10 ms frames for the verifier's buffer. Stage 1, our pruned window SNN, costs 0.35 ms. When its margin reaches $t_1$ in this request or the previous one, the GRU verifier scores the last 1.5 s (107.3 ms on plain `kdot`); a head score $\geq t_2$ is a detection. The decision logic is Mateo's, unchanged. Bottom: timing of one proposal.





Fig. 2. Mateo's GRU verifier (stage 2). Two 10 ms frames are stacked into one 20 ms step; two GRU layers of 64 units read the last 1.5 s. A CTC phoneme output trains the layers on LibriSpeech; the keyword head, a linear readout per step, gives the decision: its maximum over the steps after a short warm-up is compared with $t_2$. The scores here come from Mateo's integer model, which his firmware reproduces bit for bit.

## IV. Results

Table III gives every design against the requirements; Fig. 3 plots detection, Fig. 5 and Table IV the cost.

**Mateo's verifier, unchanged (A).** The cascade meets every requirement: $87.6 \pm 0.3$ % live, 1.83 false accepts per hour, against 36.3 % for our network alone. But the highest-recall rule sets $t_1$ below zero. Our network then wakes the verifier for most requests (10,244 calls per hour, against Mateo's 2,222): the cascade reaches the verifier's own limit, which is also where Mateo's cascade ends (87.75 % on validation for both). With at most 2,150 calls per hour (A5), live detection falls to $84.4 \pm 0.9$ %, 0.6 points short.

**Fine-tuned verifier (B).** Both rules now meet every requirement:

- *Call limit:* $85.8 \pm 0.8$ % live (7 of 9 cascades $\geq$85 %) with 1,908 calls per hour, 1.4 points above A5. Clip by clip, the nine cascades gain 32 keywords over A5 and lose 5; no single cascade differs significantly (exact McNemar, $p \geq 0.06$).
- *Highest recall:* $87.8 \pm 1.0$ % live (all 9 $\geq$85 %) with $3{,}044 \pm 984$ calls per hour, 70 % fewer than A at the same detection.
- Other words rise from 0.03–0.10 % to 0.15 %, still inside 0.2 % (Fig. 6).

**The first stage.** Fig. 4 shows why so many calls are needed: our network ranks some real "Sheila" windows below much speech, so reaching them takes many proposals. Mateo's streaming SNN is the better proposer. Running speech remains the main source of false accepts in every design, our network alone and Mateo's cascade included (Fig. 7).

**Cost.** Every cascade meets all cost requirements: 107.6 ms worst compute (54 % of the budget), 64.5 KiB, 162–178 ms from word end to decision, and 0.367 W average PL power as built, half of Mateo's 0.727 W, because our fabric is smaller. As built, the calls change nothing; with clock gating they would: 0.110 W at about 1,900 calls per hour against 0.177 W at 10,244. Counted like Alex's figures, the work energy is 77 and 76 J per hour for A5 and B under the call limit, 120 J for B at highest recall and 400 J for A, against 277 J for Mateo's cascade.

## V. Trade-offs and Key Findings

- **The cheapest first stage works with a verifier.** Our pruned network plus Mateo's GRU meets all seven requirements, from 36 % live detection alone.
- **The verifier does the detecting.** Without a limit, our network becomes almost a pass-through; the cascade's detection is the verifier's.
- **Two B operating points, neither preferred.** The call limit uses 37 % fewer verifier calls (1,908 against 3,044 per hour) but sits 0.85 points above 85 %, with 2 of 9 cascades below; the highest-recall rule keeps a 2.8-point margin. On today's board both draw the same power; with clock gating the call limit would save 9 mW (0.110 against 0.119 W).
- **Fine-tuning helps where calls are limited.** It raises detection at a fixed number of calls, or cuts the calls at a fixed detection; it does not raise the verifier's own limit.
- **Energy needs idle hardware.** With busy-polling, every verifier call is free. Fewer calls save energy only when the core can stop between requests.

## VI. Later Work

- **Clock gating (next step).** First a measured number without RTL changes: lower the FPGA clock from Python

TABLE III

RESULTS ON THE TEST SETS (THRESHOLDS FIXED ON VALIDATION, TEST RUN ONCE). OURS: MEAN OVER 3 STAGE-1 SEEDS (A, A5, SNN ALONE) OR 9 CASCADES (B: 3 FINE-TUNED VERIFIERS × 3 STAGE-1 SEEDS). MATEO'S CASCADE: HIS FINAL TEST, REPRODUCED EXACTLY HERE; HIS MEMORY IS REPORTED IN HIS OWN SECTION. POWER: BUSY-POLLING, AS BUILT (OURS ON THE KSDOT FABRIC, MATEO'S ON ALEX'S DUAL-CORE FABRIC). √ MET, × MISSED.

| Requirement | Target | SNN alone (R1) | A Mateo's verif. highest recall | A5 Mateo's verif. ≤2,150 calls/h | B fine-tuned ≤2,150 calls/h | B fine-tuned highest recall | Mateo SNN + GRU |
|---|---|---|---|---|---|---|---|
| Live "Sheila" detected | ≥85 % | 36.3 ± 6.1 % × | 87.6 ± 0.3 % √ | 84.4 ± 0.9 % × | 85.8 ± 0.8 % √ | 87.8 ± 1.0 % √ | 86.8 % √ |
| False accepts per hour | ≤2 | 2.86 × | 1.83 √ | 1.09 √ | 1.21 √ | 1.48 √ | 1.42 √ |
| Other words accepted | ≤0.2 % | 0.03 % √ | 0.10 % √ | 0.03 % √ | 0.15 % √ | 0.15 % √ | 0.07 % √ |
| Word end to decision | ≤500 ms | 134 ms √ | 162 ms √ | 163 ms √ | 178 ms √ | 171 ms √ | 177 ms √ |
| Compute per request | ≤200 ms | 0.35 ms √ | 107.6 ms √ | 107.6 ms √ | 107.6 ms √ | 107.6 ms √ | 117.3 ms √ |
| Model memory | ≤144 KiB | 12.4 KiB √ | 64.5 KiB √ | 64.5 KiB √ | 64.5 KiB √ | 64.5 KiB √ | — |
| Average PL power | ≤1 W | 367 mW √ | 367 mW √ | 367 mW √ | 367 mW √ | 367 mW √ | 727 mW √ |
| Verifier calls per hour | | 0 | 10,244 | 1,937 | 1,908 | 3,044 | 2,222 |
| Live, complete recordings | | 42.7 % | 92.9 % | 90.2 % | 91.8 % | 93.6 % | 92.0 % |
| Stream recall (1 h) | | 47.4 % | 87.9 % | 85.7 % | 88.0 % | 89.5 % | 87.9 % |

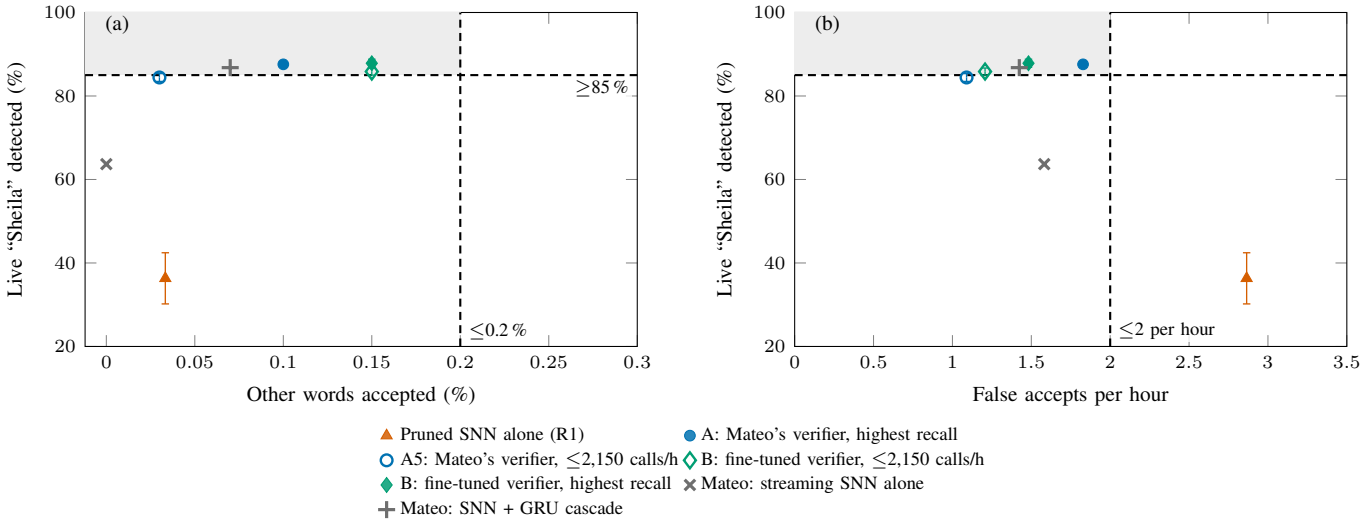



Fig. 3. Detection quality on the test sets against the requirements; the shaded corner meets both. Each threshold was fixed on validation and the test was run once. Mean ± sd: 3 seeds of our stage 1 (A, A5), 9 cascades for B (3 fine-tuned verifiers × 3 stage-1 seeds); Mateo's designs are single models. Colour: the verifier (blue: Mateo's, unchanged; green: fine-tuned on our false proposals). Filled: the highest-recall rule; hollow: at most 2,150 verifier calls per hour.

TABLE IV

COST BREAKDOWN. $E_V$: PL ENERGY PER VERIFIER CALL (TOTAL PL POWER × 105.83 MS); WORK: 14,400 STAGE-1 REQUESTS PLUS THE VERIFIER CALLS PER HOUR, BOTH AT TOTAL PL POWER (ALEX'S METHOD). BUSY: AVERAGE PL POWER AS BUILT. GATED: WITH CLOCK GATING, A CALCULATION. OURS: KSDOT FABRIC (0.367 W); MATEO: ALEX'S DUAL-CORE FABRIC (0.727 W, 7.40 MJ PER STAGE-1 REQUEST).

| Design | $t_{max}$ (ms) | Memory (KiB) | Calls per h | $E_V$ (mJ) | Work (J/h) | Busy (mW) | Gated (mW) |
|---|---|---|---|---|---|---|---|
| SNN alone | 0.3 | 12.4 | 0 | — | 2 | 367 | 94 |
| A | 107.6 | 64.5 | 10,244 | 38.8 | 400 | 367 | 177 |
| A5 | 107.6 | 64.5 | 1,937 | 38.8 | 77 | 367 | 110 |
| B, calls | 107.6 | 64.5 | 1,908 | 38.8 | 76 | 367 | 110 |
| B, recall | 107.6 | 64.5 | 3,044 | 38.8 | 120 | 367 | 119 |
| Mateo | 117.3 | — | 2,222 | 76.9 | 277 | 727 | — |

and read the USB meter; then stop the core and BRAM clocks between requests.

- **Hardware merge.** Run the cascade on the board: the PC also sends the 10 ms frames, the core keeps a 1.5 s buffer, and Alex's GRU instructions cut a verifier call from 105.83 to 41.16 ms (they clash with `ksdot` on the opcode and must move).
- **A better proposer.** Retrain our network on Mateo's training data to cut running-speech proposals.

**Limits.** Three stage-1 seeds and three verifier seeds. Live detection uses 212 test keywords (one clip is 0.47 points), and 2 false accepts per hour over 19 h are about 38 events. Calls are counted on a speech-dense stream, so quiet rooms need fewer. Power is a Vivado estimate, and no cascade has run on a board. GPU training is not bit-reproducible; the seeds show the spread. Mateo's recipe uses only the 4,218 of 32,000 synthetic training words that have dictionary pronunciations.

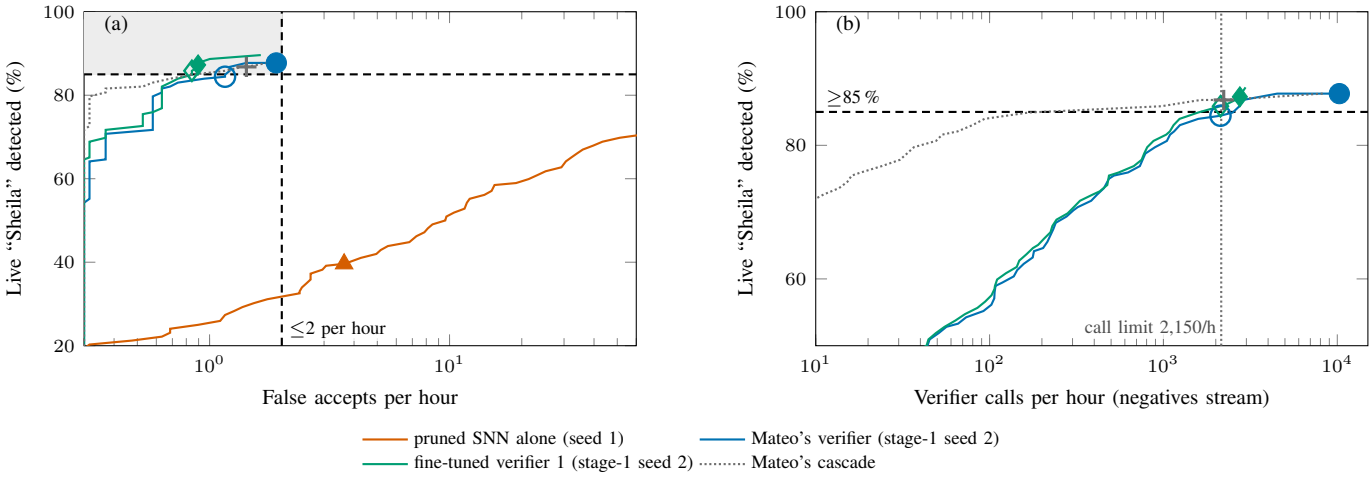



Fig. 4. What each verifier can trade, on test (lines: every stage-1 threshold $t_1$ at the verifier threshold $t_2$ fixed on validation; large markers: the operating points fixed on validation, styles as in Fig. 3). The configuration shown sits at the design means. (a) All thresholds. (b) Only thresholds that also meet ≤0.2 % other words and ≤2 false accepts per hour. On test, Mateo's stage 1 gives 84 % with at most 120 verifier calls per hour and 85 % from 971; ours needs 2,129 calls per hour for 85 % with the fine-tuned verifier and 2,735 with Mateo's. Illustration only: no operating point was chosen on these curves.

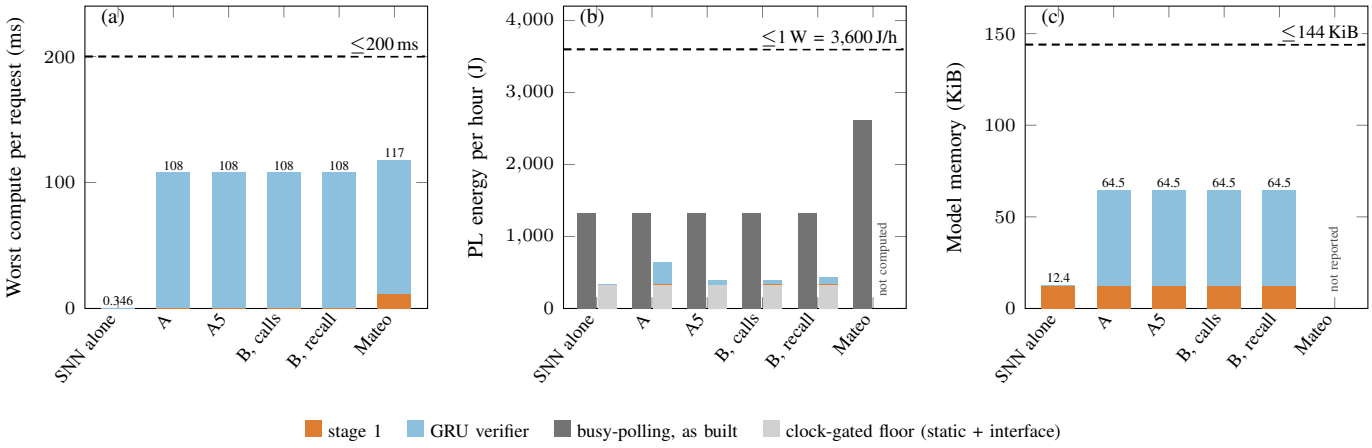



Fig. 5. Cost of the cascades. (a) Worst compute per 250 ms request: stage 1 on `ksdot`+table (0.35 ms, from board runs) plus one verifier call on plain `kdot` (107.3 ms, RTL simulation by Alex); Mateo's from his README. (b) PL energy per hour: left bar, busy-polling (the firmware as built: the core never idles, so the energy does not depend on the work); right bar, clock gating (a calculation): the floor plus the core energy of stage 1 and of the verifier calls. Ours on the `ksdot` fabric, Mateo's on Alex's dual-core fabric (0.727 W). (c) Model memory: stage-1 model plus the 52.1 KiB int8 verifier.

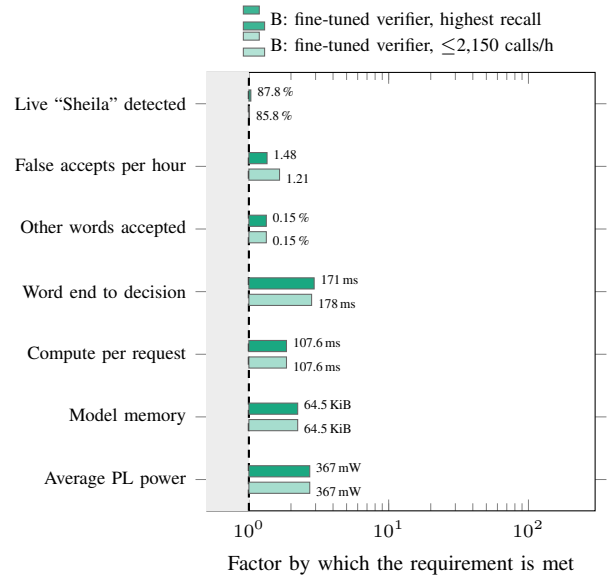



Fig. 6. Both Phase B cascades against every requirement, as the factor by which each is met (value/target for live detection, target/value otherwise; mean of 9 cascades); numbers are the measured values. Both meet all seven. Live detection and other words are the tight ones: 1.01 and 1.3 times under the call limit.

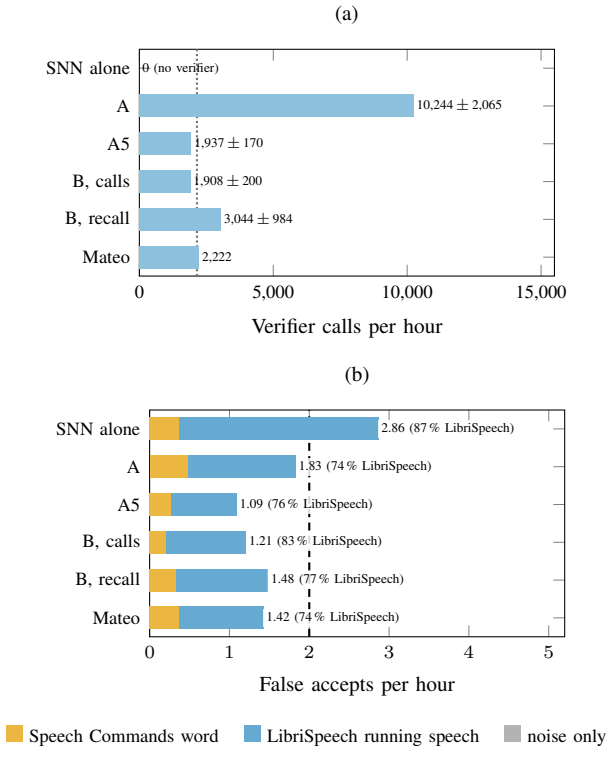



Fig. 7. (a) Verifier calls per hour on the 19 h negatives stream (mean ± sd; dotted: the 2,150 call limit). (b) False accepts per hour on the same stream by what was playing in the second before the detection (dashed: the requirement). Running speech is most of the false accepts in every design.