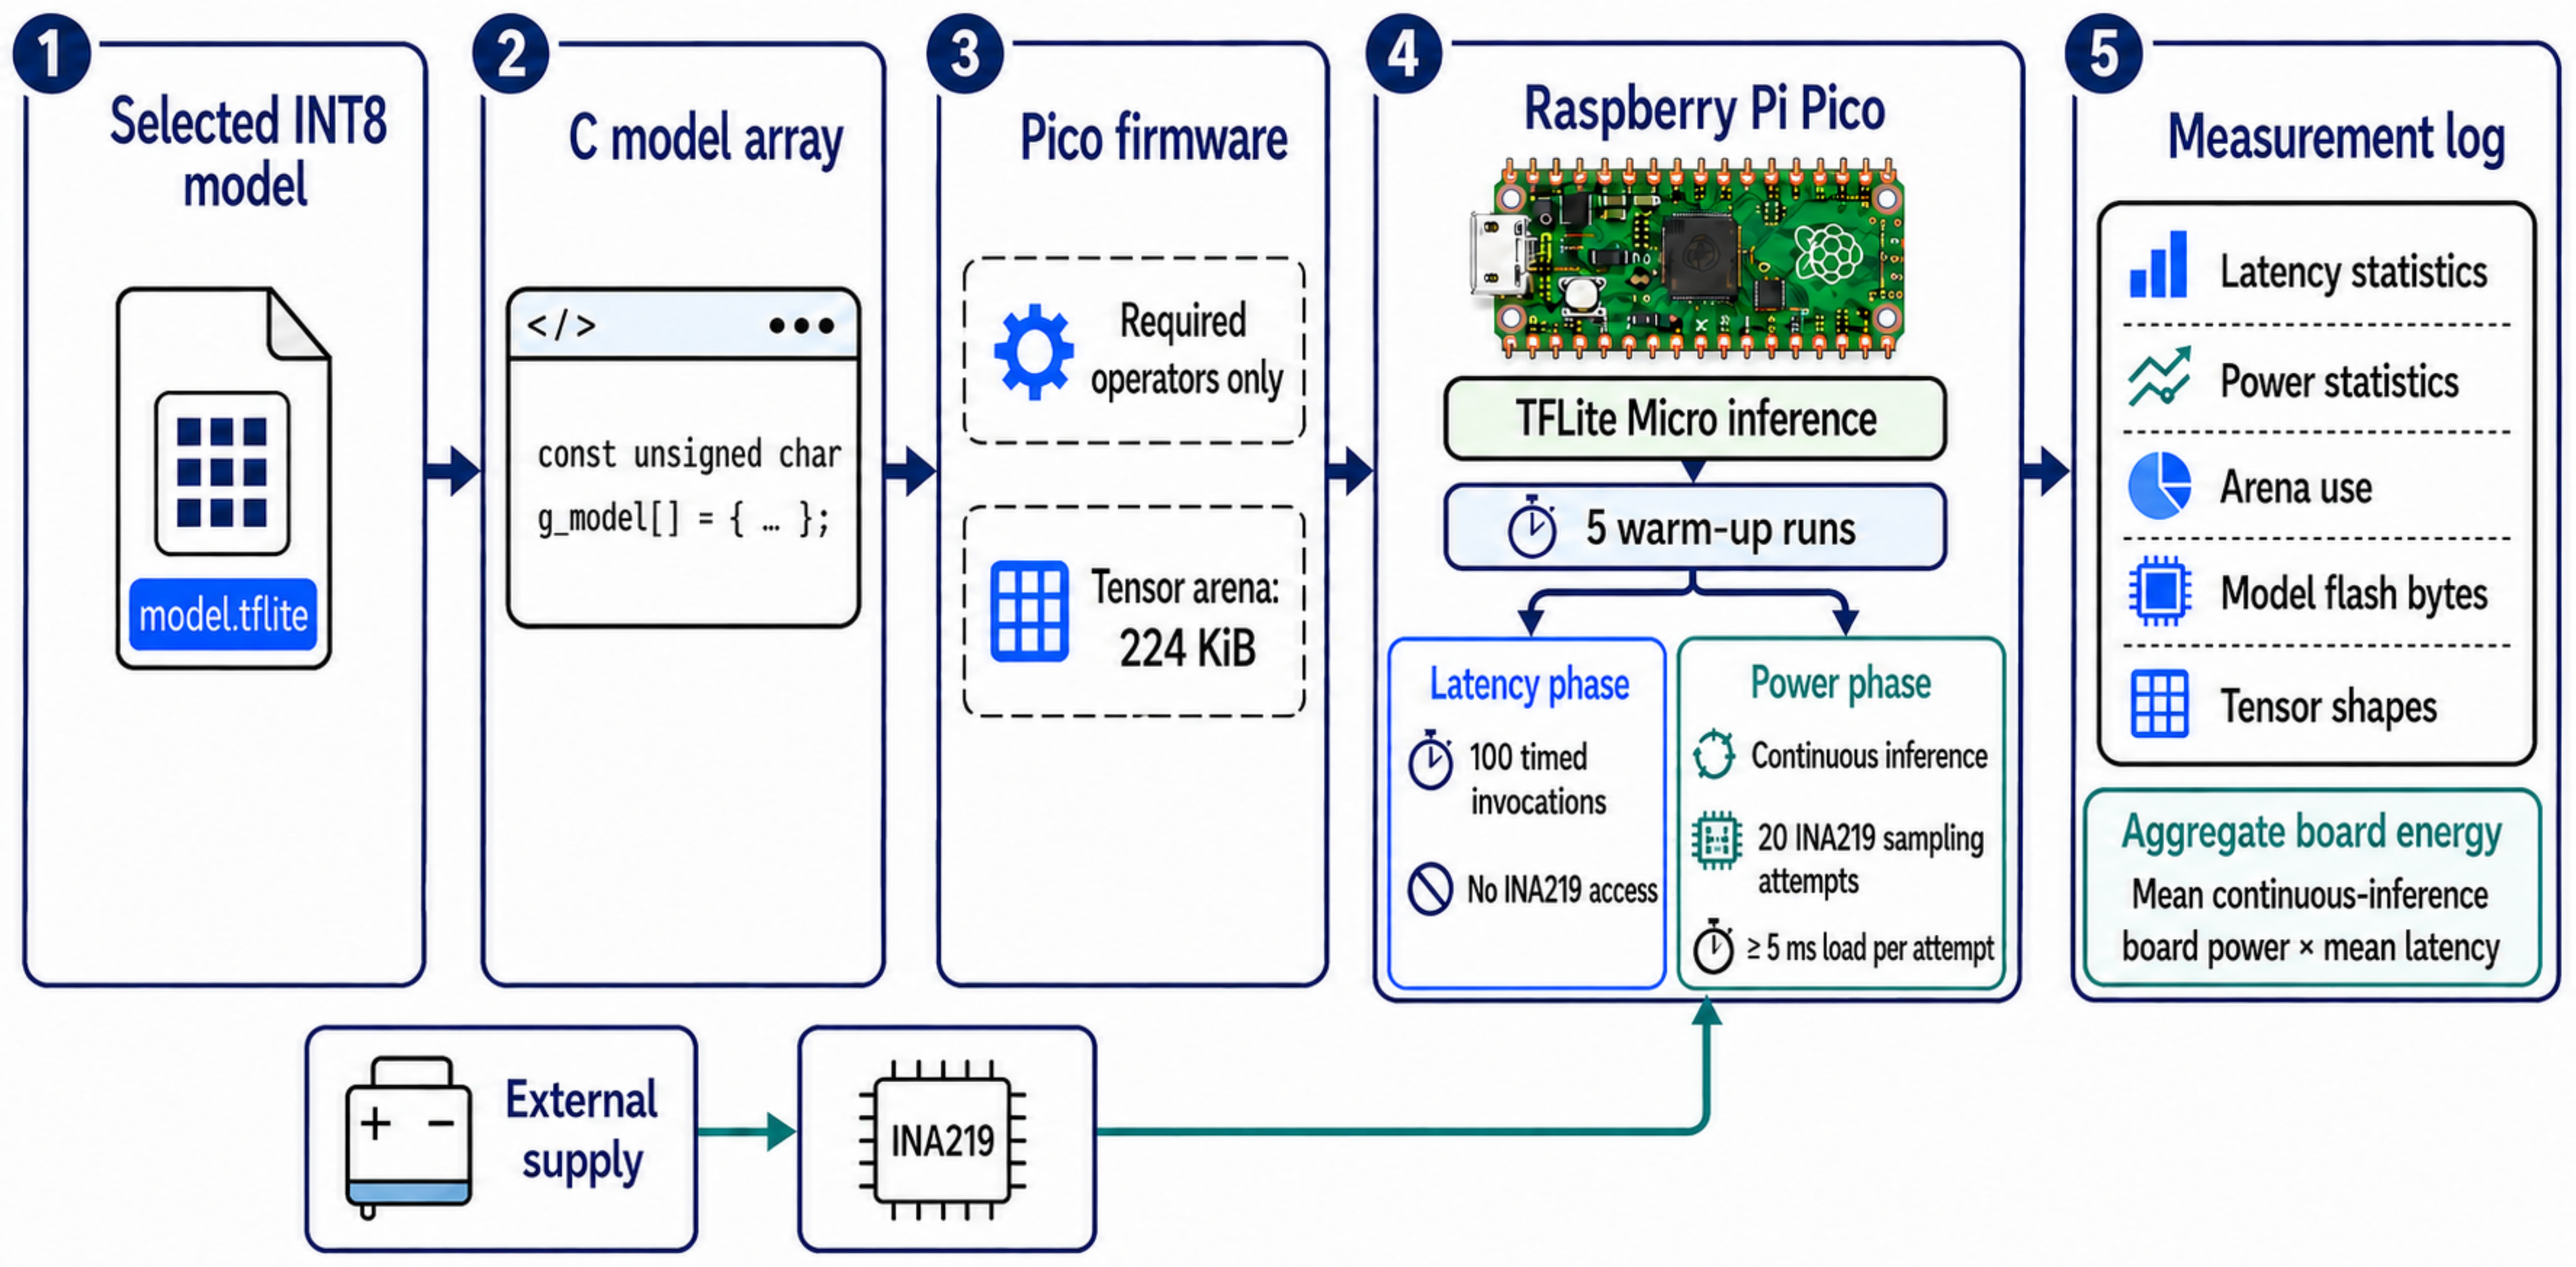

1
Selected INT8 model
model.tflite
2
C model array
</>
const unsigned char g_model[] = { … };
3
Pico firmware
Required operators only
Tensor arena: 224 KiB
4
Raspberry Pi Pico
TFLite Micro inference
5 warm-up runs
Latency phase
100 timed invocations
No INA219 access
Power phase
Continuous inference
20 INA219 sampling attempts
≥ 5 ms load per attempt
5
Measurement log
Latency statistics
Power statistics
Arena use
Model flash bytes
Tensor shapes
Aggregate board energy
Mean continuous-inference board power × mean latency
External supply
INA219