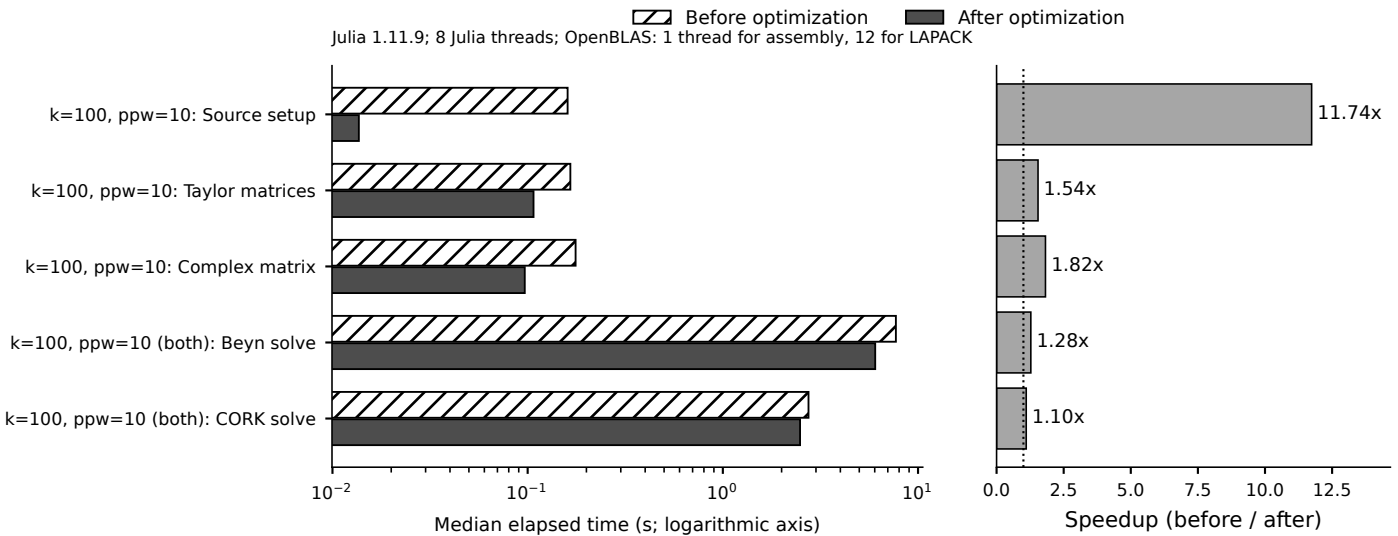

Purpose: compare the same weighted density space and numerical accuracy before and after optimization. Bars show paired warmed timing medians; speedup includes only the named part. Geometry, roots, filters and quadrature orders are retained. These timings measure implementation changes, separately from the saving due to fewer boundary nodes. Setup/matrix rows use one sector; full-solve rows sum both reflection sectors. Repetitions by row (top to bottom): 5, 5, 5, 3, 5.