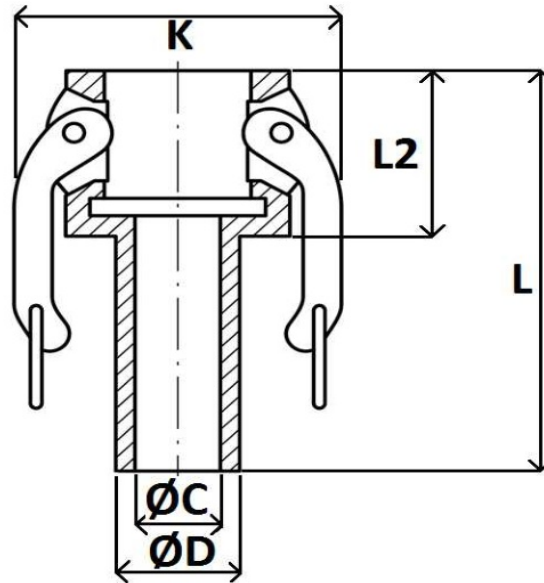


Raccords DIN EN 14420-7

Raccords CAMLOCK aluminium

CAMLOCK aluminium -coupleur femelle Type C
Page: 1/1

Norme: EN 14420-7 / DIN 2828

PN: 1/2": 150 PSI --- 3/4"-2": 250 PSI --- 3": 125 PSI --- 4": 100 PSI

RÉFÉRENCE	DN	DN	L	L2	ØC	ØD	K
CC3ALU	3"	80	160	62	68	77,5	130