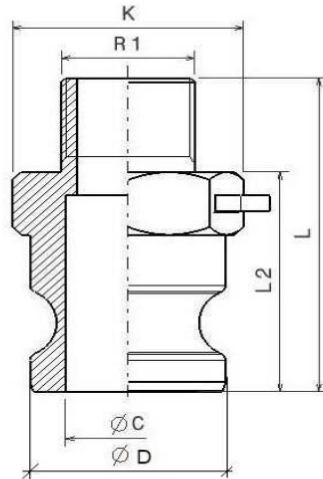


Raccords Camlock DIN EN 14420-7

Raccords Camlock AISI 316

Adapteur Camlock mâle BSPT Type F

Acier Inoxydable AISI 316

Page: 1/1


Normes: Filetage mâle selon EN10226-1
Filetage femelle selon ISO 228-1

PN: 1/2": 150 PSI --- 3/4"-2": 250 PSI --- 3": 125 PSI --- 4": 100 PSI

RÉFÉRENCE	DN	R1	L	L2	ØC	K	D
AM1/2INOX	12	1/2"	48	33	16	25	24
AM3/4INOX_Z	20	3/4"	56	38	21	32	32
AM11/4 INOX_Z	32	1"1/4	80	56	28,5	48	45
AM11/2INOX_Z	40	1"1/2	84	60	36	56	54
AM2INOX	50	2"	88	62	45	67	63
AM 2"1/2 INOX_Z	65	2"1/2	100	69	56,5	83	76