


Raccords DIN EN 14420-7
Raccords CAMLOCK laiton

CAMLOCK laiton -adapteur femelle Type D

Page: 1/1

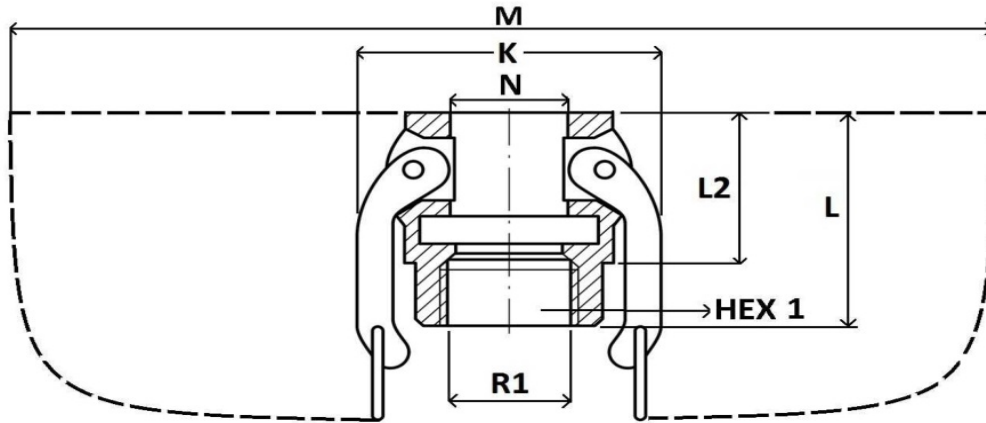

Norme: EN 14420-7 / DIN 2828

PN: 1/2 "- 4" 150 PSI ----- 5 "- 6" 75 PSI

Joint : JCAMNBR...

RÉFÉRENCE	DN	R1	L	L2	HEX 1	K	M	N
CF3/4 BR_Z	20	3/4"	45.31	30,74	33	52,1	112	32,3
CF1 BR_Z	25	1"	55.01	36,72	38	60,28	140	36,94
CF11/2 BR_Z	40	1" 1/2	61.32	42,1	53	84,91	180	53,86
CF21/2BR_Z	65	2" 1/2	80.05	54,2	80	109,5	200	16,99
CF3BR_Z	80	3"	84.04	53,12	94	130,44	240	92,2