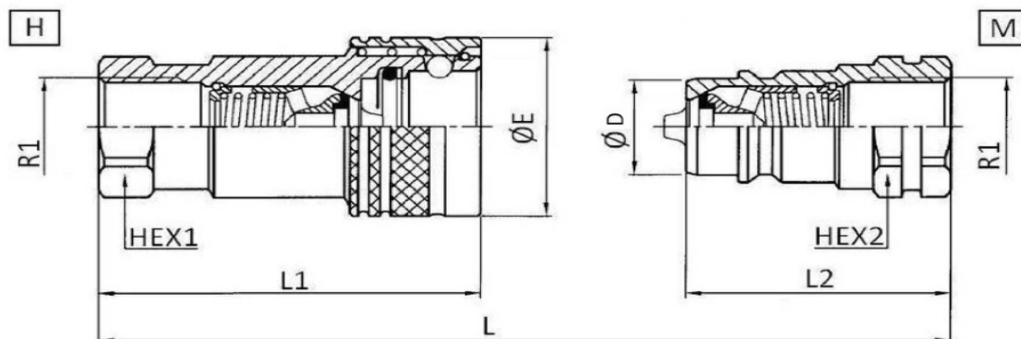


Acier Inoxydable AISI 316

1/1

Température de service: -25°C / +200°C

Matériaux des joints: FKM et PTFE

RÉFÉRENCE	R1	PRESSI ON DE SERVICE (BAR)	TAILLE ISO	TAILLE BG	COUPLEUR	S DÉBIT (L/MIN)	DÉBIT MAX (L/MIN)	L	L1	L2	HEX 1	HEX 2	ØD	ØE
HZ15021.ISOA	3/8" BSP	350	10	2	M	23	46	80		40		22	17,3	
HZ5032_Z	1/2" BSP	300	12,5	3	M	45	90	95		46		27	20,55	
HZ5042 DIC	3/4" BSP	250	20	4	M	106	190	108		53,5		32	29,1	
Hz5052 dic	1" BSP	170	25	5	M	189	280	126		63		41	34,35	
HZ15022.ISOA	3/8" BSP	350	10	2	H	23	46	80	57		22			30
HZ5031_Z	1/2" BSP	300	12,5	3	H	45	90	95	70		27			38
HZ5041 DIC	3/4" BSP	250	20	4	H	106	190	108	81		34			48
HZ5051 DIC	1" BSP	170	25	5	H	189	280	126	96		38			54