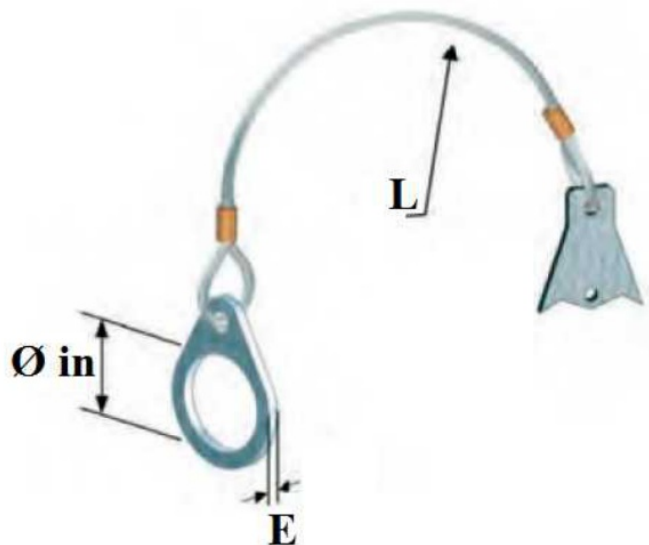


Acier au carbone

1/1


Normes: Testé pour assurer le maintien du tuyau jusqu'à la pression maximale en conformité avec les normes suivantes: EN 853, EN 854, EN 855, EN 856, EN857, SAE J517.

RÉFÉRENCE	Ø IN	DÉTAILS	PRESS. MAX. (BAR)	PRESS. MAX. (PSI)	E	L
CABLE SECU 1/4 8L	14.5	8L - 1/4"	450	6.525	2 mm	300
CABLE SECU 08S-10L 3/8	17	8S - 10L - 3/8"	445	6.453	2 mm	300
CABLE SECU 10S-12L	18.5	10S - 12L	420	6.090	2 mm	300
CABLE SECU 12S*	20.5	12S	420	6.090	2 mm	300
CABLE SECU 1/2 15L	22.5	14S - 15L - 1/2"	420	6.090	2 mm	300
CABLE SECU 16S	24.5	16S - 5/8"	420	6.090	2 mm	300
18L-3/4	26.5	18L - 3/4"	420	6.090	2 mm	300
CABLE SECU 20S*	30.5	20S - 22L	420	6.090	2,5 mm	300
CABLESECU6000 1*	34	1"	420	6.090	2,5 mm	450
CABLE SECU 25S-28L	36.5	25S - 28L	420	6.090	2,5 mm	450
CABLESECU30S1"1/4	42.5	30S - 1" 1/4	420	6.090	2,5 mm	450

RÉFÉRENCE	Ø IN	DÉTAILS	PRESS. MAX. (BAR)	PRESSION MAX. (PSI)	E	L
CABLE SECU 38S 42L*	52.5	38S - 42L	385	5.583	2,5 mm	450
CABLE SECU 2" _Z	60	2"	350	5.075	2,5 mm	450