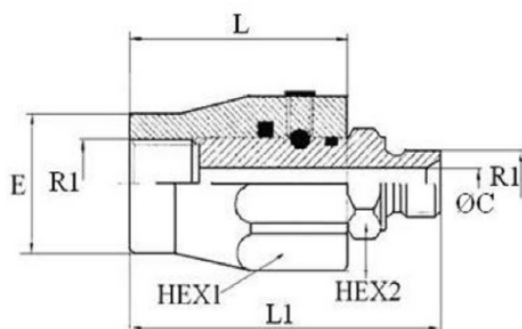
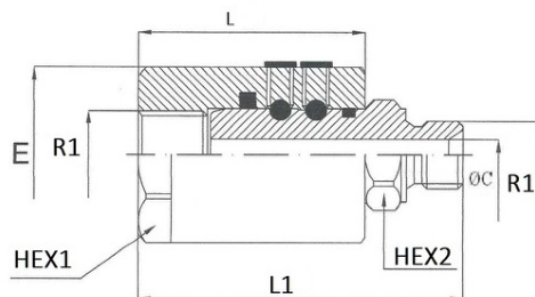


Acier au carbone

1/1

GGL 1/4" ... GGL 1/2"

GGL 3/4" ... GGL 2"

Temp: -20, +80 °C

O-rings: NBR

RÉFÉRENCE	R1	DÉBIT MAX (L/MIN)	PRESSION MAX. (BAR)	PRESS. MAX. EN ROTATION	L	L1	HEX 1	HEX 2	ØC	E
RT1/4	1/4" BSP	25	400	200	42	61	30	19	6	24
RT3/8	3/8" BSP	35	400	200	44	66	34	24	8,5	25
RT1/2	1/2" BSP	60	300	150	47	71	36	27	11,5	32
RT3/4	3/4" BSP	100	300	150	50	89	45	34	15	49,5
RT1*	1" BSP	180	300	100	57	98	50	41	21	54,5
RT1 1/4_Z	1 1/4" BSP	200	300	100	63	101	55	50	28	60