



RAFT Intersection Coordination: WAVE (IEEE 802.11p/ITS-G5) vs UDP (IEEE 802.11a)
Industry-Realistic PHY: $\alpha=2.75$ NLOS, LogNormal Shadowing $\sigma=4$ dB, Tx=20mW, 6 Mbps


RAFT Decision Time

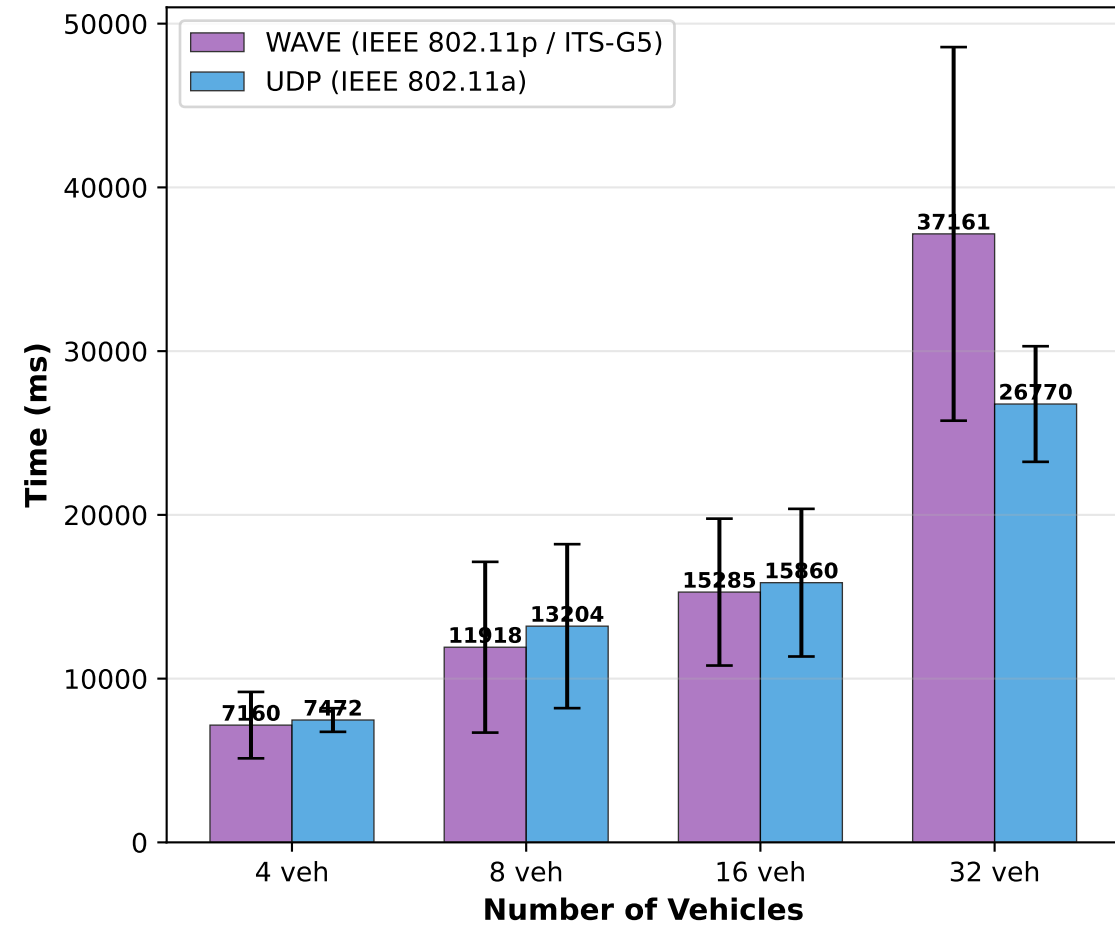


Total Intersection Time

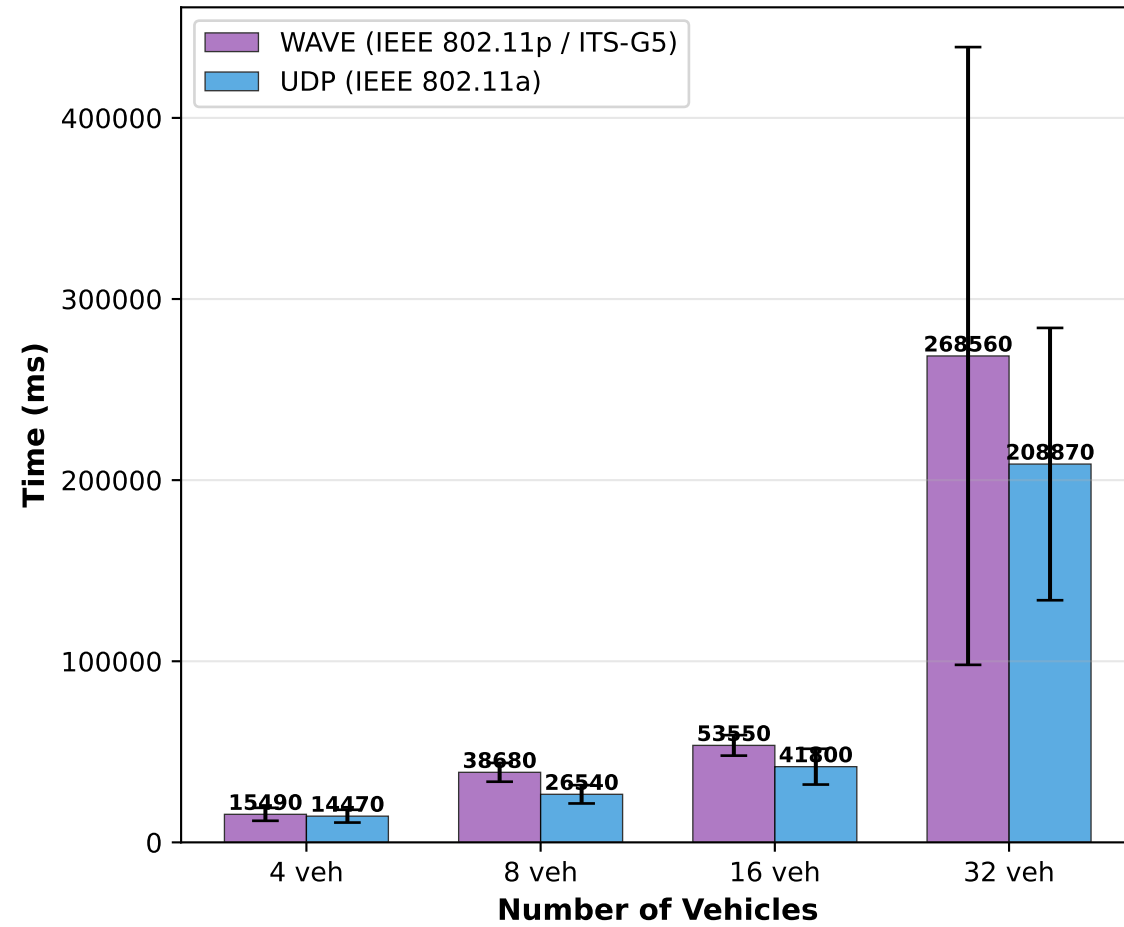


System Throughput

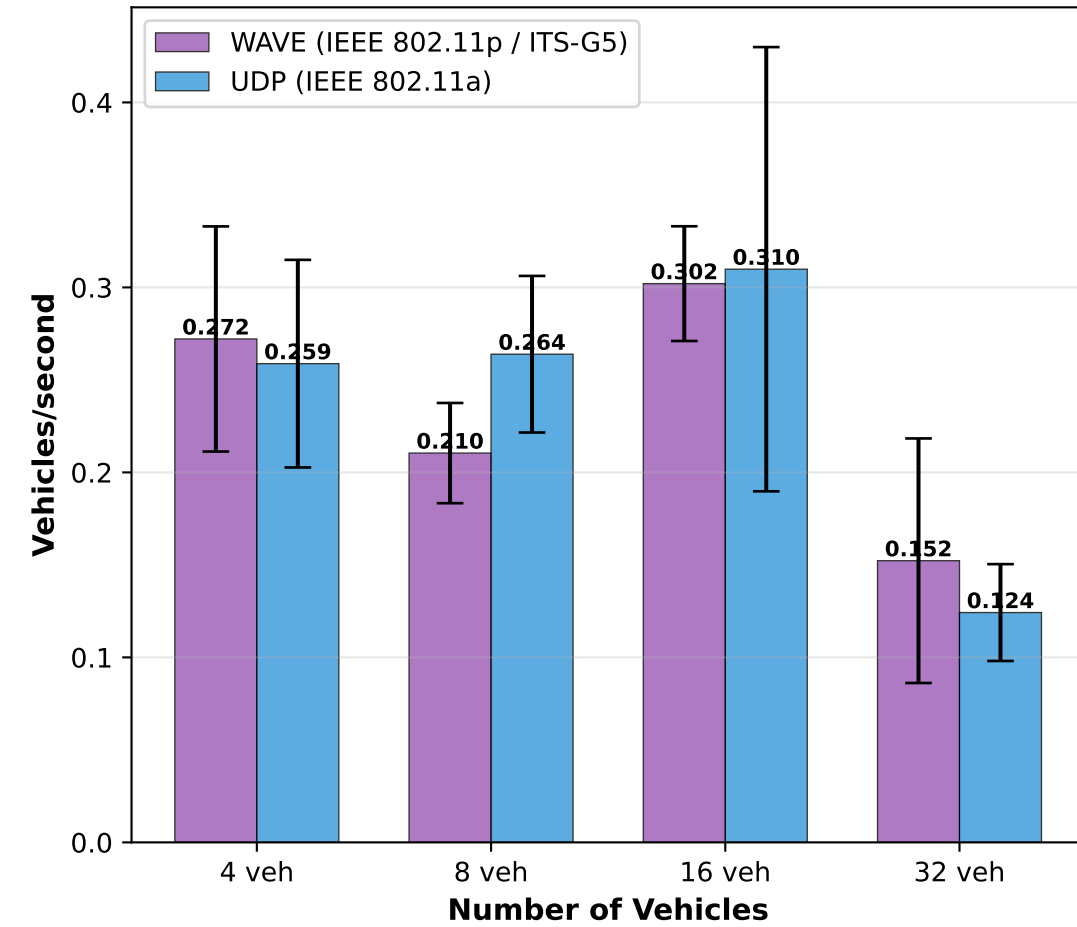

Average Wait Time

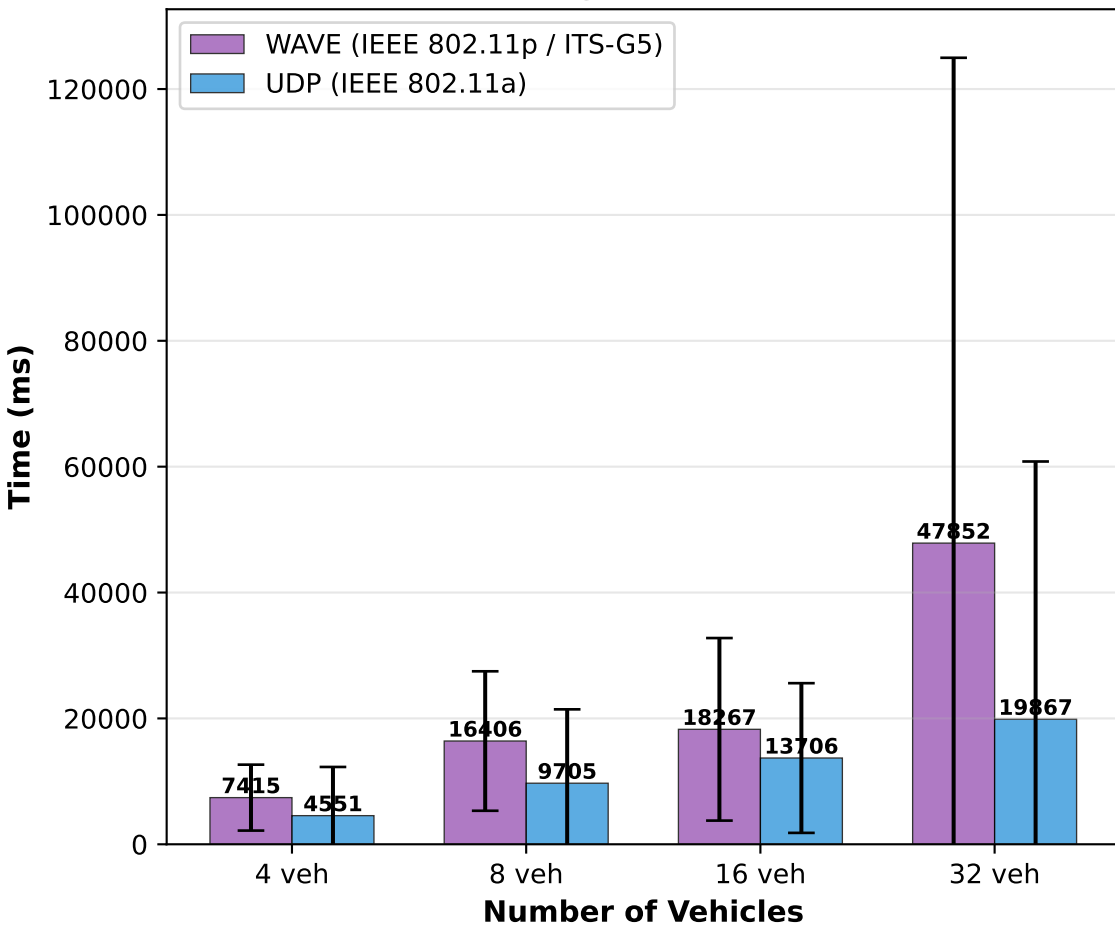

Average Transit Time

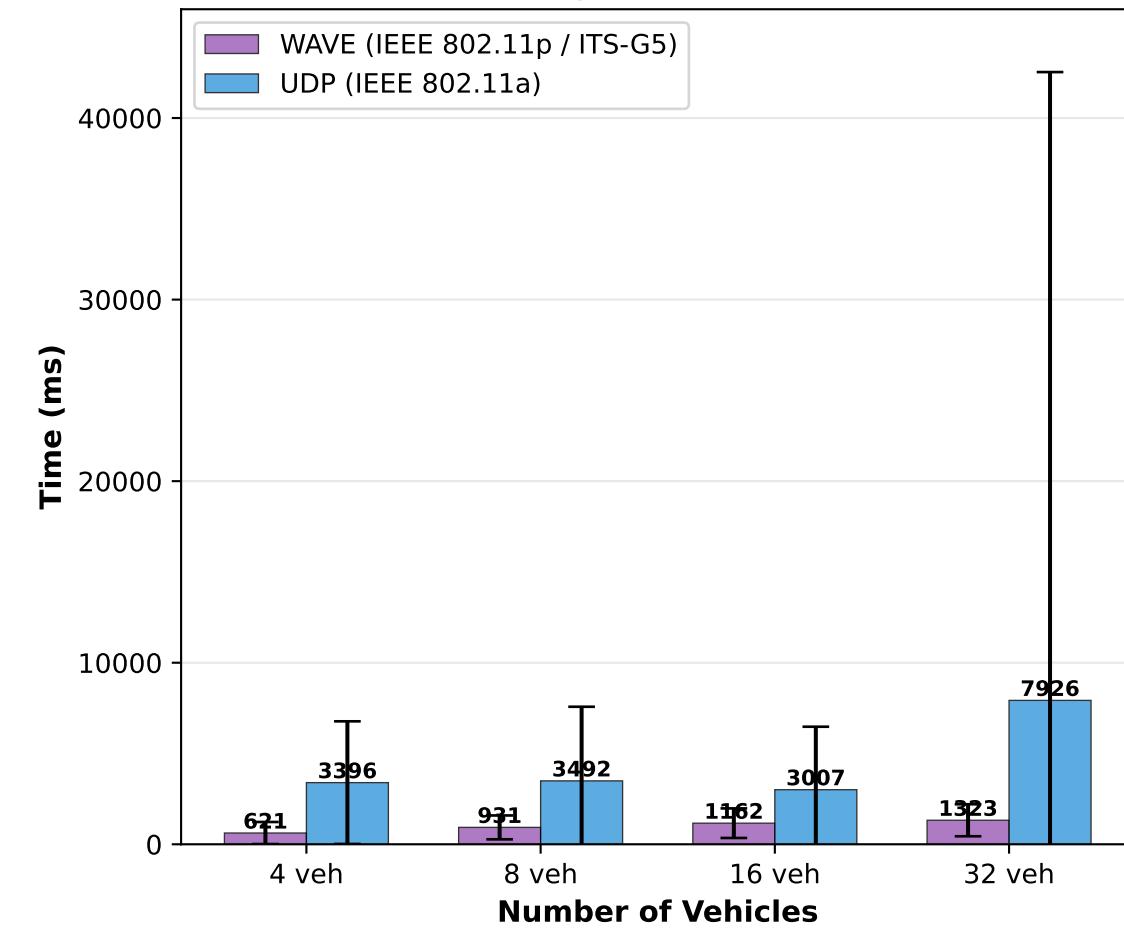

Messages Sent per Vehicle

