


RAFT Intersection Coordination: WAVE (IEEE 802.11p/ITS-G5) vs UDP (IEEE 802.11a)

Industry-Realistic PHY: $\alpha=2.75$ NLOS, LogNormal Shadowing $\sigma=4$ dB, Tx=20mW, 6 Mbps

RAFT Decision Time

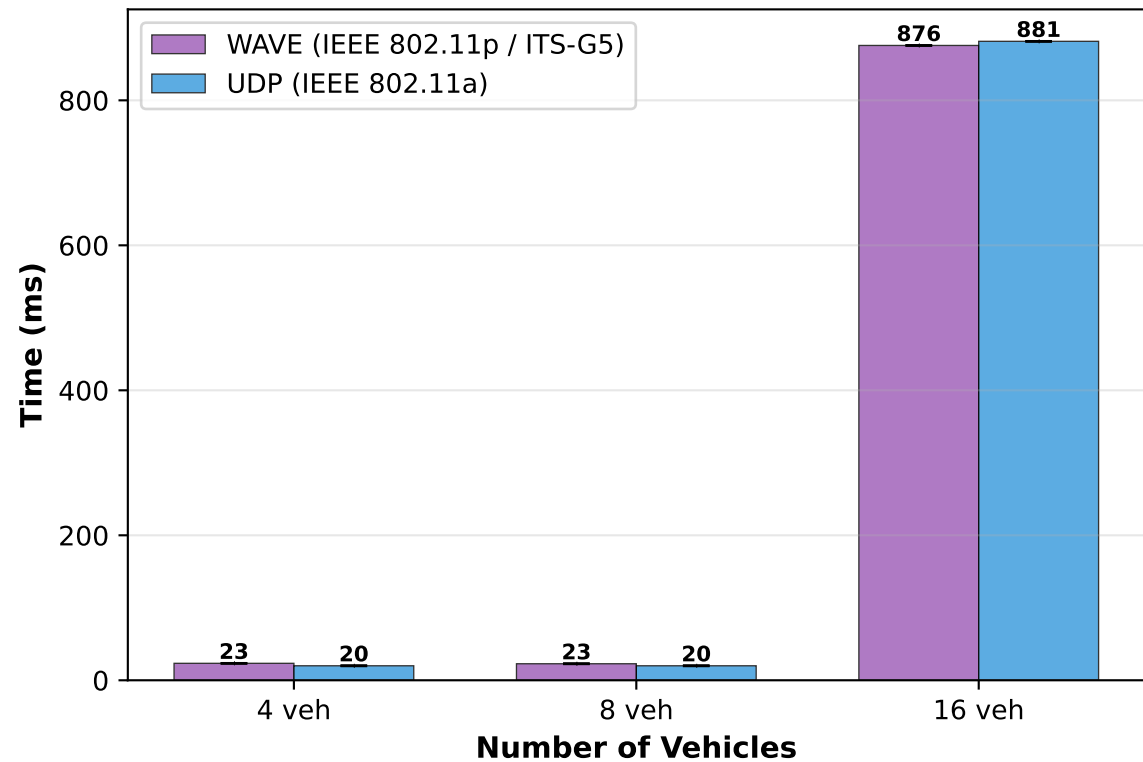

System Throughput

