


# RAFT Intersection Coordination: WAVE (IEEE 802.11p/ITS-G5) vs UDP (IEEE 802.11a)

Industry-Realistic PHY:  $\alpha=2.75$  NLOS, LogNormal Shadowing  $\sigma=4$ dB, Tx=20mW, 6 Mbps

## RAFT Decision Time

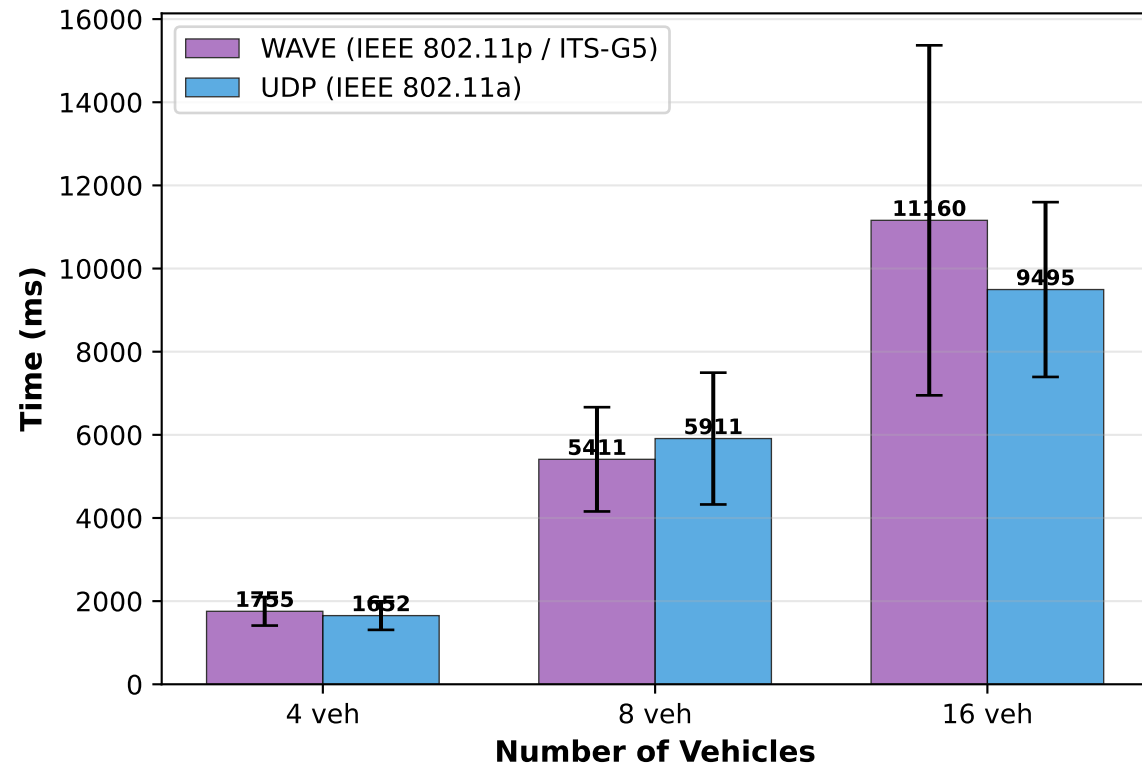

## System Throughput

