MEASURING THICKNESS PROFILE BETWEEN CLOSED CURVES APPLIED TO ENDOMETRITIS DETECTION IN CATTLE

M. Tailanián, A. Fernández, F. Lecumberry

G. Gnemmi

Facultad de Ingeniería, Universidad de la República Julio Herrera y Reissig 565, Montevideo, Uruguay Bovinevet Premosello Chiovenda (VB), Italy

ABSTRACT

In this paper we address the problem of defining and measuring a thickness profile between closed curves that do not intersect and one is interior to the other. Based on the normal evolution of curves, we developed an algorithm that defines the correspondence between points of different curves and measures the thickness profile. Ensuring in each step a good sampling of all curves by of creating and combining points, the algorithm splits the evolution in two parts, evolving from the convex hull of the interior curve to each one of the others. The thickness profile obtained is used to extract some features to detect a uterine disease (endometritis) in dairy cattle, based in ultrasound images. Some results of thickness profiles in real and sythetic curves are shown, as well as a preliminary endometritis diagnose using this features.

Index Terms— Curves evolution, thickness, distance, endometritis, ultrasound images.

1. INTRODUCTION

Given two closed curves, that do not intersect and one is interior to the other, this work addresses the problem of finding an entire thickness profile between them. Figure 1a shows a typical setting of the curves involved in the problem: Γ_1 , Γ_2 , Γ_3 . None of the curves is assumed to be convex, but typically Γ_1 and Γ_2 presents a smooth curvature variation, while Γ_3 (typically non convex) presents a high curvature variation and in some cases is even not differentiable in some points. The main goal is to define and measure the thickness profile of the regions between Γ_1 and Γ_2 , and between Γ_2 and Γ_3 .

In the literature there are some measures of distance between two curves, such as Housedorff [1], or Sobolev [2], providing a numeric value for the distance or dissimilarity between curves, but we are interested, as said, in the entire thickness profile. To compute the thickness of a region, the first question to ask is how to conceptually define the thickness between two curves. Several methods, like the one presented in [3], finds the correspondence between two morphologically different objects by the minimization of a similarity criterion function. Other methods resolve the correspondence by circle mapping [4]: the vertices of the origin and target curves




Fig. 1. Definitions. A schematic representation of the problem is shown in (a), while in (b) is presented a real example of the application. The region between Γ_1 and Γ_2 is called *Myometrium*, the region between Γ_2 and Γ_3 *Endometrium* and the region inside Γ_3 *Lumen*.

are projected on circles of the same radius, and then merged. The merged set of vertices are projected back onto each curve, obtaining curves with the same number of vertices, and in a pairwise correspondence. In this work we propose a simple algorithm that finds this correspondence in a natural way using curves evolution [5]. It is based on the normal evolution of the interior curve (the origin curve) and considers the other curve as target. In the evolution are included some mechanisms of creating and combining points to ensure a correct sampling at all steps. The thickness is measured as the length of the path in the evolution. This algorithm finds an intuitive correspondence between points of the different curves and leads to an appropriate thickness definition.

The application considered is to detect a common uterine disease (endometritis) in dairy cattle using ultrasound (US) images. The relation between some muscles thickness can be a relevant feature to diagnose this disease [6], so in this work we explore this possibility developing a system to measure this feature. In Figure 1b is shown a typical US image with the curves Γ_i , $i=1\ldots 3$ overprinted. Curves are always in this order and there is no intersection between them, since they are the limits of muscles and tissues in cattle uterine horns. Measuring the thickness profile of the Myometrium and Endometrium is the goal of this work.

The description of the particular problem considered and the proposal are presented in Section 2. In Section 3 are pre-




Fig. 2. Comparison between different proposals. (a) Distance function from the points in the outer curve to the inner curve. (b) Defining the middle curve as the curve equidistant to both curves, the thickness is measured as the length of the normal to the middle curve. (c) Proposal: the blue lines represent the path traveled by the original points during evolution, and the orange lines corresponds to points created during evolution, see Section 2.

sented results using synthetic and real curves and a final application to diagnose endometritis using descriptors extracted from the thickness profile. Finally, in Section 4 we present conclusions and future work.

2. PROBLEM DESCRIPTION AND PROPOSAL

2.1. Problem description

In order to understand the particular application considered it is important to define some concepts. In Figure 1b a transverse cut of cattle uterine horn is shown. We can imagine the uterine horn as a tube with two coatings: Endometrium and Myometrium. The Myometrium is the region delimited by Γ_1 and Γ_2 and the Endometrium is the region delimited by Γ_2 and Γ_3 . The problem is to measure the thickness of those two regions, using a manual segmentation of the regions. While searching for a definition of the distance between two curves, euclidean distance comes to head. In this case, for each point of curve Γ_i the nearest point of Γ_j is found and the euclidean distance between this two points is used as thickness. As can be seen in Figure 2a, this thickness definition cannot capture the curves "structure", deriving in a wrong profile. Another idea is to measure width in the normal direction of each point of the curve. Considering the normal to curve Γ_2 , we cannot ensure that this direction will intersect Γ_3 . With the purpose of obtaining a more regular curve and define the thickness in the normal direction of this new curve, we consider the skeleton of the region defined by Γ_2 and Γ_3 , defined as the curve Γ_{23} equidistant to both curves. The results of measuring the thickness in the normal direction of each point of Γ_{23} are not as expected and in some directions the normals do not intersect curve Γ_3 (See Figure 2b). Finally, in Figure 2c is presented our proposed algorithm. In this case, the "structure" of the curves are effectively captured, obtaining a distance between curves that can be interpreted as thickness.

Another possibility is to create synthetic images from the given curves in order to use other methods like GAC [7] o Chan-Vese [8], that uses image data to perform the evolution. However, this methods introduce other terms representing for example the curve regularity or area measures that are not

linked to the original problem and may hinder the real problem of measuring a region thickness.

2.2. Proposal

Our proposal is based on the simplest curves evolution: the normal evolution. Letting η be the evolution step and $\vec{n}_{p_i}^t$ the normal to the curve at the point p_i at time t, the evolution is governed by the equation:

$$p_i^{t+1} = p_i^t + \eta \ \vec{n}_{p_i}^t. \tag{1}$$

Due to the nature of the curves described in Section 1, considering the non convexity of the curves, we propose to perform a two step evolution, which in the final step are joined to obtain a single result. While measuring the thickness between Γ_m and Γ_{m-1} , if Γ_m is non convex, an auxiliary curve is considered: the convex hull of curve Γ_m (Γ_m^{CH}) [4]. The two steps of the evolution are: 1) Evolution from Γ_m^{CH} to Γ_m , and 2) Evolution from Γ_m^{CH} to Γ_{m-1} . The final width, or distance between curves, is calculated as the distance of the path traveled by each point of the curve. The original curves are created with a cubic interpolation of a few points indicated by the expert and then re-sampled according to curvature, using more points in regions with higher curvature. The sampling of Γ_m^{CH} is done by two different ways according to each point nature: points $p_i \in \Gamma_m$ that also belongs to $\Gamma_m^{\check{C}H}$ are directly used, and in regions where Γ_m do not match Γ_m^{CH} , an uniform sampling is performed such that both curves have the same number of points.

Sampling conditions are considered at each step to ensure a correct representation of the curve. For that purpose we developed a simple mechanism of creating and combining points while evolving the curve. At the beginning of the evolution, the mean distance, δ , between adjacent points is computed. The procedure of creating new points consists on evaluating at each evolution step t if the distance between two adjacent points p_i^t and p_{i+1}^t is greater than 2δ . In this case, a new point, p_k^t , is created between p_i^t and p_{i+1}^t as the middle point. p_k^t is initialized with the mean of the distance traveled by points p_i^t and p_{i+1}^t , see Figure 3a. The procedure to




Fig. 3. Mechanisms of creating and combining points during evolution. (a) A new point is created (red point) if the distance between adjacent points exceeds a predefined threshold. (b) Two points are combined if their normals normalized and multiplied by the step length intersect each other.

combine points is based on the evaluation of a proximity condition. If $\eta \frac{\vec{n}_{p_i}^{t-1}}{||\vec{n}_{p_i}^{t-1}||}$ and $\eta \frac{\vec{n}_{p_i+1}^{t-1}}{||\vec{n}_{p_i+1}^{t-1}||}$ are intersected, points p_i^t and p_{i+1}^t will be joined into a new one, placed in that intersection, see Figure 3b.

3. EXPERIMENTS AND RESULTS

3.1. Synthetic

In order to show the algorithm performance, a synthetic example is presented. This example was designed considering Γ_i , i=1...3 as three concentric circles and adding a perturbation in Γ_2 and Γ_3 . This perturbations are introduced by adding in the normal direction of each point of the curve a Gaussian distribution $X \sim \mathcal{N}(0,1)$ centered in points with null phase for Γ_2 and centered in the points with maximum (absolute) phase for Γ_3 . In the point where X is maximal, the width of the region delimited by Γ_1 and Γ_2 is equal to the width of the region delimited by Γ_2 and Γ_3 . The results are shown in Figure 4. Figure 4a shows the trajectory of the points while evolving. The trajectory of the original points is represented in blue color, while the trajectory of points created during evolution is represented in orange color. Figure 4b shows the thickness profile obtained relative to the angle measured from the center of the circles. As can be seen, the results are as expected. Near points with null phase, region between Γ_1 and Γ_2 presents a thickness decay while the region between Γ_2 and Γ_3 shows an increase. For the points with null phase and the points with maximal (absolute) phase the widths are equal.

3.2. Real

Postpartum uterine diseases, such as endometrium damage and ovarian cyclic activity disruption, has become one of the most important causes of reproductive inefficiency in dairy cattle and are associated with infertility [9, 10]. Endometritis is an uterine disease defined as inflammation limited to the

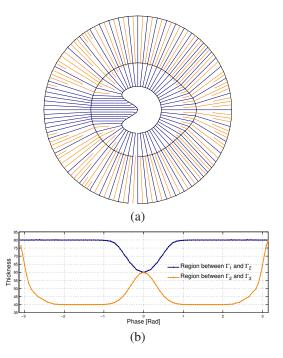


Fig. 4. Creation and combination of curve points. (a) Path traveled by points during the evolution. The blue lines corresponds to the evolution of the original points, while orange lines corresponds to created points. (b) Thickness profile relative to the angle measured from the center of the circles. In blue is shown the thickness of region between Γ_1 and Γ_2 , and in orange between Γ_2 and Γ_3 .

endometrium occurring at least 21 days after calving and not associated with systemic illness [11]. This disease do not always presents clinical symptoms, so sub-clinical Endometritis detection using ultrasonography images is used [6, 12]. The sub-clinical endometritis diagnostic is very difficult, even for an expert, so image processing techniques to aid veterinaries in diagnostics get special relevance.

In this section we present results obtained in real ultrasonography images. The curves were manually segmented by the expert and our algorithm applied to obtain the thickness profile. Results are shown in Figure 5 for three real examples.

3.3. Feature extraction and classification

The algorithm was applied to a database tagged by the expert, knowing which cows has sub-clinical endometritis. In a pre-liminary study of the problem the thickness profile obtained for each image was used to obtain some descriptors in order to perform an automatic supervised classification in two classes: cattle with or without endometritis. The extracted features try to simulate what the expert analyzes to diagnose: maximum thickness of endometrium normalized by endometrium area and maximum thickness of myometrium with and without the area normalization.

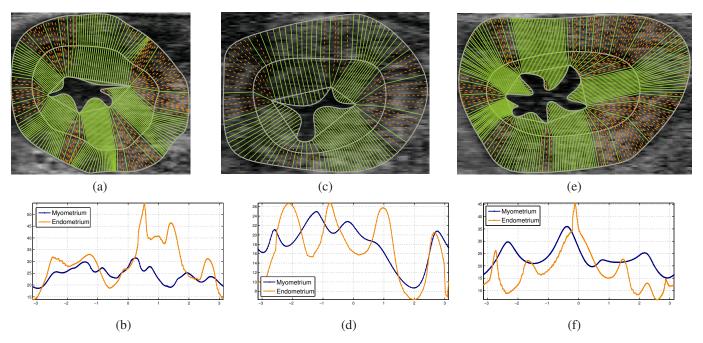


Fig. 5. Results on real images. Images shows three different real situations. In (a), (c) and (e) is shown the path traveled by points of curves during the evolution, and in (b), (d) and (f) their respective thickness profiles obtained. The blue line corresponds to the thickness between Γ_1 and Γ_2 , and the orange line corresponds to the thickness between Γ_2 and Γ_3 .

Performing a feature selection using a wrapper method and classification with multilayer perceptron, we obtained results that, although preliminary, seems to be very promissory. Using a 6-fold cross validation we were able to correctly classify 91.67% of instances, with a recall of 91.7% and a precision of 92.9%. This results are showing that the features obtained from the thickness profile, which could not be extracted using other measures such as euclidean distance, can play an important role in detecting sub-clinical endometritis.

4. CONCLUSION

In this work we present an algorithm to measure the thickness of a region delimited by two closed curves, without any regularity assumptions on the curves. The curves are sampled according to curvature and the algorithm is based on the normal evolution with constant velocity. Mechanisms of creating and combining points during evolution were designed and implemented, ensuring a good representation of the curve in each step. To deal with the "irregularity", meaning the high variation of curvature of a curve, the convex hull is considered as an auxiliary curve and the evolution is performed in two steps: evolving from the convex hull to the origin curve and evolving from the convex hull to the target curve. This algorithm leads to an intuitive thickness definition, and an entire thickness profile is obtained. When defining the thickness, the correspondence between the curves is not clear in other methods, but this algorithm finds a reasonable correspondence, resolving an entire mapping between curves.

The algorithm was applied to a particular problem, where the goal is to measure the thickness of a muscle of cattle uterus. This thickness appears to be very relevant to help the detection of a sub-clinical uterine disease: endometritis. Some descriptors were extracted from the thickness profile, and a simple classification system was implemented in order to classify sick cows. The results are very promissory, giving good prospects for automatic detection.

4.1. Future work

As future work we plan to explore in extracting better descriptors from the thickness profile and obtain other descriptors from the ultrasonographic images, such as texture or shape descriptors, in order to obtain a more accurate classification. Also we plan to enlarge the database.

5. ACKNOWLEDGMENTS

The author would like to thank Gregory Randall, PhD., Dra. Ana Meikle, PhD. and Dra. Isabel Pereira for their suggestions and fruitful discussions. This work was partially funded by project ANII FMV 2_2011_1_7376.

6. REFERENCES

[1] J.-M. Morel and S. Solimini, *Variational Methods in Image Segmentation*, Birkhauser Boston Inc., Cambridge, MA, USA, 1995.

- [2] G. Charpiat, O. Faugeras, R. Keriven, and P. Maurel, "Distance-based shape statistics," in *In Acoustics*, *Speech and Signal Processing*, 2006 (ICASSP 2006, 2006.
- [3] D. Meier and E. Fisher, "Parameter space warping: shape-based correspondence between morphologically different objects," *Medical Imaging, IEEE Transactions on*, vol. 21, no. 1, pp. 31–47, Jan 2002.
- [4] J. Gomes, L. Darsa, B. Costa, and L. Velho, *Warping and Morphing of Graphical Objects*, vol. 1, Morgan Kaufmann, 1998.
- [5] Frederic Cao, "Geometric curve evolution and image processing," 2003.
- [6] G. Gnemmi and C. Maraboli, "Endometrite subclinica nel bovino da latte.," Aug. 2010.
- [7] V. Caselles, R. Kimmel, and G. Sapiro, "Geodesic active contours," 1997.

- [8] T. F. Chan and L. A. Vese, "Active contours without edges," 2001.
- [9] I.M. Sheldon, E.J. Williams, A.N.A. Miller, D.M. Nash, and S. Herath, "Uterine diseases in cattle after parturition.," vol. 176, no. 1, pp. 115–21, Apr. 2008.
- [10] C.S. Barlund, T.D. Carruthers, C.L. Waldner, and C.W. Palmer, "A comparison of diagnostic techniques for postpartum endometritis in dairy cattle," vol. 69, pp. 714–723, 2008.
- [11] I.M. Sheldon, J. Cronin, L. Goetze, G. Donofrio, and H.J. Schuberth, "Defining Postpartum Uterine Disease and the Mechanisms of Infection and Immunity in the Female Reproductive Tract in Cattle," vol. 81, no. 6, pp. 1025–1032, 2010.
- [12] G. Gnemmi, E. Ferrari, and C. Maraboli, "Endometrite clinica e subclinica. Significato della diagnosi e prospettive terapeutiche.," Sept. 2013.