# GRIS – Detachment Inspection Checklist

| | |
|---|---|
| **Project:** | |
| **Unit:** | |
| **Remarks:** | |

| Position | Item | Potential Detachment Concern | Residual risk | Expected Qty | Pre-Test Qty Verified | Pre-Test Associated Control / Verification Point | | Pre-Test Remarks | Post-Test Qty Verified |
|---|---|---|---|---|---|---|---|---|---|
| 1 | Cover retaining screw | Backing out | Low | 8 | | Torque mark aligned | ☐ | | |
| | | | | | | Retention tape present and intact | ☐ | | |
| | | | | | | No visible loosening or backing out | ☐ | | |
| 2 | Module joining shoulder screw | Backing out | Low | 8 | | Torque level verified | ☐ | | |
| 3 | Extender retaining screw | Backing out | Very Low | 6 | | Torque level verified | ☐ | | |
| 4 | ELCID magnetic sensor fastening screw | Backing out / Pull-out | Very Low | 2 | | Torque level verified | ☐ | | |
| 5 | Motor cover screw | Backing out / Pull-out | Low | 8 | | Torque mark aligned | ☐ | | |
| | | | | | | Retention tape present and intact | ☐ | | |
| 6 | ELCID magnetic sensor | Fracture | Very Low | 2 | | No visible damage or degradation | ☐ | | |
| 7 | Camera retaining screw | Backing out / Pull-out | Low | 10 | | Torque mark aligned | ☐ | | |
| 8 | Gear cover | Fracture / Disengagement | Very Low | 2 | | Fit fully seated | ☐ | | |
| | | | | | | Retention tape present and intact | ☐ | | |
| 9 | Track belt | Derailment | Very Low | 2 | | | | | |
| 10 | Recovery hook | Backing out / Pull-out | Very Low | 2 | | Torque mark aligned | ☐ | | |
| 11 | Wheel axle shoulder screw | Backing out | Low | 6 | | Torque mark aligned | ☐ | | |
| 12 | Main connector housing screw | Backing out | Very Low | 2 | | Torque mark aligned | ☐ | | |
| | | | | | | Retention tape present and intact | ☐ | | |
| 13 | Main connector latch screw | Backing out | Very Low | 2 | | Mechanical retention engaged | ☐ | | |
| 14 | Bottom camera position locking screw | Backing out | Very Low | 2 | | Mechanical retention engaged | ☐ | | |
| 15 | Central slot guide | Disengagement | Very Low | 2 | | Fit fully seated | ☐ | | |
| | | | | | | No movement or disengagement | ☐ | | |
| 16 | Leaf spring retaining screw | Backing out | Low | 2 | | Torque mark aligned | ☐ | | |
| | | | | | | No visible loosening or backing out | ☐ | | |
| 17 | Leaf spring | Fracture | Very Low | 1 | | No cracks or permanent deformation | ☐ | | |
| 18 | Impactor grub screw | Backing out | Very Low | 2 | | Retention tape present and intact | ☐ | | |
| | | | | | | Light torque confirmation | ☐ | | |
| 19 | Track wheels | Fracture | Very Low | 6 | | No visible damage or degradation | ☐ | | |
| 20 | Magnets retaining screw | Backing out | Low | 8 | | Torque mark aligned | ☐ | | |
| 21 | Impact solenoid | Detachment | Very Low | 1 | | Fully seated in mount | ☐ | | |
| 22 | Camera lens | Backing out | Very Low | 6 | | No movement under light torque | ☐ | | |

| Pre-Test Verification | |
|---|---|
| **Verified by:** | |
| **Signature:** | |
| **Date:** | |

| Post-Test Verification | |
|---|---|
| **Verified by:** | |
| **Signature:** | |
| **Date:** | |

*SI ESTE DOCUMENTO SE ENCUENTRA IMPRESO SE CONSIDERA COPIA NO CONTROLADA*

## Position Identification

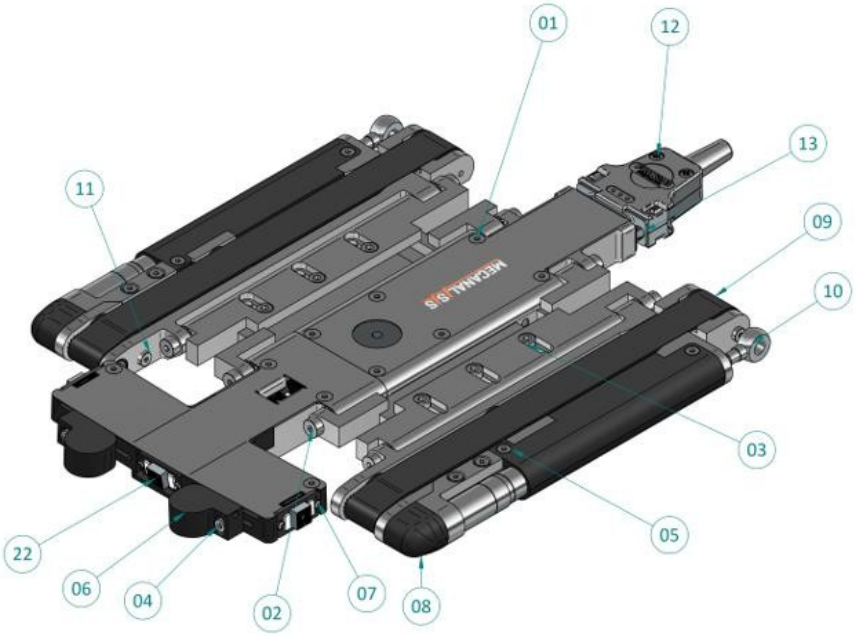



*Figure 1. Position Identification - GRIS isometric top view*

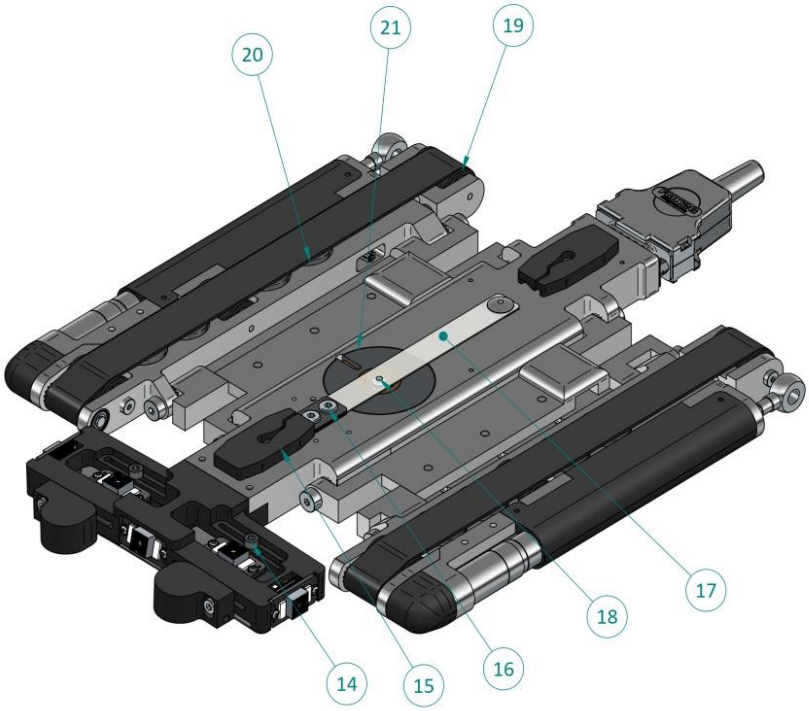



*Figure 2. Position Identification - GRIS isometric bottom view*



www.mecanalisis.com.ar | +54 261 476 9010
Pedro del Castillo 3160 . 5519 Guaymallén – Mendoza, Argentina.

MECANALISIS