



Catalogue

Item	Category	Model	Page
Impact Testing Machine Series			
Pendulum Semi-Automatic Impact Testing Machine	Semi-Automatic Impact Testing Machine	JB-300B/500B	6
	Digital Display Type	JB-300S/500S	6
	Computer Control Type	JB-300W/500W	6
Room-temperature Automatic Impact Testing Machine	Digital Display Type	JBS-300Z/500Z	7
	Computer Control Type	JBW-300Z/500Z	7
Low-temperature Automatic Impact Testing Machine	Digital Display Type	JBD-300S/500S	8
	Computer Control Type	JBD-300W/500W	8
Ultra low-temperature Automatic Impact Testing Machine	Digital Display Type	JBDS-300C/500C	9
	Computer Control Type	JBDW-300C/500C	9
750J Metal Pendulum Impact Testing Machine	Digital Display Type	JB-750S	10
	Computer Control Type	JB-750W	10
Manual Impact Testing Machine	Manual Impact Testing Machine	JB-300	11
Izod Impact Testing Machine	Izod Impact Testing Machine	JBN-300	12



Jinan Liangong Testing Technology Co.,Ltd

Item	Category	Model	Page
Pendulum Impact Testing Low-temperature Chamber		CDW-40/60/80/80T/100/100 (110) T/196/ CDW-196S	13-14
Impact Specimen Gap Broaching Machine	Double Knives Hydraulic Type	CSL-Y	14
	Single Knife Manual Type	CSL-A	15
	Double Knives Power-Driven Type	CSL-B	15
	Three Knives Power-Driven Type	CSL-B	16
Gap Projector	Impact Specimen Gap Projector	CST-50	17
Ferrite Steels Falling Sample Gap Sampling Machine		TLC-200T	18
Drop Weight Impact Test Low-temperature Chamber		LDW-80T	18
Drop Weight Tear Testing Machine		JL-3000, 6000, 8000, 30000, 40000, 50000, 80000	19
Electronic Universal Testing Machine Series			
Electronic Universal Testing Machine	Computer Control Electronic Universal Testing Machine	CMT-01L, 02L, 05L, 1L, 2L, 5L, 10, 20, 30, 50, 100, 200, 300	20-21
High and Low Temperature Test Chamber	Electronic Universal Testing Machine High and Low Temperature Test Chamber	GWX-300, GDX-30/300G, GDX-60/300G	22
High Temperature Furnace		WGW-900	23



Item	Category	Model	Page
Hydraulic Universal Testing Machine			
Hydraulic Universal Testing Machine	LCD Digital Display UTM	WES-100B, 300B, 600B, 1000B	24
	Computer Control Electro-hydraulic Servo UTM (E-Model, Grade 0.5)	WAW-4305-E, WAW-4605-E, WAW-4106-E, WAW-4206-E	25
	Computer Screen Display Hydraulic UTM	WEW-300B, 600B, 1000B, 2000B WEW-300C, WEW-600C, WEW-1000C	26
	Computer Control Electro-hydraulic Servo UTM (B-Model, Grade 1)	WAW-300B, 600B, 1000B, 2000B	27
Specialized Testing Machine Series			
Gauge Meter (Striking Machine) Series	Electric single point	DB-30	28
	Manual multi-point	DX-300	28
	Manual multi-point	DX-400	28
High Temperature Creep Testing Machine		CMT-6304-C, CMT-6504-C, CMT-6804-C, CMT-6105-C	29
Cupping Testing Machine	Computer Control Cupping Testing Machine	GBW-60B	30
	Computer Control Deep Drawing Cupping Testing Machine	GBC-60W	31
Bending Testing Machine	Steel Bar (Pipe) Bending Testing Machine	GW-40B /50B	31
	YGBW Series Steel Bar Bending Testing Machine	YGBW-50A	32
	Double Station Bending Testing Machine	GW-40Y	33
Power-Driven Metal Materials Repeated Bending Testing Machine		JWJ-10	34
Torsion Testing Machine		NDW-200 /500 /1000 /3000 /5000	35



Jinan Liangong Testing Technology Co.,Ltd

Item	Category	Model	Page
Pipe Ring Stiffness Testing Machine		CMT-H	36
Man-made Panel Universal Testing Machine		CMT-10B	37
Metal Wire Torsion and Winding Testing Machine		ER-10	38
Compression Testing Machine	Automatic Compression Testing Machine	YAW-300B YAW-2000 YAW-3000	39-40
	Automatic Compression - Flexural Testing Machine	YAW-300C	40
	Digital Display Compression Testing Machine	YES-2000, 3000	41
	Well Cover Compression Testing Machine	JYAW-600D/1000D/1500D	42
	CMT-ZY Carton Compression Testing Machine	CMT-ZY	43
Quenching Testing Bench		DZ-2, DZ-4, DZ-6	43
Computer Control Universal Friction and Wear Testing Machine		MMW-1A	44
Hardness Tester	Brinell Hardness Tester	HBS-3000B	45
	Rockwell Hardness Tester	HRS-150	45
	Vickers Hardness Tester	HVS-1000	46
Metallographic Products	Metallographic Specimen Cutting Machine	Q-2	46
	Metallographic Specimen Polishing Machine	P-2G	47
	Metallographic Specimen Grinding and Polishing Machine	MP-2	47
	Metallographic Specimen Mounting Press	XQ-2B	47
	Metallographic Microscope	4XC-W	48



Jinan Liangong Testing Technology Co.,Ltd

Plastic Impact Testing Machine Series	LCD Charpy & Izod Impact Testing Machine	XJ-50D	49
	Falling Hammer Impact Testing Machine	XJL-300B	50
	Manual Notch Sample Making Machine	QK-20	50
	Automatic Notch Sample-making Machine	ZQK-20	51
Brief introduction			





Jinan Liangong Testing Technology Co.,Ltd

Products Details

Item	Model	Main Technical Parameters	Reference Picture																																								
Pendulum Semi-Automa tic Impact Testing Machine	JB-300B JB-500B	Usage: The impact testing machine is used to test anti-impact performance of metal materials under dynamic load to judge the quality of material under dynamic load.																																									
	JB-300S JB-500S	<table><tr><td>Clutch Torque force</td><td colspan="2">630N.m</td><td colspan="2">1000N.m</td></tr><tr><td>Impact energy</td><td>300J</td><td>150J</td><td>500J</td><td>250J</td></tr><tr><td>Value of every grid</td><td>2J</td><td>1J</td><td>5J</td><td>2.5J</td></tr><tr><td>Pendulum Moment</td><td>160.7695N.m</td><td>80.3848N.m</td><td>267.9492N.m</td><td>133.9746N.m</td></tr><tr><td>Impact Speed</td><td colspan="2">5.2m/s</td><td colspan="2">5.4m/s</td></tr><tr><td>Distance between pendulum center and sample center</td><td colspan="2">750mm</td><td colspan="2">800mm</td></tr><tr><td>Pendulum Preparing angle</td><td colspan="4">150°</td></tr><tr><td>Sample seat span</td><td colspan="4">40mm</td></tr></table>	Clutch Torque force	630N.m		1000N.m		Impact energy	300J	150J	500J	250J	Value of every grid	2J	1J	5J	2.5J	Pendulum Moment	160.7695N.m	80.3848N.m	267.9492N.m	133.9746N.m	Impact Speed	5.2m/s		5.4m/s		Distance between pendulum center and sample center	750mm		800mm		Pendulum Preparing angle	150°				Sample seat span	40mm				
		Clutch Torque force	630N.m		1000N.m																																						
		Impact energy	300J	150J	500J	250J																																					
		Value of every grid	2J	1J	5J	2.5J																																					
		Pendulum Moment	160.7695N.m	80.3848N.m	267.9492N.m	133.9746N.m																																					
		Impact Speed	5.2m/s		5.4m/s																																						
		Distance between pendulum center and sample center	750mm		800mm																																						
		Pendulum Preparing angle	150°																																								
	Sample seat span	40mm																																									
	JB-300W JB-500W	<table><tr><td>Jaw fillet of specimen seat</td><td colspan="4">R (1.0 ~ 1.5) mm (1mm is special order)</td></tr><tr><td>The blade curvature radius</td><td colspan="4">R (2.0 ~ 2.5) mm (8mm is special order)</td></tr><tr><td>Sample size</td><td colspan="4">10 *10 (7.5 or 5) * 55 mm</td></tr><tr><td>Power supply</td><td colspan="2">380V 50Hz 250W</td><td colspan="2">380V 50Hz 380W</td></tr></table>	Jaw fillet of specimen seat	R (1.0 ~ 1.5) mm (1mm is special order)				The blade curvature radius	R (2.0 ~ 2.5) mm (8mm is special order)				Sample size	10 *10 (7.5 or 5) * 55 mm				Power supply	380V 50Hz 250W		380V 50Hz 380W																						
		Jaw fillet of specimen seat	R (1.0 ~ 1.5) mm (1mm is special order)																																								
		The blade curvature radius	R (2.0 ~ 2.5) mm (8mm is special order)																																								
		Sample size	10 *10 (7.5 or 5) * 55 mm																																								
		Power supply	380V 50Hz 250W		380V 50Hz 380W																																						



Jinan Liangong Testing Technology Co., Ltd.







Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference	Reference Picture																										
Ultra low-temperature Automatic Impact Testing Machine	JBDS-300C JBDS-500C	Usage: The impact testing machine is used to test anti-impact performance of metal materials under dynamic load to judge the quality of material under dynamic load.	 Jinan Liangong Testing Technology Co., Ltd.																										
		<table><tr><td>Clutch Torque force</td><td colspan="2">630N.m</td><td colspan="2">1000N.m</td></tr><tr><td>Impact energy</td><td>300J</td><td>150J</td><td>500J</td><td>250J</td></tr><tr><td>Value of every grid</td><td>2J</td><td>1J</td><td>5J</td><td>2.5J</td></tr><tr><td>Pendulum Moment</td><td>160.7695N.m</td><td>80.3848N.m</td><td>267.9492N.m</td><td>133.9746N.m</td></tr></table>		Clutch Torque force	630N.m		1000N.m		Impact energy	300J	150J	500J	250J	Value of every grid	2J	1J	5J	2.5J	Pendulum Moment	160.7695N.m	80.3848N.m	267.9492N.m	133.9746N.m						
		Clutch Torque force		630N.m		1000N.m																							
		Impact energy		300J	150J	500J	250J																						
		Value of every grid		2J	1J	5J	2.5J																						
	Pendulum Moment	160.7695N.m	80.3848N.m	267.9492N.m	133.9746N.m																								
	<table><tr><td>Impact Speed</td><td>5.2m/s</td><td>5.4m/s</td></tr></table>	Impact Speed	5.2m/s	5.4m/s																									
	Impact Speed	5.2m/s	5.4m/s																										
	<table><tr><td>Distance between pendulum center and sample center</td><td>750mm</td><td>800mm</td></tr></table>	Distance between pendulum center and sample center	750mm	800mm																									
	Distance between pendulum center and sample center	750mm	800mm																										
	<table><tr><td>Pendulum Preparing angle</td><td>150°</td></tr></table>	Pendulum Preparing angle	150°																										
	Pendulum Preparing angle	150°																											
	JBDW-300C JBDW-500C	<table><tr><td>Sample seat span</td><td>40mm</td></tr><tr><td>Jaw fillet of specimen seat</td><td>R (1.0 ~ 1.5) mm (1mm is special order)</td></tr><tr><td>The blade curvature radius</td><td>R (2.0 ~ 2.5) mm (8mm is special order)</td></tr><tr><td>Impact of the blade angle</td><td>30°</td></tr><tr><td>Impact blade thickness</td><td>16mm</td></tr><tr><td>Specimen holder support surface angle</td><td>11°</td></tr><tr><td>Cooling method</td><td>Room temperature -80°C Compressor cooling; -80°C~-196°C liquid nitrogen</td></tr><tr><td>Sample size</td><td>10 x 10 (7.5 or 5) * 55 mm</td></tr><tr><td>Feeding speed</td><td>≤4s</td></tr><tr><td>Low temperature range</td><td>Room temperature ~ -196°C</td></tr><tr><td>Sample box capacity</td><td>10</td></tr><tr><td>Overall dimensions</td><td>800*500*1275mm</td></tr><tr><td>Power supply</td><td>380V 50Hz 2.5kw/0.5kw</td></tr></table>	Sample seat span	40mm	Jaw fillet of specimen seat	R (1.0 ~ 1.5) mm (1mm is special order)	The blade curvature radius	R (2.0 ~ 2.5) mm (8mm is special order)	Impact of the blade angle	30°	Impact blade thickness	16mm	Specimen holder support surface angle	11°	Cooling method	Room temperature -80°C Compressor cooling; -80°C~-196°C liquid nitrogen	Sample size	10 x 10 (7.5 or 5) * 55 mm	Feeding speed	≤4s	Low temperature range	Room temperature ~ -196°C	Sample box capacity	10	Overall dimensions	800*500*1275mm	Power supply	380V 50Hz 2.5kw/0.5kw	 Jinan Liangong Testing Technology Co., Ltd.
		Sample seat span	40mm																										
		Jaw fillet of specimen seat	R (1.0 ~ 1.5) mm (1mm is special order)																										
		The blade curvature radius	R (2.0 ~ 2.5) mm (8mm is special order)																										
		Impact of the blade angle	30°																										
		Impact blade thickness	16mm																										
		Specimen holder support surface angle	11°																										
		Cooling method	Room temperature -80°C Compressor cooling; -80°C~-196°C liquid nitrogen																										
		Sample size	10 x 10 (7.5 or 5) * 55 mm																										
		Feeding speed	≤4s																										
		Low temperature range	Room temperature ~ -196°C																										
		Sample box capacity	10																										
		Overall dimensions	800*500*1275mm																										
		Power supply	380V 50Hz 2.5kw/0.5kw																										



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference	Reference Picture																																																																																				
750J Metal Pendulum Impact Testing Machine	JB-750S JB-750W	Usage: The impact testing machine is used to test anti-impact performance of metal materials under dynamic load to judge the quality of material under dynamic load.	 Jinan Liangong Testing Technology Co., Ltd.																																																																																				
		<table><tr><td>Model</td><td colspan="5">JB-750S/W</td></tr><tr><td>Impact energy</td><td>150J</td><td>300J</td><td>450J</td><td>600J</td><td>750J</td></tr><tr><td>Pendulum Moment</td><td>80.3848 N.m</td><td>160.7695 N.m</td><td>241.1543 N.m</td><td>321.5390 N.m</td><td>401.9238 N.m</td></tr><tr><td>Impact Speed</td><td colspan="5">5.24m/s</td></tr><tr><td>Distance between pendulum center and sample center</td><td colspan="5">750mm</td></tr><tr><td>Pendulum Preparing angle</td><td colspan="5">150°</td></tr><tr><td>Sample seat span</td><td colspan="5">40mm</td></tr><tr><td>Arc radius of end region of support</td><td colspan="5">(1.0 ~ 1.5) mm</td></tr><tr><td>Arc radius of striking knife</td><td colspan="5">(2.0 ~ 2.5) mm</td></tr><tr><td>Impact of the blade angle</td><td colspan="5">30°</td></tr><tr><td>Impact blade thickness</td><td colspan="5">16mm</td></tr><tr><td>Specimen holder support surface angle</td><td colspan="5">11°</td></tr><tr><td>Sample size</td><td colspan="5">10 * 10 (7.5 or 5) * 55 mm</td></tr><tr><td>Power supply</td><td colspan="5">380V 50Hz 1Kw</td></tr></table>		Model	JB-750S/W					Impact energy	150J	300J	450J	600J	750J	Pendulum Moment	80.3848 N.m	160.7695 N.m	241.1543 N.m	321.5390 N.m	401.9238 N.m	Impact Speed	5.24m/s					Distance between pendulum center and sample center	750mm					Pendulum Preparing angle	150°					Sample seat span	40mm					Arc radius of end region of support	(1.0 ~ 1.5) mm					Arc radius of striking knife	(2.0 ~ 2.5) mm					Impact of the blade angle	30°					Impact blade thickness	16mm					Specimen holder support surface angle	11°					Sample size	10 * 10 (7.5 or 5) * 55 mm					Power supply	380V 50Hz 1Kw				
		Model		JB-750S/W																																																																																			
		Impact energy		150J	300J	450J	600J	750J																																																																															
		Pendulum Moment		80.3848 N.m	160.7695 N.m	241.1543 N.m	321.5390 N.m	401.9238 N.m																																																																															
		Impact Speed		5.24m/s																																																																																			
		Distance between pendulum center and sample center		750mm																																																																																			
		Pendulum Preparing angle		150°																																																																																			
		Sample seat span		40mm																																																																																			
		Arc radius of end region of support		(1.0 ~ 1.5) mm																																																																																			
		Arc radius of striking knife		(2.0 ~ 2.5) mm																																																																																			
		Impact of the blade angle		30°																																																																																			
		Impact blade thickness		16mm																																																																																			
		Specimen holder support surface angle		11°																																																																																			
		Sample size		10 * 10 (7.5 or 5) * 55 mm																																																																																			
		Power supply		380V 50Hz 1Kw																																																																																			



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference	Reference Picture		
Manual Impact Testing Machine	JB-300	Usage: The impact testing machine is used to test anti-impact performance of metal materials under dynamic load to judge the quality of material under dynamic load.	 Jinan Liangong Testing Technology Co., Ltd.		
		Impact energy		300J	150J
		Pendulum Moment		160.7695N.m	80.3848N.m
		Impact Speed		5.0m/s	
		Distance between pendulum center and sample center		800mm	
		Pendulum Preparing angle		135°	
		Sample seat span		40mm	
		Jaw fillet of specimen seat		R (1.0 ~ 1.5) mm (1mm is special order)	
		The blade curvature radius		R (2.0 ~ 2.5) mm (8mm is special order)	
		Sample size		10 *10 (7.5 or 5) * 55 mm	
		Power		Manual operation, without power	
		Weight		320kg	



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference	Reference Picture																																				
Izod Impact Testing Machine	JBN-300	Usage: The impact testing machine is used to test anti-impact performance of metal materials under dynamic load to judge the quality of material under dynamic load.	 Jinan Liangong Testing Technology Co.,Ltd																																				
		<table><tr><td>Impact energy</td><td>300J</td><td>150J</td></tr><tr><td>Pendulum Moment</td><td>179.20N.m</td><td>89.60N.m</td></tr><tr><td>Impact Speed</td><td colspan="2">3.98 m/s</td></tr><tr><td>Distance between pendulum center and sample center</td><td colspan="2">475mm</td></tr><tr><td>Specimen and distance of pendulum contact wires to the symmetry of gap</td><td colspan="2">22±0.5mm</td></tr><tr><td>Pendulum Preparing angle</td><td colspan="2">135°</td></tr><tr><td>Pendulum Apex Angle</td><td colspan="2">75±1°</td></tr><tr><td>Pendulum circle radius</td><td colspan="2">0.5~1mm</td></tr><tr><td>The angle of Sample front and pendulum underside</td><td colspan="2">100±1°</td></tr><tr><td>Sample specifications</td><td colspan="2">Square sample 10*10*70~126mm Circular sample Φ 11.43*71~127mm</td></tr><tr><td>Net weight</td><td colspan="2">450kg</td></tr><tr><td>Power</td><td colspan="2">three-phase four-wire system 50Hz 380V 250W</td></tr></table>		Impact energy	300J	150J	Pendulum Moment	179.20N.m	89.60N.m	Impact Speed	3.98 m/s		Distance between pendulum center and sample center	475mm		Specimen and distance of pendulum contact wires to the symmetry of gap	22±0.5mm		Pendulum Preparing angle	135°		Pendulum Apex Angle	75±1°		Pendulum circle radius	0.5~1mm		The angle of Sample front and pendulum underside	100±1°		Sample specifications	Square sample 10*10*70~126mm Circular sample Φ 11.43*71~127mm		Net weight	450kg		Power	three-phase four-wire system 50Hz 380V 250W	
		Impact energy		300J	150J																																		
		Pendulum Moment		179.20N.m	89.60N.m																																		
		Impact Speed		3.98 m/s																																			
		Distance between pendulum center and sample center		475mm																																			
		Specimen and distance of pendulum contact wires to the symmetry of gap		22±0.5mm																																			
		Pendulum Preparing angle		135°																																			
		Pendulum Apex Angle		75±1°																																			
		Pendulum circle radius		0.5~1mm																																			
		The angle of Sample front and pendulum underside		100±1°																																			
		Sample specifications		Square sample 10*10*70~126mm Circular sample Φ 11.43*71~127mm																																			
		Net weight		450kg																																			
		Power		three-phase four-wire system 50Hz 380V 250W																																			



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference						Reference Picture	
Pendulum Impact Testing Low-temperature Chamber	CDW-40/60/80 CDW-80T CDW-100/(10) T CDW-196	Usage: Keep the sample cooling and insulation in the metal low temperature impact test.						 Jinan Liangong Testing Technology Co., Ltd.  Jinan Liangong Testing Technology Co., Ltd.  Jinan Liangong Testing Technology Co., Ltd.  Jinan Liangong Testing Technology Co., Ltd.	
		Specifications	CDW-40	CDW-60	CDW-80	CDW-80T	CDW-100(110)T		CDW-196
		Temperature range	Room temperature ~-40℃	Room temperature ~-60℃	Room temperature ~-80℃		Room temperature ~-100(110)℃		Room temperature ~-196℃
		Temperature control accuracy	±0.5℃						±2℃
		Cold room volume	275*160*120mm						
		Dimensions(mm)	910*510*920		710*600*740		1300*800*1000		710*600*740
		Box material	Iron Spray		Stainless steel		Iron Spray		Stainless steel
		Specimen quantity	No less than 60						
		Mode of refrigeration	Compressor refrigeration						Liquid nitrogen refrigeration
		Cooling medium	Ethanol or other unfrozen liquid						Liquid nitrogen
		Power	1.8kW	2.3kW	2.5kW		3kW		100W
		Remarks: The cold room volume can be specially manufactured according to the customers requirement.							



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference	Reference Picture	
Pendulum Impact Testing Low-temperature Chamber	CDW-196S	Usage: Metal low temperature impact test the best sample cooling, insulation equipment, also can be used for other low temperature testing and testing work.	 Jinan Liangong Testing Technology Co., Ltd	
		Specifications		CDW-196S
		Temperature range (continuous adjustable setting) (room temperature of 25℃)		-40℃~-180℃ (limit-196℃)
		Temperature accuracy		±2℃
		Dimensions(L*W*H)		960*510*580mm
		Quantity of sample can be loaded		20 (the impact sample size:10*10*55mm)
		Cooling medium		Liquid nitrogen
		Power		220V~240V,50Hz,100W
Impact Specimen Gap Broaching Machine	CSL-Y	Usage: Processing qualified Charpy impact specimen gap.	 Jinan Liangong Testing Technology Co., Ltd.	
		Model		CSL-Y
		Gap in the shape of the specimen		V-or U-(2mm)
		Processing the sample size		10*10(7.5 or 5)*55mm
		Driving ways		Hydraulic
		Broach speed		2.5m/min
		Broach stroke		350mm
		Broach Materials		W18Cr4V
		Power		380V 50HZ 0.4Kw
		Dimensions		660*400*1200mm
		Weight		200Kg



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference		Reference Picture
Impact Specimen Gap Broaching Machine	CSL-A	Usage: Processing qualified Charpy impact specimen gap.		 Jinan Liangong Testing Technology Co., Ltd.
		Model	CSL-A	
		Gap in the shape of the specimen	V-or U-(2mm)	
		Processing the sample size	10*10(7.5 or 5)*55mm	
		Driving ways	Manual control	
		Broach stroke	350mm	
		Broach Materials	W18Cr4V	
		Power	no electricity	
		Dimensions (mm)	430*400*770mm	
		Weight	100Kg	
Impact Specimen Gap Broaching Machine	CSL-B	Usage: Processing qualified Charpy impact specimen gap.		 Jinan Liangong Testing Technology Co., Ltd.
		Model	CSL-B	
		Gap in the shape of the specimen	V-or U-(2mm)	
		Processing the sample size	10*10(7.5 or 5)*55mm	
		Driving ways	Ball screw drive	
		Broach speed	2.3m/min	
		Broach stroke	350mm	
		Broach Materials	W18Cr4V	
		Power	380V 50HZ 0.5Kw	
		Dimensions	350*570*1250mm	
		Weight	180Kg	



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference	Reference Picture	
Impact Specimen Gap Broaching Machine	CSL-B	Usage: Processing qualified Charpy impact specimen gap.	 Jinan Liangong Testing Technology Co., Ltd.	
		Model		CSL-B
		Gap in the shape of the specimen		V-or U-(2mm)
		Processing the sample size		10*10(7.5 or 5)*55mm
		Driving ways		Ball screw drive
		Broach speed		2.3m/min
		Broach stroke		350mm
		Broach Materials		W18Cr4V
		Power		380V 50HZ 0.5Kw
		Dimensions		570*350*1250mm
Weight	190Kg			



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference	Reference Picture
Impact Specimen Gap Projector	CST-50	Usage: This helps to examine whether the tested impact specimen gap is qualified or not.	 Jinan Liangong Testing Technology Co., Ltd.
		Diameter of the Screen	
		200mm	
		Size of worktable	
		Size of square worktable: 110*125mm Diameter of round worktable: Φ 90mm Diameter of working screen: Φ 70mm	
		Journey of worktable	
		Longitude: ±10mm Latitude: ±10mm Rise and fall: ±12mm	
		Scope of Revolving of the worktable	
		0° ~ 360°	
		Magnification of the instrument	
		50X	
		Magnification of the object lens	
		2.5X	
		Magnification of the objective lens for projection	
		20X	
		Illuminant (Tungsten-halogen lamp)	
		12V 100W	
		Outline size	
		515*224*603mm	
		Weight	
		18Kg	
		Supply power	
		220V 50Hz 150w	



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference	Reference Picture																				
Ferrite Steels Falling Sample Gap Sampling Machine	TLC-200T	Usage: Gap Sampling in drop weight tear test <table><tr><td>Max. pressure load</td><td>2000kN</td></tr><tr><td>Height of compressive space</td><td>360mm</td></tr><tr><td>Angle of opening</td><td>45°±2°</td></tr><tr><td>Depth of opening</td><td>5±0.5mm</td></tr><tr><td>Bottom of opening R</td><td>0.025-0.023+0.013mm</td></tr><tr><td>Load mode</td><td>Hydraulic load</td></tr><tr><td>Power</td><td>380V 50Hz 3KW</td></tr></table>	Max. pressure load	2000kN	Height of compressive space	360mm	Angle of opening	45°±2°	Depth of opening	5±0.5mm	Bottom of opening R	0.025-0.023+0.013mm	Load mode	Hydraulic load	Power	380V 50Hz 3KW	 Jinan Liangong Testing Technology Co., Ltd.						
Max. pressure load	2000kN																						
Height of compressive space	360mm																						
Angle of opening	45°±2°																						
Depth of opening	5±0.5mm																						
Bottom of opening R	0.025-0.023+0.013mm																						
Load mode	Hydraulic load																						
Power	380V 50Hz 3KW																						
Drop Weight Impact Test Low-temperat ure Chamber	LDW-80T	Usage: Keep the sample cooling and insulation in the Drop Weight Impact Test. <table><tr><td>Model</td><td>LDW-80T</td></tr><tr><td>Temperature range</td><td>Room temperature ~ -80 °C</td></tr><tr><td>Temperature control accuracy</td><td>± 0.5 °C</td></tr><tr><td>Cold room volume</td><td>760 * 440 * 220mm</td></tr><tr><td>Dimension</td><td>1510 * 1010 * 1160mm</td></tr><tr><td>Cabinet materials</td><td>Stainless steel</td></tr><tr><td>Sample quantity</td><td>22 (sample size length * width: 305±5*76.2±1.5mm, thickness according to the original steel plate</td></tr><tr><td>Cooling ways</td><td>Compressor</td></tr><tr><td>Cooling medium:</td><td>Ethanol or other ice-free liquid</td></tr><tr><td>Power supply</td><td>380V, 50Hz, 14KW</td></tr></table>	Model	LDW-80T	Temperature range	Room temperature ~ -80 °C	Temperature control accuracy	± 0.5 °C	Cold room volume	760 * 440 * 220mm	Dimension	1510 * 1010 * 1160mm	Cabinet materials	Stainless steel	Sample quantity	22 (sample size length * width: 305±5*76.2±1.5mm, thickness according to the original steel plate	Cooling ways	Compressor	Cooling medium:	Ethanol or other ice-free liquid	Power supply	380V, 50Hz, 14KW	 Jinan Liangong Testing Technology Co., Ltd.
Model	LDW-80T																						
Temperature range	Room temperature ~ -80 °C																						
Temperature control accuracy	± 0.5 °C																						
Cold room volume	760 * 440 * 220mm																						
Dimension	1510 * 1010 * 1160mm																						
Cabinet materials	Stainless steel																						
Sample quantity	22 (sample size length * width: 305±5*76.2±1.5mm, thickness according to the original steel plate																						
Cooling ways	Compressor																						
Cooling medium:	Ethanol or other ice-free liquid																						
Power supply	380V, 50Hz, 14KW																						



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference						Reference Picture	
Drop Weight Tear Testing Machine	JL-3000 JL-6000 JL-8000 JL-30000 JL-40000 JL-50000	Usage: It is used for drop weight tear test for ferrite steel (especially all kinds of pipeline steel).						 Jinan Liangong Testing Technology Co., Ltd.	
		Model	JL-3000	JL-6000	JL-8000	JL-30000	JL-40000		JL-50000
		impact energy range (J)	350~ 3000	1050~ 6000	1320~ 8000	8000~ 30000	10000~ 40000		15000~ 50000
		Main Hammer body quality error	±1%						
		Counterweight quantity	4 Pcs	5 Pcs	4 Pcs	17 Pcs	26 Pcs		35 Pcs
		Total hammer weight	90kg	204kg	320kg	1200kg	1580kg		2300kg
		Max. impact speed	6.3m/s			7.67m/s			7.14m/s
		Hammer lifting height (mm)	2000			1275-3400	1275-3200		1275-2900
		Height measurement resolution	0.1mm						
		Total hammer quality error	±1%						
		Hammer blade and pedestal jaw bearing surface Rockwell hardness	>HRC58						
		Hammer edge center line and support span center deviation	±1.5mm						
		Lift height deviation	±0.3%						
		Hammer edge curve radius	R25±1mm						
		Support jaw curve radius	/	/	R15±0.1mm				R20±0.1mm
		Support span	/	/	254±1.5mm				
		Sample size(mm)	/	/	300*75*(6~32)	(305±5) * (76.2±1.5) * (3~40)			



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference	Reference Picture					
Electronic Universal Testing Machine	CMT-01L CMT-02L CMT-05L CMT-1L CMT-2L CMT-5L	Usage: This machine is applied in analysis and research of statics property testing of tensile, compression, bending, cutting, holding and other items of metal and nonmetal material (including composite material).						
		<table><tr><td>Model</td><td>CMT-01L. 02L. 05L. 1L. 2L. 5L</td><td>CMT-10. 20. 30. 50</td><td>CMT-100</td><td>CMT-200. 300</td></tr></table>		Model	CMT-01L. 02L. 05L. 1L. 2L. 5L	CMT-10. 20. 30. 50	CMT-100	CMT-200. 300
		Model		CMT-01L. 02L. 05L. 1L. 2L. 5L	CMT-10. 20. 30. 50	CMT-100	CMT-200. 300	
		Measurement parameters						
		Max.Test force (kN)		0.1 0.2 0.5 1 2 5	10. 20. 30. 50	100	200. 300	
		Accuracy class		0.5 Class				
		Measuring range of test force		0.2%~100%FS (full scale)				
		Indicating error of test force		within ±0.5% of indicating value				
		Resolution of test force		±1/300000 of maximum test force, grade unchanged and resolution unchanged in whole process				
		Deformation measuring range and indicating error		0.2%~100%FS within ±0.5% of indicating value				
		Resolution of deformation		1/200000 of maximum deformation, up to 1/300000				
		Large deformation measurement range & indicating error & Resolution		10-800mm within ±1% of indicating value 0.008mm				
		Displacement indicating error and Resolution		within ±0.5% of indicating value 0.025μm				



Jinan Liangong Testing Technology Co.,Ltd

Electronic Universal Testing Machine	CMT-01L CMT-02L CMT-05L CMT-1L CMT-2L CMT-5L	Control parameters				
		Tuning range of force control rate	0.005~5%FS/s			
		Control accuracy of force control rate	When rate is less than 0.05%FS/s, within ±2% of setting value			
			When rate is no less than 0.05%FS/s, within ±0.5% of setting value			
		Tuning range of resolution rate	0.2~100%FS			
		Control accuracy of resolution rate	When rate is less than 0.05%FS/s, within ±2% of setting value			
			When rate is no less than 0.05%FS/s, within ±0.5% of setting value			
		Tuning range of replacement rate	0.001~500mm/min			
		Control accuracy of movement rate	When rate is less than 0.5mm/min, within ±1% of setting value			
			When rate is no less than 0.5mm/min, within ±0.2% of setting value			
		Constant force,constant strain(deformation),constant displacement control range	0.2~100%FS			
		Other parameters				
		Effective tensile stroke	800mm	700mm	700mm	600mm
		Effective compression stroke	800mm	700mm	700mm	600mm
		Effective width space	/	400mm	550mm	
		Power	220V,50Hz 0.5kW~0.75kW	220V,50Hz 0.75kW~1kW	380V,50Hz 2kW~5kW	
		Work environment	Room temperature ~ +35°C Relative humidity less than 80%			
		Host size (mm)	650*330*1730	760*460*1900	1050*750*2100	1050*900*2400
		Weight	150kg	350kg	1000kg	1500kg



Jinan Liangong Testing Technology Co., Ltd.



Jinan Liangong Testing Technology Co., Ltd.





Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference			Reference Picture
High and Low Temperature Test Chamber	GWX-300 GDX-30/300 G GDX-60/300 G	Usage: It can complete a variety of metals, non-metallic tensile, compression, bending, shearing and other tests in the high low temperature, and can achieve a variety of special industries (such as plastic, rubber) and other use requirements.			 Jinan Liangong Testing Technology Co., Ltd.  Jinan Liangong Testing Technology Co., Ltd.
		Model	GWX-300	GDX-30/300G	GDX-60/300G
		Temperature control range	Room temperature ~ +300°C	+300°C~-30°C	+300°C~-60°C
		Inside size	240*530*430 (for electronic universal testing machine whose pillar span is 400mm and above)		
		Model of control temperature	PID automatic temperature control		
		Temperature accuracy	0.3%		
		Temperature fluctuation range	±0.5°C		
		Temperature uniformity	±2°C		
		Manner of heating	Magnesium powder heating tube		
		Manner of refrigeration	/	single compressor or liquid nitrogen	double compressors or liquid nitrogen
		View window of hollow heating glass	Yes	Yes	Yes
		Working power	380V 50Hz 1kW	380V 50Hz 2kW	380V 50Hz 3kW



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference	Reference Picture																										
High Temperature Furnace	WGW Series	Usage: It can complete a variety of metals, non-metallic tensile, compression, bending, shearing and other tests in the high low temperature, and can achieve a variety of special industries (such as plastic, rubber) and other use requirements.																											
		<table><tr><th>Item</th><th>Main technical parameters</th></tr><tr><td>Three sections temperature control design</td><td></td></tr><tr><td>Temperature range</td><td>200-1100℃</td></tr><tr><td>Temperature accuracy</td><td>According to HB5195-96B standard</td></tr><tr><td>Soaking Zone Length</td><td>Isothermal section 150mm</td></tr><tr><td>Inner size</td><td>Φ 90*300mm,can be customized on users requirement</td></tr><tr><td>Temperature control mode</td><td>Direct-type (Thermocouple tied with specimen) or indirect-type (Thermocouple from furnace side entry)</td></tr><tr><td>Power</td><td>3kW</td></tr><tr><td rowspan="3">Temperature fluctuation</td><td>≤600℃ ±2 °C</td></tr><tr><td>600~900℃ ±3 °C</td></tr><tr><td>≥900℃ ±4 °C</td></tr><tr><td rowspan="3">Temperature gradient</td><td>≤600℃ 2 °C</td></tr><tr><td>600~900℃ 3 °C</td></tr><tr><td>≥900℃ 4 °C</td></tr><tr><td>Temperature measuring instrument accuracy</td><td>No less than 0.3 class</td></tr></table>		Item	Main technical parameters	Three sections temperature control design		Temperature range	200-1100℃	Temperature accuracy	According to HB5195-96B standard	Soaking Zone Length	Isothermal section 150mm	Inner size	Φ 90*300mm,can be customized on users requirement	Temperature control mode	Direct-type (Thermocouple tied with specimen) or indirect-type (Thermocouple from furnace side entry)	Power	3kW	Temperature fluctuation	≤600℃ ±2 °C	600~900℃ ±3 °C	≥900℃ ±4 °C	Temperature gradient	≤600℃ 2 °C	600~900℃ 3 °C	≥900℃ 4 °C	Temperature measuring instrument accuracy	No less than 0.3 class
		Item		Main technical parameters																									
		Three sections temperature control design																											
		Temperature range		200-1100℃																									
		Temperature accuracy		According to HB5195-96B standard																									
		Soaking Zone Length		Isothermal section 150mm																									
		Inner size		Φ 90*300mm,can be customized on users requirement																									
		Temperature control mode		Direct-type (Thermocouple tied with specimen) or indirect-type (Thermocouple from furnace side entry)																									
		Power		3kW																									
		Temperature fluctuation		≤600℃ ±2 °C																									
				600~900℃ ±3 °C																									
				≥900℃ ±4 °C																									
		Temperature gradient		≤600℃ 2 °C																									
				600~900℃ 3 °C																									
≥900℃ 4 °C																													
Temperature measuring instrument accuracy	No less than 0.3 class																												



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference	Reference Picture																																																												
LCD Digital Display Universal Testing Machine	WES-100B WES-300B WES-600B WES-1000B	Usage: It mainly used for a variety of metal tensile, compression, bending and shear tests, can also be used as plastic, concrete, cement and other non-metallic materials compression test, add simple accessories, it also can complete the tape chain, wire rope, welding electrodes, tile and components variety of performance tests.																																																													
		<table><tr><td>Model</td><td>WES-100B</td><td>WES-300B</td><td>WES-600B</td><td>WES-1000B</td></tr><tr><td>Max.test force (kN)</td><td>100</td><td>300</td><td>600</td><td>1000</td></tr><tr><td>Measuring range of force value</td><td>10-100kN</td><td>4%-100%FS</td><td>50-600kN</td><td>50-1000kN</td></tr><tr><td>Relative error of indicating value</td><td colspan="4">1%</td></tr><tr><td>Test force resolution</td><td colspan="4">0.01kN</td></tr><tr><td>Max.tensile space(including piston stroke) (mm)</td><td>550</td><td>550</td><td>650</td><td>750</td></tr><tr><td>Clamping method</td><td colspan="4">Manual clamping / hydraulic clamping</td></tr><tr><td>Piston stroke</td><td colspan="4">150mm</td></tr><tr><td>Piston maximum speed of movement</td><td colspan="4">50mm/min</td></tr><tr><td>Clamping diameter range of round sample (mm)</td><td colspan="4">Φ6-Φ26mm/Φ13-Φ40mm</td></tr><tr><td>Clamping diameter range of flat sample (mm)</td><td colspan="4">0-15mm</td></tr><tr><td>Upper and lower pressure plate size (mm)</td><td colspan="4">Φ160</td></tr></table>		Model	WES-100B	WES-300B	WES-600B	WES-1000B	Max.test force (kN)	100	300	600	1000	Measuring range of force value	10-100kN	4%-100%FS	50-600kN	50-1000kN	Relative error of indicating value	1%				Test force resolution	0.01kN				Max.tensile space(including piston stroke) (mm)	550	550	650	750	Clamping method	Manual clamping / hydraulic clamping				Piston stroke	150mm				Piston maximum speed of movement	50mm/min				Clamping diameter range of round sample (mm)	Φ6-Φ26mm/Φ13-Φ40mm				Clamping diameter range of flat sample (mm)	0-15mm				Upper and lower pressure plate size (mm)	Φ160			
		Model		WES-100B	WES-300B	WES-600B	WES-1000B																																																								
		Max.test force (kN)		100	300	600	1000																																																								
		Measuring range of force value		10-100kN	4%-100%FS	50-600kN	50-1000kN																																																								
		Relative error of indicating value		1%																																																											
		Test force resolution		0.01kN																																																											
		Max.tensile space(including piston stroke) (mm)		550	550	650	750																																																								
		Clamping method		Manual clamping / hydraulic clamping																																																											
		Piston stroke		150mm																																																											
		Piston maximum speed of movement		50mm/min																																																											
		Clamping diameter range of round sample (mm)		Φ6-Φ26mm/Φ13-Φ40mm																																																											
		Clamping diameter range of flat sample (mm)		0-15mm																																																											
		Upper and lower pressure plate size (mm)		Φ160																																																											



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference				Reference Picture	
Computer Control Electro-hydraulic Servo Universal Testing Machine (E-Model, Grade 0.5)	WAW-4305-E WAW-4605-E WAW-4106-E WAW-4206-E	Usage: This machine mainly used for metal and nonmetal tensile,compression, bend and shear test.				 Jinan Liangong Testing Technology Co.,Ltd	
		Model	WAW-4305-E	WAW-4605-E	WAW-4106-E		WAW-4206-E
		Max.test force (kN)	300	600	1000		2000
		Measuring range of force value	2%-100%FS				
		Relative error of indicating value	1%				
		Deformation measurement device	Extensometer				
		Max.tensile space(including piston stroke) (mm)	800	820	850		950
		Max.compression space(including piston stroke) (mm)	700	720	750		850
		Transmission mode	Chain Drive				
		Safety protection device	Software protection and mechanical limit protection				
		Control function	Special software, stress, strain, three closed-loops with velocity				
		Clamping diameter range of round sample (mm)	Φ10~Φ32	Φ10~Φ40	Φ15~Φ55		Φ15~Φ70
		Clamping diameter range of flat sample (mm)	2~25	2~30	2~40		0~40
		Upper and lower pressure plate size (mm)	Φ188		Φ208		
		Bending branch roll width (mm)	140				
		Total power (kW)	2.5	2.5	2.5		3.0
		Dimension (mm) Host worktable	848*744*2247	898*764*2400	1064*866*2705		1230*960*3125
			920*720*1820				



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference				Reference Picture	
Computer Screen Display Hydraulic Universal Testing Machine	WEW-300B WEW-600B WEW-1000B WEW-2000B	Usage: This machine mainly used for metal and nonmetal tensile,compression, bend and shear test.				 Jinan Liangong Testing Technology Co., Ltd.	
		Model	WEW-300B	WEW-600B	WEW-1000B		WEW-2000B
		Max.test force (kN)	300	600	1000		2000
		Measuring range of force value	2%-100%FS				
		Relative error of indicating value	1%				
		Deformation measurement device	Extensometer				
		Max.tensile space(including piston stroke) (mm)	600	600	600		600
		Max.compression space(including piston stroke) (mm)	500	500	500		500
		Transmission mode	Chain Drive				
		Safety protection device	software protection and mechanical limit protection				
		Control function	special software				
		Clamping diameter range of round sample (mm)	Φ10~Φ32	Φ13~Φ40	Φ13~Φ60		Φ20~Φ70
		Clamping diameter range of flat sample (mm)	0~15	0~15	0~20		0~40
		Upper and lower pressure plate size (mm)	Φ188		Φ208		
		Bending branch roll width (mm)	140				
		Total power (kW)	2.0	2.1	2.5		3.0
		Dimension (mm) Host worktable	800*600*1980	820*620*2150	940*720*2330		1100*760*3000
		1120*600*850					



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference				Reference Picture	
Computer Control Electro-hydraulic Servo Universal Testing Machine (B-Model, Grade 1)	WAW-300B WAW-600B WAW-1000B WAW-2000B	Usage: This machine mainly used for metal and nonmetal tensile,compression, bend and shear test.				 Jinan Liangong Testing Technology Co., Ltd.	
		Model	WAW-300B	WAW-600B	WAW-1000B		WAW-2000B
		Max.test force (kN)	300	600	1000		2000
		Measuring range of force value	2%-100%FS				
		Relative error of indicating value	1%				
		Deformation measurement device	Extensometer				
		Max.tensile space(including piston stroke) (mm)	600	600	600		600
		Max.compression space(including piston stroke) (mm)	500	500	500		500
		Transmission mode	Chain Drive				
		Safety protection device	software protection and mechanical limit protection				
		Control function	special software, stress, strain, three closed-loops with velocity				
		Clamping diameter range of round sample (mm)	Φ10~Φ32	Φ13~Φ40	Φ13~Φ60		Φ20~Φ70
		Clamping diameter range of flat sample (mm)	0~15	0~15	0~20		0~40
		Upper and lower pressure plate size (mm0	Φ188		Φ208		
		Bending branch roll width (mm)	140				
		Total power (kW)	2.0	2.1	2.5		3.0
		Dimension (mm) Host worktable	800*600*1980	810*700*2150	940*720*2330		1100*760*3000
							1120*600*850



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference				Reference Picture
Tensile Specimens Gauge Meter (Striking Machine)	DB-30 DX-300 DX-400	Usage: Striking point for metal materials tensile specimens				 Jinan Liangong Testing Technology Co., Ltd.  Jinan Liangong Testing Technology Co., Ltd.
		Item/Model	DB-30 Electric single point	DX-300 Manual multi-point	DX-400 Manual multi-point	
		Control manner	Electric	Manual	Manual	
		Point space	5mm/100 adjustable	10mm		
		Striking point each time	single point	30	40	
		Longest gauge	300mm	300mm	400mm	
		Dimension	460*315*450mm	490*200*300mm	490*200*400mm	
		Weight	25kg	22kg	23kg	
		Characteristic	Electric control, high precision ball screw positioning precisely, high efficiency, easy operation, product precision 0.05mm	Continuous multi-point, easy and quick		



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference				Reference Picture
High Temperature Creep Testing Machine	CMT-6304-C CMT-6504-C CMT-6804-C CMT-6105-C	Usage: It mainly used for room temperature (high) endurance test of metal, nonmetal, composite materials and components.				 Jinan Liangong Testing Technology Co., Ltd.
		Model	CMT-6304-C	CMT-6504-C	CMT-6804-C	CMT-6105-C
		Load range (kN)	0.3~30	0.5~50	0.8~80	1~100
		Test force measurement accuracy	within $\pm 1\%$			
		upper and lower eccentricity ratio	$\leq 10\%$			
		Deformation displacement range	2mm			
		Min.weight force value	1N			
		Deformation measurement Error	0.1%FS			
		Deformation measurement resolution	0.001MM			
		Heating Furnace power	3kw			
		Soaking zone length	150mm			
		Working temperature	200-1100°C			
		Lower link stroke	200mm			
		Power	1-Phase 0.75kw	3-Phase 1kw	3-Phase 1.5kw	3-Phase 2kw



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference	Reference Picture																																				
Computer Control Cupping Testing Machine	GBW-60B	Usage: It is the precise device which used to test plastic deformation of metal thin sheet and banded material.	 Jinan Liangong Testing Technology Co., Ltd.																																				
		<table><tr><td>Model</td><td>GBW-60B</td></tr><tr><td>Maximum test force</td><td>60kN</td></tr><tr><td>Range of test force</td><td>0.2kN~60kN</td></tr><tr><td>Test accuracy</td><td>1%</td></tr><tr><td>Speed of test</td><td>2~100mm/min (under control of arbitrary rate and constant speed)</td></tr><tr><td>Cupping mould</td><td>Φ20±0.05mm</td></tr><tr><td>Standard pad mold aperture</td><td>Φ33±0.1mm</td></tr><tr><td>Standard fixed mold aperture</td><td>Φ27±0.05mm</td></tr><tr><td>Max.width of sheet</td><td>100mm</td></tr><tr><td>Thickness of Gripping specimen</td><td>0.05~2mm</td></tr><tr><td>Journey of punch</td><td>60mm</td></tr><tr><td>Journey of cramping piston</td><td>40mm</td></tr><tr><td>Max.clamping load</td><td>25kN</td></tr><tr><td>Max.punch load</td><td>60kN</td></tr><tr><td>Resolution of cupping value</td><td>0.01mm</td></tr><tr><td>Hydraulic oil</td><td>N46</td></tr><tr><td>Dimension</td><td>700*360*1700mm</td></tr><tr><td>Power</td><td>380V 50Hz 3kW</td></tr></table>		Model	GBW-60B	Maximum test force	60kN	Range of test force	0.2kN~60kN	Test accuracy	1%	Speed of test	2~100mm/min (under control of arbitrary rate and constant speed)	Cupping mould	Φ20±0.05mm	Standard pad mold aperture	Φ33±0.1mm	Standard fixed mold aperture	Φ27±0.05mm	Max.width of sheet	100mm	Thickness of Gripping specimen	0.05~2mm	Journey of punch	60mm	Journey of cramping piston	40mm	Max.clamping load	25kN	Max.punch load	60kN	Resolution of cupping value	0.01mm	Hydraulic oil	N46	Dimension	700*360*1700mm	Power	380V 50Hz 3kW
		Model		GBW-60B																																			
		Maximum test force		60kN																																			
		Range of test force		0.2kN~60kN																																			
		Test accuracy		1%																																			
		Speed of test		2~100mm/min (under control of arbitrary rate and constant speed)																																			
		Cupping mould		Φ20±0.05mm																																			
		Standard pad mold aperture		Φ33±0.1mm																																			
		Standard fixed mold aperture		Φ27±0.05mm																																			
		Max.width of sheet		100mm																																			
		Thickness of Gripping specimen		0.05~2mm																																			
		Journey of punch		60mm																																			
		Journey of cramping piston		40mm																																			
		Max.clamping load		25kN																																			
		Max.punch load		60kN																																			
		Resolution of cupping value		0.01mm																																			
		Hydraulic oil		N46																																			
		Dimension		700*360*1700mm																																			
		Power		380V 50Hz 3kW																																			



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference	Reference Picture																														
Computer Control Deep Drawing Cupping Testing Machine	GBC-60W	Usage: It is the precise device which used to test plastic deformation of metal thin sheet and banded material.	 Jinan Liangong Testing Technology Co., Ltd.																														
		<table><tr><td>Model</td><td>GBC-60W</td></tr><tr><td>Maximum test force</td><td>60kN</td></tr><tr><td>Range of test force</td><td>0.2kN~60kN</td></tr><tr><td>Test accuracy</td><td>1%</td></tr><tr><td>Speed of test</td><td>2~100mm/min (under control of arbitrary rate and constant speed)</td></tr><tr><td>Journey of cramping piston</td><td>40mm</td></tr><tr><td>Resolution of cupping value</td><td>0.01mm</td></tr><tr><td>Thickness of Gripping specimen</td><td>0.05~3mm</td></tr></table>		Model	GBC-60W	Maximum test force	60kN	Range of test force	0.2kN~60kN	Test accuracy	1%	Speed of test	2~100mm/min (under control of arbitrary rate and constant speed)	Journey of cramping piston	40mm	Resolution of cupping value	0.01mm	Thickness of Gripping specimen	0.05~3mm														
		Model		GBC-60W																													
		Maximum test force		60kN																													
		Range of test force		0.2kN~60kN																													
		Test accuracy		1%																													
		Speed of test		2~100mm/min (under control of arbitrary rate and constant speed)																													
		Journey of cramping piston		40mm																													
		Resolution of cupping value		0.01mm																													
Thickness of Gripping specimen	0.05~3mm																																
Steel Bar (Pipe) Bending Testing Machine	GW-40B GW-50B	Usage: It is special equipment which process cold bend tests and plane rebend tests for steel bar(pipe).	 Jinan Liangong Testing Technology Co., Ltd.																														
		<table><tr><td>Model</td><td>GW-40B</td><td>GW-50B</td></tr><tr><td>Range of diameter of steel bars</td><td>φ 6-φ40mm</td><td>φ 6-φ50mm</td></tr><tr><td>Angle of bend</td><td>0°-180° with the arbitrary set</td><td>0°-180° with the arbitrary set</td></tr><tr><td>Angle of rebend</td><td>0°-180° with the arbitrary set</td><td>0°-180° with the arbitrary set</td></tr><tr><td>Rotational speed of worktable</td><td colspan="2">≤1.4r/min</td></tr><tr><td>Distance of roller center</td><td>245mm</td><td>366mm</td></tr><tr><td>Diameter of worktable</td><td>φ 560mm</td><td>φ 860mm</td></tr><tr><td>Outline size of the host</td><td>1000*750*1200mm</td><td>1320*1185*1380mm</td></tr><tr><td>Weight</td><td>750kg</td><td>2000kg</td></tr><tr><td>Power</td><td>380V 50Hz 1.5kw</td><td>380V 50Hz 3kw</td></tr></table>		Model	GW-40B	GW-50B	Range of diameter of steel bars	φ 6-φ40mm	φ 6-φ50mm	Angle of bend	0°-180° with the arbitrary set	0°-180° with the arbitrary set	Angle of rebend	0°-180° with the arbitrary set	0°-180° with the arbitrary set	Rotational speed of worktable	≤1.4r/min		Distance of roller center	245mm	366mm	Diameter of worktable	φ 560mm	φ 860mm	Outline size of the host	1000*750*1200mm	1320*1185*1380mm	Weight	750kg	2000kg	Power	380V 50Hz 1.5kw	380V 50Hz 3kw
		Model		GW-40B	GW-50B																												
		Range of diameter of steel bars		φ 6-φ40mm	φ 6-φ50mm																												
		Angle of bend		0°-180° with the arbitrary set	0°-180° with the arbitrary set																												
		Angle of rebend		0°-180° with the arbitrary set	0°-180° with the arbitrary set																												
		Rotational speed of worktable		≤1.4r/min																													
		Distance of roller center		245mm	366mm																												
		Diameter of worktable		φ 560mm	φ 860mm																												
		Outline size of the host		1000*750*1200mm	1320*1185*1380mm																												
		Weight		750kg	2000kg																												
		Power		380V 50Hz 1.5kw	380V 50Hz 3kw																												



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference	Reference Picture														
YGBW Series Steel Bar Bending Testing Machine	YGBW-50A	Usage: Used for bending tests of metal bars, pipes, plates, and construction rebars to determine their bending plasticity.	 Jinan Liangong Testing Technology Co., Ltd.														
		<table><tr><td>Model</td><td>YGBW-50A</td></tr><tr><td>Max. Test Force</td><td>500kN</td></tr><tr><td>Working Stroke</td><td>400mm</td></tr><tr><td>Max. Pressure</td><td>31.5MPa</td></tr><tr><td>Bending Core Diameter</td><td>Φ6-200 (According to customer equipped)</td></tr><tr><td>Round (Flat) Sample Diameter</td><td>Φ6-50 (6-50)</td></tr><tr><td>Power</td><td>3.0kW</td></tr></table>		Model	YGBW-50A	Max. Test Force	500kN	Working Stroke	400mm	Max. Pressure	31.5MPa	Bending Core Diameter	Φ6-200 (According to customer equipped)	Round (Flat) Sample Diameter	Φ6-50 (6-50)	Power	3.0kW
		Model		YGBW-50A													
		Max. Test Force		500kN													
		Working Stroke		400mm													
		Max. Pressure		31.5MPa													
		Bending Core Diameter		Φ6-200 (According to customer equipped)													
		Round (Flat) Sample Diameter		Φ6-50 (6-50)													
Power	3.0kW																



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference	Reference Picture
Double Station Bending Testing Machine	GW-40Y	Usage: Can bend steel rebar under HRB400, within Φ50mm.	 Jinan Liangong Testing Technology Co., Ltd.



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference	Reference Picture
Power-Driven Metal Materials Repeated Bending Testing Machine	JWJ-10	Usage: This test machine is mainly used for repeated bending test of metal wire / sheet to test the performance of the metal wire/sheet in repeated bending to withstand the plastic deformation and displayed defects;	 Jinan Liangong Testing Technology Co.,Ltd



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference	Reference Picture
Torsion Testing Machine	NDW-200/500/1000/3000/5000	Usage: This machine is used to do the torsion performance test metal materials, non-metallic materials, composite materials and shaft parts of components.	



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference	Reference Picture																		
Pipe Ring Stiffness Testing Machine	CMT-H	Usage: It is usually for the pipe ring stiffness test.	 Jinan Liangong Testing Technology Co., Ltd.																		
		<table><tr><td>Model</td><td>CMT-H</td></tr><tr><td>Accuracy class</td><td>0.5 class</td></tr><tr><td>Test space</td><td>According to customer requirement</td></tr><tr><td>Displacement resolution</td><td>0.4μm</td></tr><tr><td>Effective test width</td><td>According to customer requirement</td></tr><tr><td>Test speed adjusting range</td><td>0.001~500mm/min</td></tr><tr><td>Pipe inner diameter measurement range</td><td>50-200/200-2500mm</td></tr><tr><td>Pipe inner diameter measurement accuracy</td><td>±1%</td></tr><tr><td>Pipe inner diameter measurement resolution</td><td>0.01mm</td></tr></table>		Model	CMT-H	Accuracy class	0.5 class	Test space	According to customer requirement	Displacement resolution	0.4μm	Effective test width	According to customer requirement	Test speed adjusting range	0.001~500mm/min	Pipe inner diameter measurement range	50-200/200-2500mm	Pipe inner diameter measurement accuracy	±1%	Pipe inner diameter measurement resolution	0.01mm
		Model		CMT-H																	
		Accuracy class		0.5 class																	
		Test space		According to customer requirement																	
		Displacement resolution		0.4μm																	
		Effective test width		According to customer requirement																	
		Test speed adjusting range		0.001~500mm/min																	
		Pipe inner diameter measurement range		50-200/200-2500mm																	
		Pipe inner diameter measurement accuracy		±1%																	
Pipe inner diameter measurement resolution	0.01mm																				



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference	Reference Picture																		
Man-made Panel Universal Testing Machine	CMT-10B	Usage: Applied to various wood-based panel manufacturers and wood material inspection departments, able to complete the testing of various mechanical properties of plywood, particle board, medium density fiberboard, etc.	 																		
		<table><tr><td>Type</td><td>CMT-10B</td></tr><tr><td>Max. test force</td><td>10KN</td></tr><tr><td>Class of testing machine</td><td>0.5</td></tr><tr><td>Measuring range</td><td>2%~100% Fs</td></tr><tr><td>Test force accuracy</td><td>±1%</td></tr><tr><td>Displacement accuracy</td><td>Micrometer gauge</td></tr><tr><td>Test speed</td><td>0.001~500mm/min</td></tr><tr><td>Effective testing width</td><td>400mm</td></tr><tr><td>Clamp configuration</td><td>1.One set of additional tools of static bending strength and elastic module 2.One set of screw holding capability clamp 3.One set of internal combinative strength clamp 4.One set of surface bonding strength and surface agglutination strength clamps 5.One set of bonding strength testing and tensile strength clamps.</td></tr></table>		Type	CMT-10B	Max. test force	10KN	Class of testing machine	0.5	Measuring range	2%~100% Fs	Test force accuracy	±1%	Displacement accuracy	Micrometer gauge	Test speed	0.001~500mm/min	Effective testing width	400mm	Clamp configuration	1.One set of additional tools of static bending strength and elastic module 2.One set of screw holding capability clamp 3.One set of internal combinative strength clamp 4.One set of surface bonding strength and surface agglutination strength clamps 5.One set of bonding strength testing and tensile strength clamps.
		Type		CMT-10B																	
		Max. test force		10KN																	
		Class of testing machine		0.5																	
		Measuring range		2%~100% Fs																	
		Test force accuracy		±1%																	
		Displacement accuracy		Micrometer gauge																	
		Test speed		0.001~500mm/min																	
		Effective testing width		400mm																	
Clamp configuration	1.One set of additional tools of static bending strength and elastic module 2.One set of screw holding capability clamp 3.One set of internal combinative strength clamp 4.One set of surface bonding strength and surface agglutination strength clamps 5.One set of bonding strength testing and tensile strength clamps.																				



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference	Reference Picture
Metal Wire Torsion and Winding Testing Machine	ER-10	Usage: It main test the ability of wire in one-way, two-way torsion or winding to withstand plastic deformation and display wire surface and internal defects.	
		Model	
		Maximum distance between the two chuck	
		Rotation speed	
		Jaws hardness	
		Test machine working noise	
		Wire diameter	
		Winding speed	
		Effective working length of mandrel	
		Power supply	
		Winding direction	
		Environment and working conditions:	



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference	Reference Picture
Automatic Compression Testing Machine	YAW-300B	Usage: Used for the compressive strength test of cement, concrete, rock, and also for the testing of mechanical properties of other materials	
		Model	
		Max.Test Force	
		Test Measurement Range	
		Test Force and Relative Error Value	
		Loading Rate	
		Loading Rate Error	
		Compression Plate Size	
		Max. Pinson Stroke	
		Pinson Diameter	
		Upper and Lower Compression Plate Space	
		Max.Oil Pressure	
		Pump Rated Flow	
		Motor Power	
		Overall Dimension	
		Weight	



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference			Reference Picture
	YAW-2000 YAW-3000	Model	YAW-2000	YAW-3000	
		Max.test force	2000kn	3000kn	
		Test force measurement range	4%-100%FS		
		Relative error of test force value	±1%		
		Test force Resolution	0.01kn		
		Hydraulic Pump Pressure Pressure Rated	25MPa		
		Plate adjustment way	Electric lift		
		Max. piston stroke	100mm		
		Pressure plate size	350*350mm	450*450mm	
		Max. distance between up and below pressure plate	400mm	450mm	
		Piston diameter	φ320mm	φ400mm	
		Lift motor power	3-phase 0.75kw		
		Weight	About 1150kg	About 2000kg	
Automatic Compression - Flexural Testing Machine	YAW-300C	Usage: Achieve electronic measurement, automatic compression strength test			
		Item	Compression	Flexural	
		Max.Test Force	300kN	10kN	
		Test Measurement Range	20-300kN	1-10kN	
		Test Force and Relative Error Value	≤±1%	≤±1%	
		Upper and Lower Compression Plate Space	250mm	190mm	
		Max. Piston Stroke	80mm	60mm	
		Tow column space	220mm	180mm	
		Compression Plate size	φ160mm	φ160mm	
		Motor Power	0.75KW		
		Overall Dimension mm	1420*475*1350mm		
		Weight	450kg		



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference	Reference Picture																																	
Digital Display Compression Testing Machine	YES-2000 YES-3000	Usage: This machine mainly used for the compressive strength test to brick, stone, cement, concrete materials, which can also be used to other materials compressive performance tests.	 Jinan Liangong Testing Technology Co., Ltd.																																	
		<table><tr><td>Model</td><td>YES-2000</td><td>YES-3000</td></tr><tr><td>Max. testing force</td><td>2000kN</td><td>3000kN</td></tr><tr><td>Measurement range</td><td colspan="2">4%-100%FS</td></tr><tr><td>Relative error of test force value:</td><td colspan="2">≤±1%</td></tr><tr><td>Leading screw adjusting mode</td><td colspan="2">Electronic or Manual</td></tr><tr><td>Motor power</td><td>0.75 kW</td><td>1.1kW</td></tr><tr><td>Pressure plate size</td><td>370*370mm</td><td>500*500mm</td></tr><tr><td>Max. distance between up and below pressure plate</td><td>330mm</td><td>500mm</td></tr><tr><td>Max. piston stroke</td><td>40mm</td><td>100mm</td></tr><tr><td>Piston diameter</td><td colspan="2">φ250mm</td></tr><tr><td>System work pressure</td><td colspan="2">40Mpa</td></tr></table>		Model	YES-2000	YES-3000	Max. testing force	2000kN	3000kN	Measurement range	4%-100%FS		Relative error of test force value:	≤±1%		Leading screw adjusting mode	Electronic or Manual		Motor power	0.75 kW	1.1kW	Pressure plate size	370*370mm	500*500mm	Max. distance between up and below pressure plate	330mm	500mm	Max. piston stroke	40mm	100mm	Piston diameter	φ250mm		System work pressure	40Mpa	
		Model		YES-2000	YES-3000																															
		Max. testing force		2000kN	3000kN																															
		Measurement range		4%-100%FS																																
		Relative error of test force value:		≤±1%																																
		Leading screw adjusting mode		Electronic or Manual																																
		Motor power		0.75 kW	1.1kW																															
		Pressure plate size		370*370mm	500*500mm																															
		Max. distance between up and below pressure plate		330mm	500mm																															
		Max. piston stroke		40mm	100mm																															
		Piston diameter		φ250mm																																
		System work pressure		40Mpa																																



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference	Reference Picture
Well Cover Compression Testing Machine	JYAW-600D JYAW-1000 D JYAW-1500 D	Usage: Use to test the well cover bearing capacity,	



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference	Reference Picture																																				
Carton Compression Testing Machine	CMT-ZY	Usage: For various types of corrugated box compressive strength test and stacking strength test. Parameters can customize according customer requirement.	 Jinan Liangong Testing Technology Co., Ltd.																																				
Quenching Testing Bench	DZ-2 DZ-4 DZ-6	Usage: It is used for end-quenching test for laboratory materials. <table><tr><td>Model</td><td>DZ-2</td><td>DZ-4</td><td>DZ-6</td></tr><tr><td>Station number</td><td>2</td><td>4</td><td>6</td></tr><tr><td>The diameter of tap nozzle</td><td colspan="3">$\phi 12.5\text{mm}$</td></tr><tr><td>The height of water column</td><td colspan="3">$65 \pm 5\text{mm}$ (adjustable)</td></tr><tr><td>The distance between the tap and the end of sample</td><td colspan="3">12.5mm (adjustable)</td></tr><tr><td>Sample size</td><td colspan="3">$\phi 25 * 100$</td></tr><tr><td>Means of water supplied</td><td colspan="3">water pumps, auto-cycle</td></tr><tr><td>Operating</td><td colspan="3">Every station can be operated independently and separately</td></tr><tr><td>Overall dimension (mm)</td><td>600*610*1500</td><td>1000*550*1500</td><td>1200*610*1500</td></tr></table>	Model	DZ-2	DZ-4	DZ-6	Station number	2	4	6	The diameter of tap nozzle	$\phi 12.5\text{mm}$			The height of water column	$65 \pm 5\text{mm}$ (adjustable)			The distance between the tap and the end of sample	12.5mm (adjustable)			Sample size	$\phi 25 * 100$			Means of water supplied	water pumps, auto-cycle			Operating	Every station can be operated independently and separately			Overall dimension (mm)	600*610*1500	1000*550*1500	1200*610*1500	 Jinan Liangong Testing Technology Co., Ltd.
Model	DZ-2	DZ-4	DZ-6																																				
Station number	2	4	6																																				
The diameter of tap nozzle	$\phi 12.5\text{mm}$																																						
The height of water column	$65 \pm 5\text{mm}$ (adjustable)																																						
The distance between the tap and the end of sample	12.5mm (adjustable)																																						
Sample size	$\phi 25 * 100$																																						
Means of water supplied	water pumps, auto-cycle																																						
Operating	Every station can be operated independently and separately																																						
Overall dimension (mm)	600*610*1500	1000*550*1500	1200*610*1500																																				



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference	Reference Picture																														
Computer Control Universal Friction and Wear Testing Machine	MMW-1A	Usage: To achieve the friction simulation test between different friction pairs, to evaluate the friction and wear properties of lubricants, metals, coatings, coatings, rubber, ceramics and other materials.	 Jinan Liangong Testing Technology Co., Ltd.																														
		<table><tr><td>Project name</td><td>Technology index</td></tr><tr><td>Range of test force</td><td>10-1000N</td></tr><tr><td>Test force relative error</td><td>±1%</td></tr><tr><td>Test force long maintained relative error (30min)</td><td>±1%FS</td></tr><tr><td>Friction moment measurement range</td><td>0-2500N.mm</td></tr><tr><td>Friction moment relative error</td><td>±1%</td></tr><tr><td>Friction arm length</td><td>50mm</td></tr><tr><td>Spindle motor type</td><td>Servo motor</td></tr><tr><td>Motor output max.torque</td><td>5N.m</td></tr><tr><td>Spindle speed</td><td>1-2000r/min, Stepless speed regulation</td></tr><tr><td>Spindle speed error</td><td>Below 100r/min:±1r/min Above 100r/min:±5r/min</td></tr><tr><td>Test medium</td><td>Air,oil, water, slurry, abrasive material</td></tr><tr><td>Heater heating range</td><td>Room temperature-260℃</td></tr><tr><td>Temperature control accuracy</td><td>±2℃</td></tr><tr><td>Shutdown control</td><td>Manual/Automatic(Time.Revolutions. Friction moment and so on)</td></tr></table>		Project name	Technology index	Range of test force	10-1000N	Test force relative error	±1%	Test force long maintained relative error (30min)	±1%FS	Friction moment measurement range	0-2500N.mm	Friction moment relative error	±1%	Friction arm length	50mm	Spindle motor type	Servo motor	Motor output max.torque	5N.m	Spindle speed	1-2000r/min, Stepless speed regulation	Spindle speed error	Below 100r/min:±1r/min Above 100r/min:±5r/min	Test medium	Air,oil, water, slurry, abrasive material	Heater heating range	Room temperature-260℃	Temperature control accuracy	±2℃	Shutdown control	Manual/Automatic(Time.Revolutions. Friction moment and so on)
		Project name		Technology index																													
		Range of test force		10-1000N																													
		Test force relative error		±1%																													
		Test force long maintained relative error (30min)		±1%FS																													
		Friction moment measurement range		0-2500N.mm																													
		Friction moment relative error		±1%																													
		Friction arm length		50mm																													
		Spindle motor type		Servo motor																													
		Motor output max.torque		5N.m																													
		Spindle speed		1-2000r/min, Stepless speed regulation																													
		Spindle speed error		Below 100r/min:±1r/min Above 100r/min:±5r/min																													
		Test medium		Air,oil, water, slurry, abrasive material																													
		Heater heating range		Room temperature-260℃																													
		Temperature control accuracy		±2℃																													
		Shutdown control		Manual/Automatic(Time.Revolutions. Friction moment and so on)																													



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference		Reference Picture
Brinell Hardness Tester	HBS-3000B	Model	HBS-3000B	
		Measuring range	8-650HBW	
		Test force	187.5kgf (1839N), 250kgf (2452N), 500kgf (4903N), 750kgf (7355N), 1000kgf (8907N), 1500kgf (14710N), 3000kgf (29420N)	
		Max. height of test piece	230mm	
		Distance between indenter center and machine wall	135mm	
		Power supply	220V AC	
		Dimensions	700* 270* 840mm	
		Weight	Approx. 150kg	
Rockwell Hardness Tester	HRS-150	Model	HRS-150	
		Measuring range	20-90HRA, 20-100HRB, 20-70HRC	
		Test force	588.4, 980.7, 1471N (60,100,150kgf)	
		Hardness reading mode	Digital Display	
		Max. height of test piece	210mm	
		Distance between indenter center and machine wall	165mm	
		Hardness resolution	0.1HR	
		Power supply	220V AC	
		Dimensions	510*290*730mm	
		Weight	Approx. 85kg	



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference		Reference Picture
Vickers Hardness Tester	HVS-1000	Model	HVS-1000	
		Measuring range	5-3000HV	
		Test force	0.09807, 0.2452, 0.4903, 0.9807, 1.961, 2.942, 4.904, 9.807N (10, 25, 50, 100, 200, 300, 500, 1000 kgf)	
		Hardness scale	HV0.01, HV0.025, HV0.05, HV0.1, HV0.2, HV0.3, HV0.5, HV1	
		Measuring system magnification	400X(testing) , 100X(observation)	
		Measuring system resolution	0.01um	
		Measuring system measuring range	200um	
		Accuracy	GB/T 4340.2-1999	
		Max. height of test piece	90mm	
		Distance between indenter center and machine wall	120mm	
		Power supply	220V AC	
		Dimensions	480* 320 * 560mm	
		Weight	Approx. 40kg	
Metallographic Specimen Cutting Machine	Q-2	Model	Q-2	
		The largest cutting area	Φ35mm	
		Wheel-chip specifications	250*2*32mm	
		Rotating speed	2800r/min	
		Motor	2.2 Kw	
		Power	380V, 50Hz	
		Size	650*500*400mm	



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference		Reference Picture
Metallographic Specimen Polishing Machine	P-2G	Model	P-2G	 Jinan Liangong Testing Technology Co., Ltd
		Disk diameter	203 mm	
		Rotate(rpm)	1400r/min,900r/min (Can customize)	
		Power	220V	
		Size	810*470*980mm	
		Weight	About 75kg	
Metallographic Specimen Grinding and Polishing Machine	MP-2	Model	MP-2	
		Disk diameter	Grinding disk:230mm Polishing disk:200 mm	
		Rotate(rpm)	450r/min, 600r/min (or customize)	
		Motor	YSS7124,550W	
		Power	370W 220V 50Hz	
		Size	690*720*310mm	
		Weight	About 55kg	
Metallographic Specimen Mounting Press	XQ-2B	Model	XQ-2B	 Jinan Liangong Testing Technology Co., Ltd
		Diameter of specimen	Ø30*15mm (Option: Ø22*15mm, Ø45*18mm)	
		Heater	650W, 220V	
		Temperature adjusting range	100-180 °C	
		Power	220V 50Hz. The voltage fluctuation should be no more than 15%.	
		Size	340*270*400mm	
		Weight	About 33Kg	

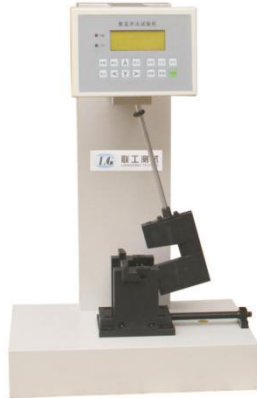


Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference		Reference Picture
Metallographic Microscope	4XC-W	Name	Specification	
		Host	4XC-W Inverted Metallographic Microscope	
		Eyepiece Sleeve: inverted trinocular microscope	Hinged binoculars eyepiece tube Tilting angle: 30° Three eyepiece diopter adjustable	
		Eyepiece	(Wide view eyepiece):10X/Φ18mm	
		Objective lens converter	Four-hole lens converter	
		Objective Lens	10X/0.25 Effective working distance: 8.9mm 20X/0.4 Effective working distance: 3.75mm 40X/0.65 Effective working distance: 2.69mm 100X/0.90 Effective working distance: 0.44mm	
		Focusing mechanism	With limit and elastic adjusting device of the coaxial coarse micro focusing system, lifting:30mm micro scale:0.002mm	
		Objective table	Specification:200x152mm Platform tablet 1 piece Small platform: small and big hole per one	
		Mechanical moving object stage	Moving Range:15x15mm	
		Illuminating System:	Halogen lamp 20W/6V, Center and brightness are adjustable	
		Color Filter	Green, blue, yellow	
		Metallographic analysis software	Objective micrometer precision (0.01 mm) 0.5 X adaptation 3 million pixels Metallographic automatic analysis system	



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference	Reference Picture																																				
LCD Charpy & Izod Impact Testing Machine	XJ-50D	Usage: It is used to measure impact toughness of plastic,enhance nylon, glass fiber reinforced plastic, ceramic, and cast stone, plastic appliances, insulating materials and nonmetal materials.																																					
		<table><tr><td>Impact way</td><td>Charpy</td><td>Izod</td></tr><tr><td>Impact speed</td><td>3.8m/s</td><td>3.5m/s</td></tr><tr><td>Pendulum energy</td><td>7.5J, 15J, 25J, 50J</td><td>5.5J, 11J, 22J</td></tr><tr><td>The distance between pendulum center and sample center</td><td>380mm</td><td>322mm</td></tr><tr><td>The distance between impact blade and upper plan of jaw</td><td>/</td><td>22mm</td></tr><tr><td>Pendulum Release angle</td><td>160°</td><td>160°</td></tr><tr><td>Pendulum torque</td><td>Pd7.5=3.8662N.m Pd15=7.7324N.m Pd25=12.8888N.m Pd50=25.777N.m</td><td>Pd5.5=2.8355N.m Pd11=5.6711N.m Pd22=11.3419N.m</td></tr><tr><td>Jaw length</td><td>85mm</td><td>/</td></tr><tr><td>Clamp mouth supporting spacing</td><td>40mm, 60mm, 70mm, 95mm</td><td>/</td></tr><tr><td>Supporting blade fillet radius</td><td>R=1mm</td><td>/</td></tr><tr><td>Impact blade Angle</td><td>30°</td><td>11°</td></tr><tr><td>Impact blade fillet radius</td><td>R=2mm</td><td>R=0.8mm</td></tr></table>		Impact way	Charpy	Izod	Impact speed	3.8m/s	3.5m/s	Pendulum energy	7.5J, 15J, 25J, 50J	5.5J, 11J, 22J	The distance between pendulum center and sample center	380mm	322mm	The distance between impact blade and upper plan of jaw	/	22mm	Pendulum Release angle	160°	160°	Pendulum torque	Pd7.5=3.8662N.m Pd15=7.7324N.m Pd25=12.8888N.m Pd50=25.777N.m	Pd5.5=2.8355N.m Pd11=5.6711N.m Pd22=11.3419N.m	Jaw length	85mm	/	Clamp mouth supporting spacing	40mm, 60mm, 70mm, 95mm	/	Supporting blade fillet radius	R=1mm	/	Impact blade Angle	30°	11°	Impact blade fillet radius	R=2mm	R=0.8mm
		Impact way		Charpy	Izod																																		
		Impact speed		3.8m/s	3.5m/s																																		
		Pendulum energy		7.5J, 15J, 25J, 50J	5.5J, 11J, 22J																																		
		The distance between pendulum center and sample center		380mm	322mm																																		
		The distance between impact blade and upper plan of jaw		/	22mm																																		
		Pendulum Release angle		160°	160°																																		
		Pendulum torque		Pd7.5=3.8662N.m Pd15=7.7324N.m Pd25=12.8888N.m Pd50=25.777N.m	Pd5.5=2.8355N.m Pd11=5.6711N.m Pd22=11.3419N.m																																		
		Jaw length		85mm	/																																		
		Clamp mouth supporting spacing		40mm, 60mm, 70mm, 95mm	/																																		
		Supporting blade fillet radius		R=1mm	/																																		
		Impact blade Angle		30°	11°																																		
		Impact blade fillet radius		R=2mm	R=0.8mm																																		



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference		Reference Picture
Falling Hammer Impact Testing Machine	XJL-300B	Usage: This machine is used for for plastic, glass, ceramics and other non-metallic materials samples or pipe to do impact test, is a test instrument used to evaluate the impact resistance of materials.		 Jinan Liangong Testing Technology Co.,Ltd
		Model	XJL-300B	
		Operating temperature	10-35 ℃	
		Hammer mass	0.250-15.000kg 0.1kg / increments	
		Worktable travel	0-400mm	
		Sample diameter	10-400mm	
		Hammer radius	D25mm D90mm	
		Maximum impact height	2000mm	
		Height positioning error	± 2mm	
		Power supply	AC 220V ± 10% 2A	
		Dimensions	700* 700 * 3300mm	
		Weight	About 450kg	
		Manual Notch Sample Making Machine	QK-20	
Shape and size of Cutting tools	A 45°±1° R0.25±0.05			
	B 45°±1° R1±0.05			
	C 45°±1° R0.1±0.05			
Maximum Stroke	20mm			
Overall dimension	460*250*240mm			



Jinan Liangong Testing Technology Co.,Ltd

Item	Model	Main Technical Parameters for Reference		Reference Picture
Automatic Notch Sample-maki ng Machine	ZQK-20	Model	ZQK-20	 Jinan Liangong Testing Technology Co.,Ltd
		Milling tool length	50mm	
		Notch cutter spindle speed	0-325 rpm / minute milling	
		Notch jaw length	90mm (20pcs standard sample one-time)	
		Notch cutter tool diameter	60mm	
		Size	420 * 300 * 310mm	
		Notch gap milling cutter speed	1300r / min	
		Notch gap Tool shape and size	A type $45^{\circ} \pm 1^{\circ}$ R 0.25 ± 0.05 B type $45^{\circ} \pm 1^{\circ}$ R 1 ± 0.05 C type $45^{\circ} \pm 1^{\circ}$ R 0.1 ± 0.05	



Jinan Liangong Testing Technology Co.,Ltd

Brief Introduction

1.About our company

Shandong Liangong Group, a well-known enterprise in testing machines industry as well as a state-level high-tech enterprise, which specialized in R & D, production and sales of testing equipment for metal and nonmetal materials. Liangong Group include **Jinan Liangong Testing Technology Co.,Ltd**, **Shandong Liangong Testing Machine Co.,Ltd**, **ASTM Testing Equipment Co.,Ltd**. Our company covers an area of 30,000 square meters, construction area of 10,000 square meter, with a total investment of 80 million yuan. Our company has a well experienced, strong and large-scale R & D team,with 15 senior technical engineers, 75 general technical staff, 30 managers, 40 sales and after-sales staff; And it is based on high-quality technical personnel, by means of advanced science and technology, strong production capacity and financial support, and we cooperate with many domestic and foreign well-known educational institutions and research institutions closely to make our company be in domestic leading position in research and development of new products.







Jinan Liangong Testing Technology Co.,Ltd

Shandong Liangong Group based on the original performance, other equipment are also improved constantly. For example, our company developed the low-temperature automatic impact testing machine. We use advanced technology to enable the steel bar bend testing machine to further meet the needs of steel bar bend test. In the universal testing machine side, we adopted the independent control technology and developed the high-end electro-hydraulic servo universal testing machine and high end electronic universal testing machine, which make our universal testing machine in the leading level of testing machine industry..



Contact: Ms. Laura +86 18854162189 (Mobile/Wechat/ Whatsapp) **Tel:**(+86) 531-68818878 **Email:** Lgtester4@testermachine.com **Web:** www.lgtester.com
www.testermachine.com **Add:** No. 1 Liangong Street, Jinan North High-speed Rail Hub Economic Cooperation Zone, Qihe, Shandong, China



Jinan Liangong Testing Technology Co.,Ltd

Shandong Liangong Group is on the principle of profession and leadership and work at studying and manufacturing material mechanics performance and laboratory instruments and so on. We design customized solutions for customers, and our products always keep advanced level in domestic market. With reliable quality, prestige first and service in time, our company and products are widely welcomed by the new and old customers. We are looking forward to cooperating with you sincerely! For more information, please visit our website or contact us.



Contact: Ms. Laura +86 18854162189 (Mobile/Wechat/ Whatsapp) **Tel:** (+86) 531-68818878 **Email:** Lgtester4@testermachine.com **Web:** www.lgtester.com
www.testermachine.com **Add:** No. 1 Liangong Street, Jinan North High-speed Rail Hub Economic Cooperation Zone, Qihe, Shandong, China



Jinan Liangong Testing Technology Co.,Ltd

Shandong Liangong Group based on the objective of customer service, quick development and growth, through the long time effort and improvement, now our company's products have nine main series, covering more than one hundred kinds of products. Like impact testing machine, low temperature machine, impact specimen gap broaching machine, charpy projector, universal testing machine, bending testing machine, cupping testing machine, torsion testing machine, compression testing machine, gauge machine, metallographic sample testing machine, hardness testing machine, etc. which have been widely used in all kinds of industries like metallurgical industries, mechanical manufacturing enterprises, aerospace industries, ordnance factories, railway, automobile, ship, pressure vessel, springs, steel tube, rubber, plastics, etc. We have long-term cooperative relationship with many famous companies, such as Shougang Group, AnShan Iron and Steel Group Cooperation, Baosteel Group Cooperation, Nanjing Iron&Steel, Tianjin Pipe(Group) Cooperation, North China Petroleum Steel Pipe Co., Ltd, as well as some well-known colleges and institutes, such as China Academy of Engineering Physics, China Building Materials Academy, Institute of Physics and Chemistry, CAS, China Coal Research Institute, University of Shanghai for Science and Technology, Wuhan University, Peking University, Southwest Petroleum University. Jinan Liangong has become the first choice of users in domestic testing machine industry.

Shandong Liangong Group is paying more attention to foreign markets while strengthens domestic sales. ASTM Testing Equipment Co., Ltd mainly deals with international sales and registered < Registration Certificate of Consignors and Consignees of Imports and Exports of the People's Republic of China > and obtained independent imported and exported qualification. Some of our products have passed international CE certification, ISO9001 certification and so on. Now ASTM Testing Equipment Co., Ltd has become a leading company in the international business of testing machine industry and the quality of our products have been highly valued by foreign customers.



2. Production Shop

Our new factory

















Jinan Liangong Testing Technology Co.,Ltd

