

EMS Dashboard

Connected

Supervisory Python EMS with six scenarios, manual scenario control, manual price input, virtual battery charge, hydrogen estimation and live INA measurements in V, mA and mW.

Demo and EMS control

EMS: started

Start the EMS system first. Then start the demo to reset the 96-slot timeline, begin CSV logging and activate the variable load trigger. Raw logging can run independently of the demo.

Bridge: OK

Reset

Start EMS system

Stop EMS system

Start demo + logging

Stop demo

Auto mode

Manual mode

Start raw log

Raw log Stopped	Raw log file -
Raw samples 0	Last raw update -

Price test date

09 / 05 / 2026

Load prices for date

Manual electricity price

0.91599

Apply manual price

Hydrogen estimation (%)

72.6

Initiate H2 estimation manually

Virtual battery charge state (%)

77.0

Apply virtual battery state

Control mode
manual

Demo status
Stopped


Current slot
95

Scenario
S1

System state timeline

One plot showing the selected price curve, demand profile and measured INA power in mW for PV, load, battery and PEM. Scenario background is shown where a slot has been logged.

- Price
- Price threshold
- Demand
- PV power
- Load power
- Battery power
- PEM power

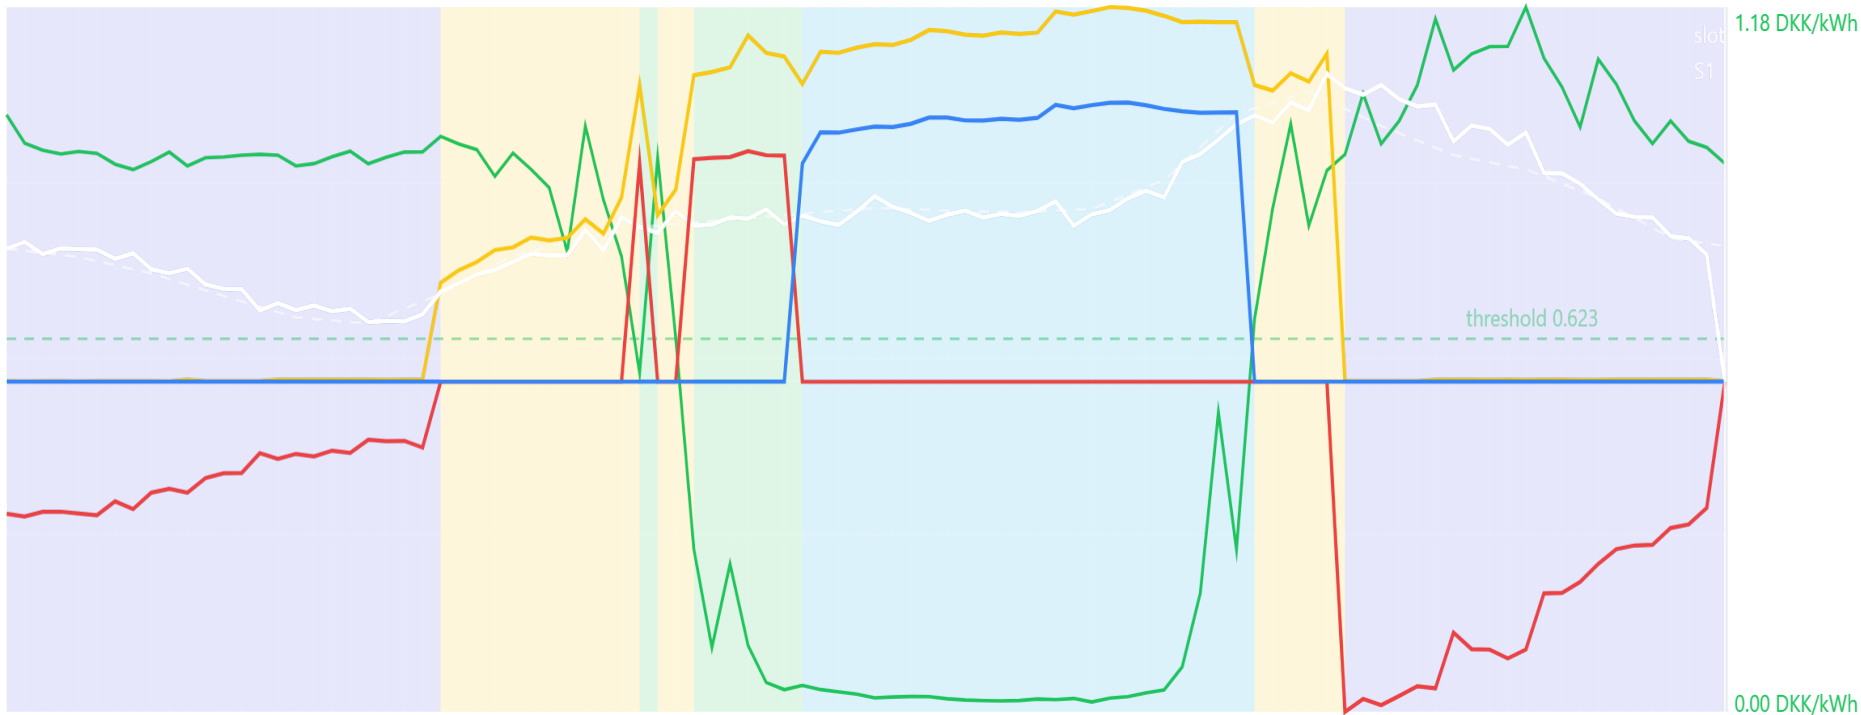

Time
23:45

Interval
23:45-00:00

Price
0.91599 DKK/kWh

Demand
35.0 mW

PV power
0.1 mW

Load power
-0.0 mW

Battery power
-0.1 mW

PEM power
-0.1 mW

Virtual battery charge
77.0 %

Hydrogen estimation
72.6 %

Actual scenario
S1

Current EMS decision

One 96-slot demo cycle was completed. Demo logging was stopped, the variable load trigger was disabled, and the system was returned to safe S1.

EMS system Started

Target scenario S1

Actual scenario S1

Reject reason

Price state HIGH

Current price 0.91599 DKK/kWh

Manual scenarios

Selecting a scenario switches the EMS to manual mode and sends the scenario once.

S1 Grid → Load

S2 Grid → Load, PV → Battery

S3 Grid → Load, PV → PEM

S4 PV → Load

S5 Battery → Load

S6 PEM → Load

Current demand	35.0 mW
PV available	No
Log file	/app/python/logs/ems_demo_20260512_151511.csv
Last log update	Demo cycle completed at 2026-05-12T15:39:12+02:00
Error	-

Storage states

Current battery voltage	3.682 V
Initial SoC lookup voltage	3.692 V
Lookup-estimated real battery SoC	4.5 %
Integrated real battery SoC	4.6 %
Integrated real battery charge	91.266 mAh / 2000.0 mAh
Virtual battery SoC	77.0 %
Virtual battery capacity	10.00 mAh
Virtual battery charge	7.705 mAh
Virtual battery state	medium

INA sensor measurements

PV voltage	2.884 V
Battery voltage	3.682 V
PEM voltage	1.281 V
Load voltage	5.110 V
PV current	0.03 mA
Battery current	-0.03 mA
PEM current	-0.04 mA
Load current	-0.01 mA
PV power	0.07 mW

Hydrogen volume	13.41 mL
Usable hydrogen	5.81 mL
Hydrogen estimation	72.6 %
Hydrogen mode	idle

Battery power	-0.09 mW
PEM power	-0.05 mW
Load power	-0.04 mW
Load trigger	LOW
Arduino mode	S1 Grid -> Load