




DSD8

Submersible Borehole Pumps

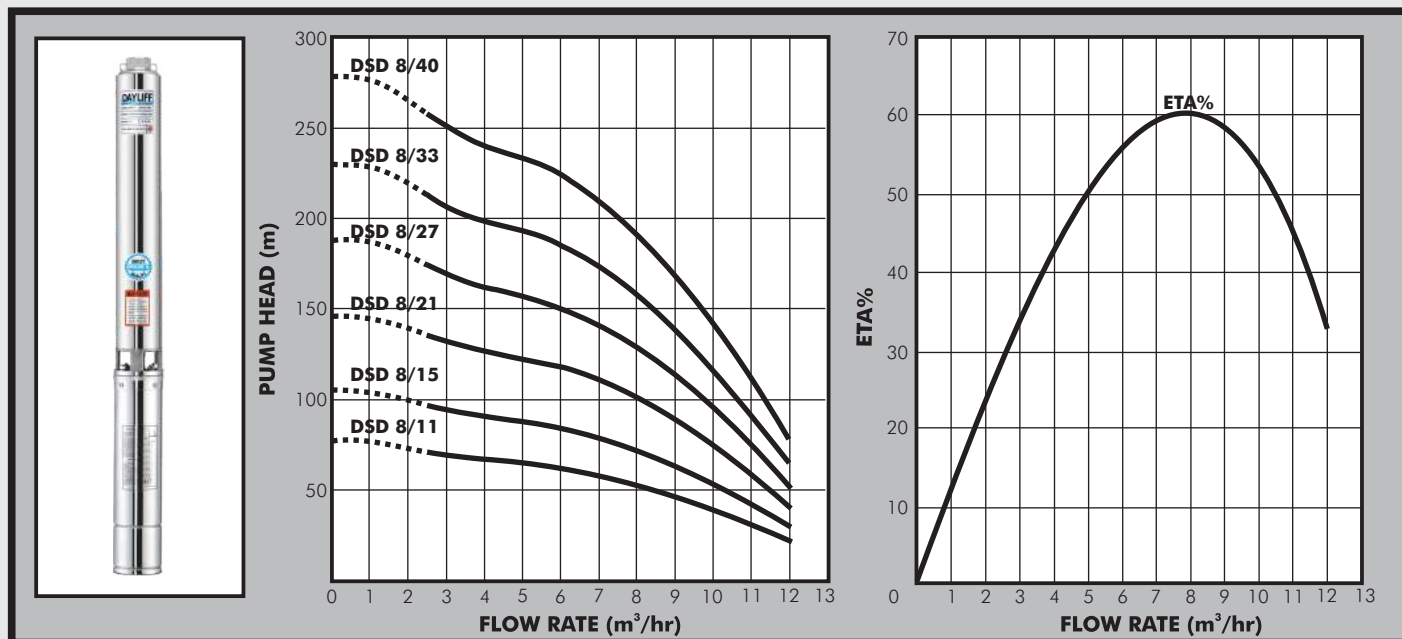

PUMP

DAYLIFF DSD range of submersible multistage centrifugal pumps are specially designed for water supply from wells and boreholes. Material of construction include polycarbonate impellers and diffusers, AISI 201 stainless steel delivery and suction chambers and AISI 304 stainless steel pump housing, shaft and shaft coupling. These corrosion resistant materials together with the advanced hydraulic design provide the pumps with excellent sand handling capabilities for a longer life and operational efficiency. DSD8/11 is supplied complete with 30m cable and a control box.

MOTOR

The pump is coupled to a sealed liquid cooled 2-pole asynchronous squirrel-cage motor constructed of stainless steel. Single phase motors should be supplied with purpose designed Dayliff SCM control boxes for operation and protection against overload, dry running and over/under voltage. Three phase motors require a remote DOL starter; A DAYLIFF SCT electronic Pump Controller is recommended for comprehensive pump control including low level, motor overload and irregular power supply protection.

Enclosure Class: IP68

Insulation Class: B

Speed: 2900rpm

PUMP KITS

Pump Kits are available for the indicated*models including pump, quick connection fittings, cast aluminium well head cover, Safety rope and Dayliff SCM/SCT Controller.

The kit is provided with 90m waterproof power cable for both single phase and three phase pumps.

OPERATING CONDITIONS

Pumped liquid: Thin, clean, chemically non-aggressive liquids with a maximum particle size of 2.3mm

Max. Water temperature: +35°C

Max. immersion depth: 150m

Min. borehole diameter: 110mm

PUMP DATA

Model	Motor		Voltage (V)	Current (A)	Istart	DN (")	Dimensions (mm)		Weight (kg)
	kW	HP			I		A	D	
DSD 8/11	1.5	2.0	1x240	10.5	4	2	647	1142	20
DSD 8/15*	2.2	3.0		16.2			829	1414	26
			3x415	6.1	7			1364	23
7.3	1052	1653		28					
9.5	1308	2014		35					
12.2	1531	2337		42					
DSD 8/40	7.5	10		14.6			1825	2731	49

