


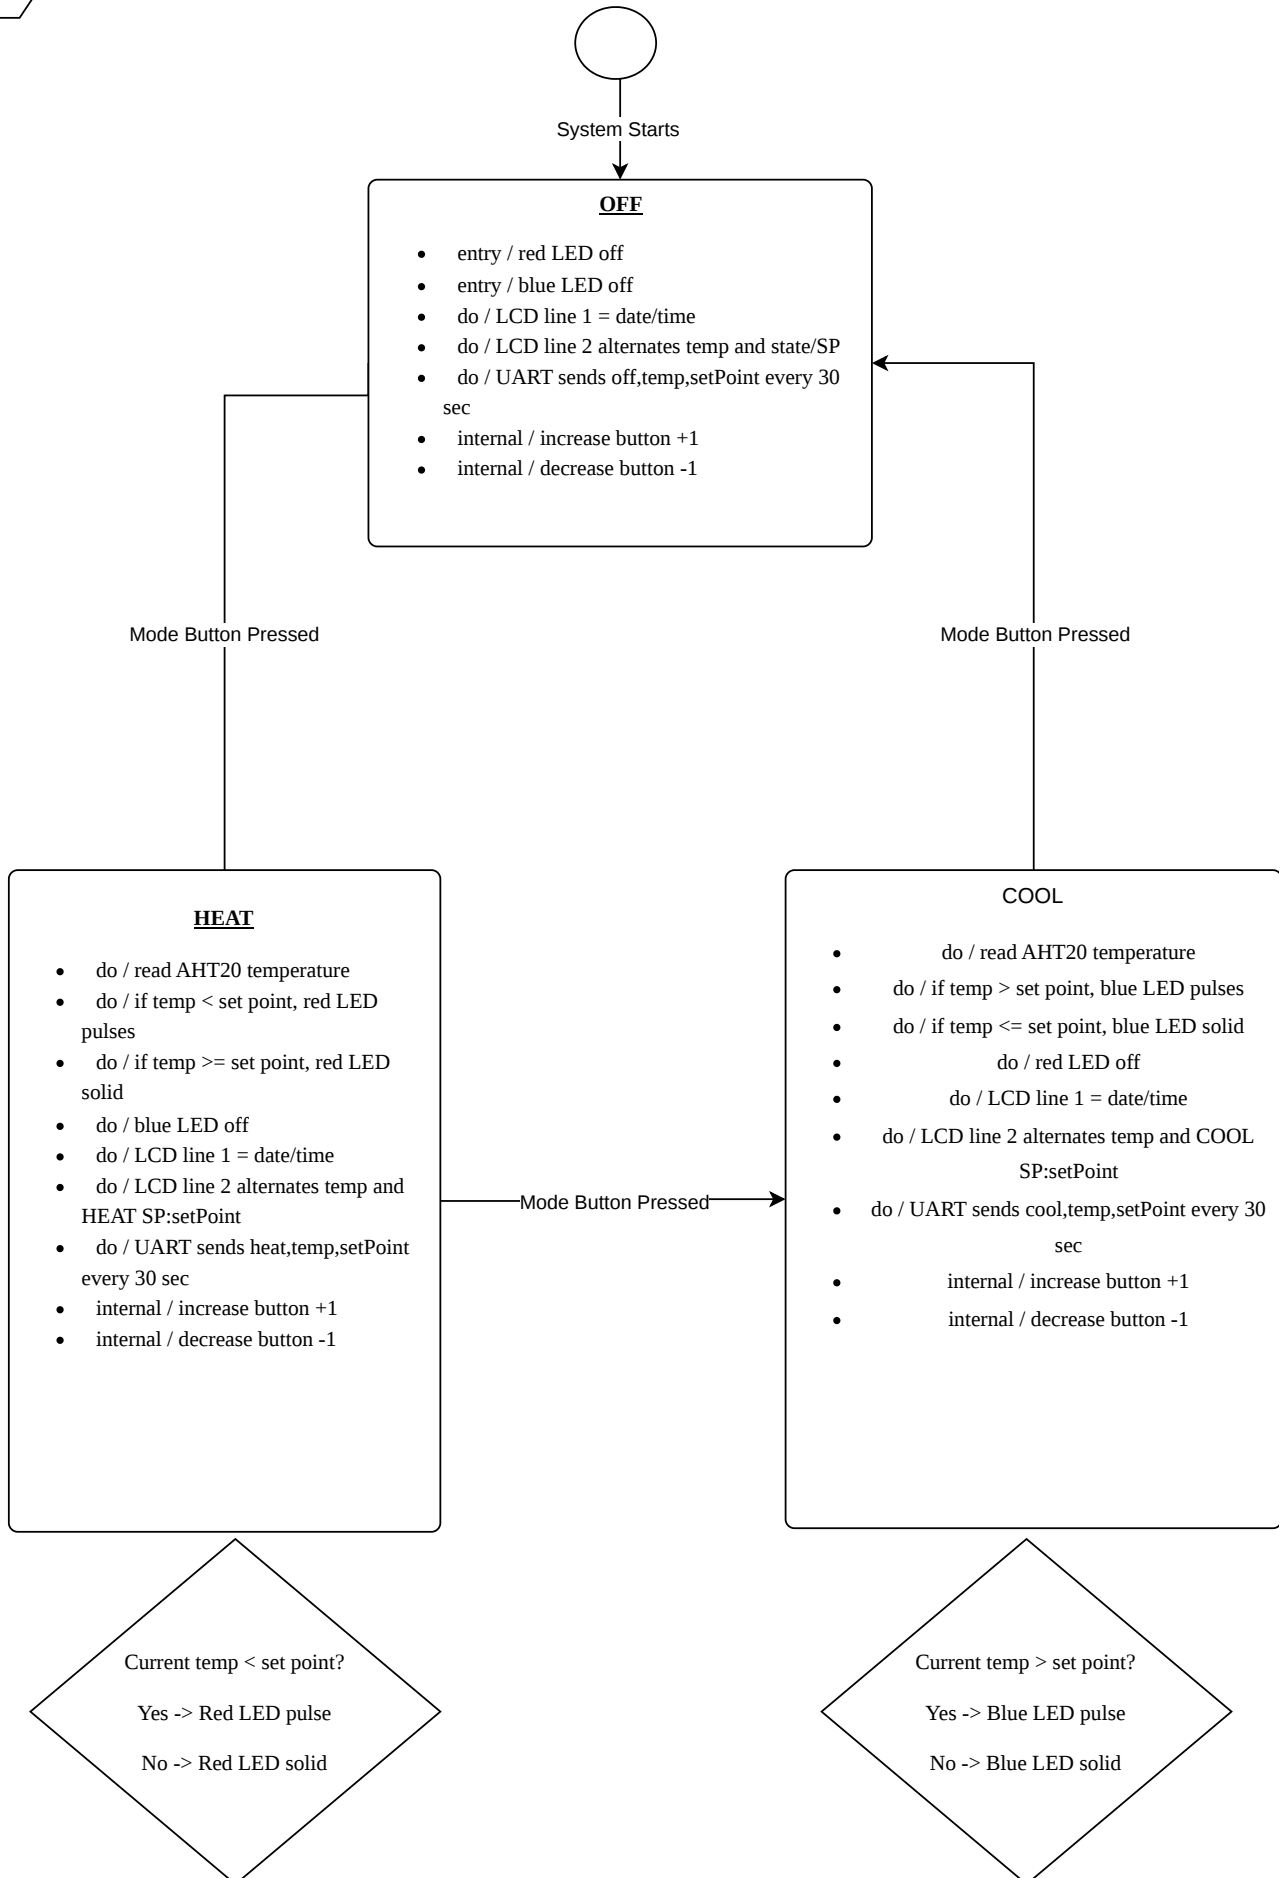

Peripherals

- AHT20 temperature sensor via I2C
- Red LED on GPIO 18
- Blue LED on GPIO 23
- Mode button on GPIO 24
- Increase button on GPIO 25
- Decrease button on GPIO 12
- 16x2 LCD display
- UART serial output

Startup

- Initial state = Off
- Default set point = 72 F

UART Output

- Update every 30 seconds
- Comma-delimited string
- Format: state, currentTemp, setPoint