



US 20130278962A1

(19) **United States**

(12) **Patent Application Publication**
Coffey et al.

(10) **Pub. No.: US 2013/0278962 A1**

(43) **Pub. Date: Oct. 24, 2013**

(54) **SYSTEM FOR MONITORING AND
MODIFYING OPERATION OF AN
ELECTRICAL ENERGY CONSUMING
DEVICE CORRESPONDING TO
ELECTRICAL ENERGY CONSUMPTION**

Publication Classification

(51) **Int. Cl.**
G06K 15/00 (2006.01)
(52) **U.S. Cl.**
CPC **G06K 15/4055** (2013.01)
USPC **358/1.14**

(71) Applicant: **Xerox Corporation**, Norwalk, CT (US)

(72) Inventors: **David F. Coffey**, Portland, OR (US);
Brent R. Jones, King City, OR (US)

(21) Appl. No.: **13/918,217**


(22) Filed: **Jun. 14, 2013**

Related U.S. Application Data

(62) Division of application No. 12/815,943, filed on Jun. 15, 2010.

(57) **ABSTRACT**

A system adjusts at least one operational parameter for at least one electrical energy consuming device. The system monitors electrical energy consumption measurements for operational activity periods, identifies an electrical energy consumption measurement difference between an electrical energy consumption measurement for an operational activity period and an electrical energy consumption measurement for a corresponding operational activity period, and modifies an operational parameter for the electrical energy consuming device in response to the difference being greater than a predetermined threshold. The modified operational parameter is sent to the electrical energy consuming device to enable modified operation of the electrical energy consuming device.

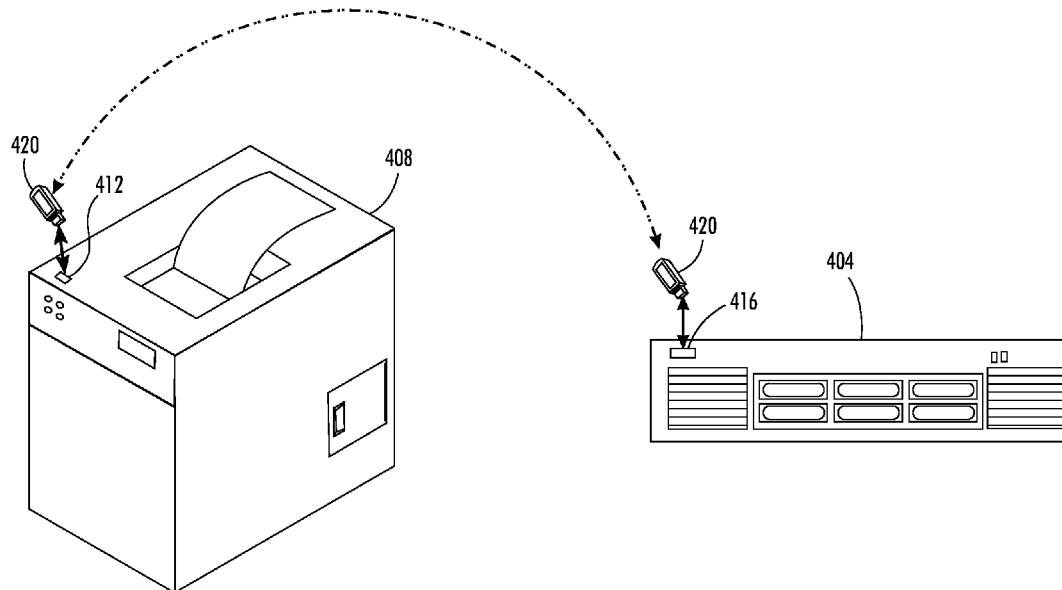

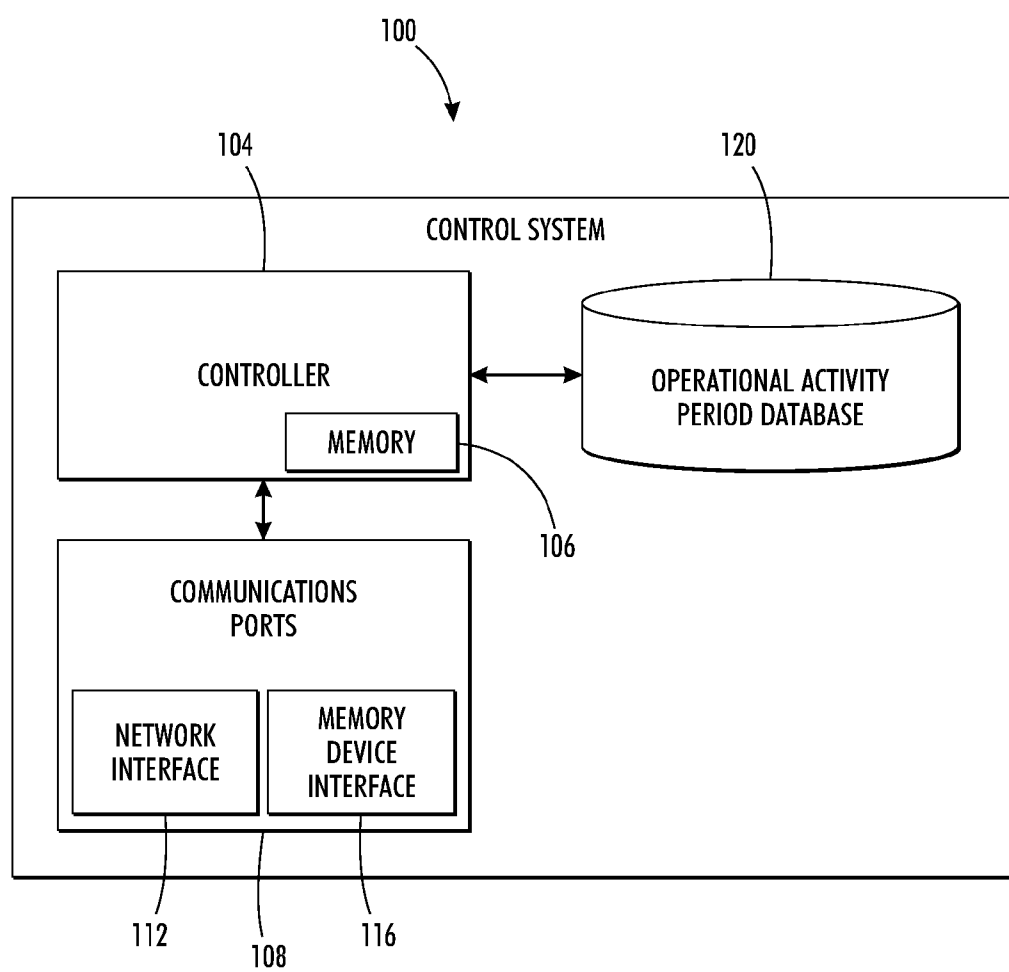


FIG. 1

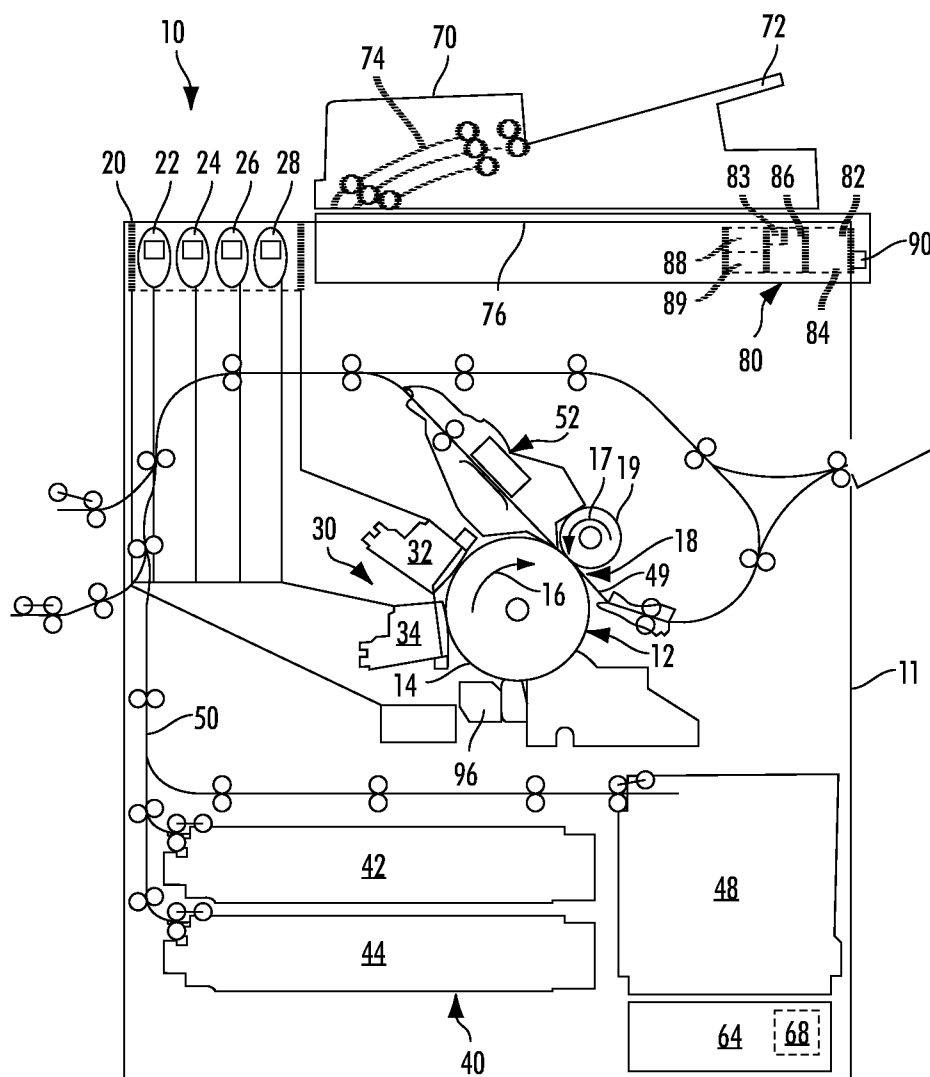


FIG. 2

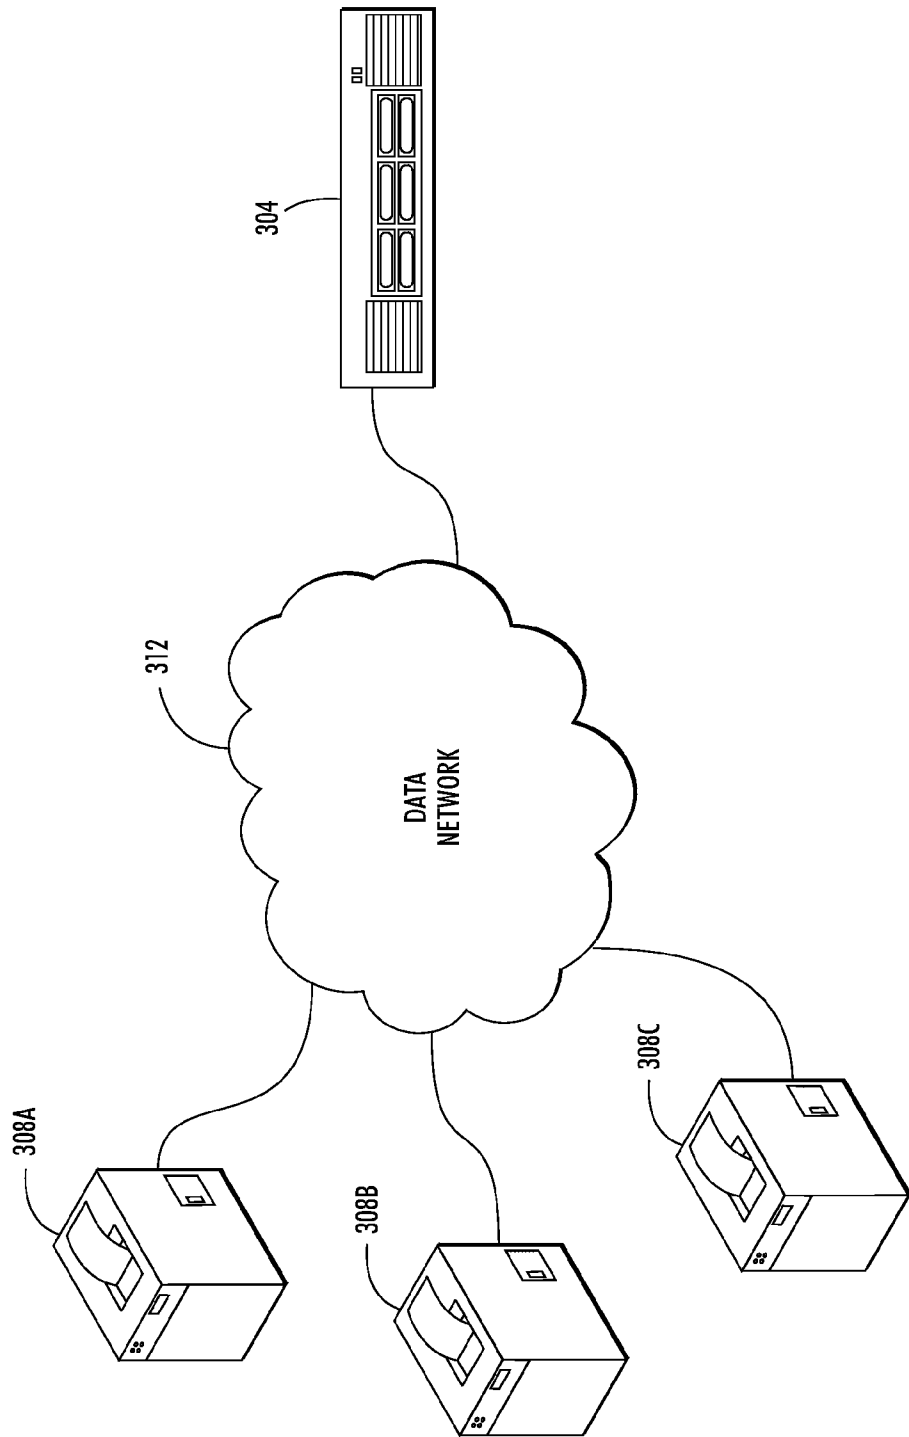


FIG. 3

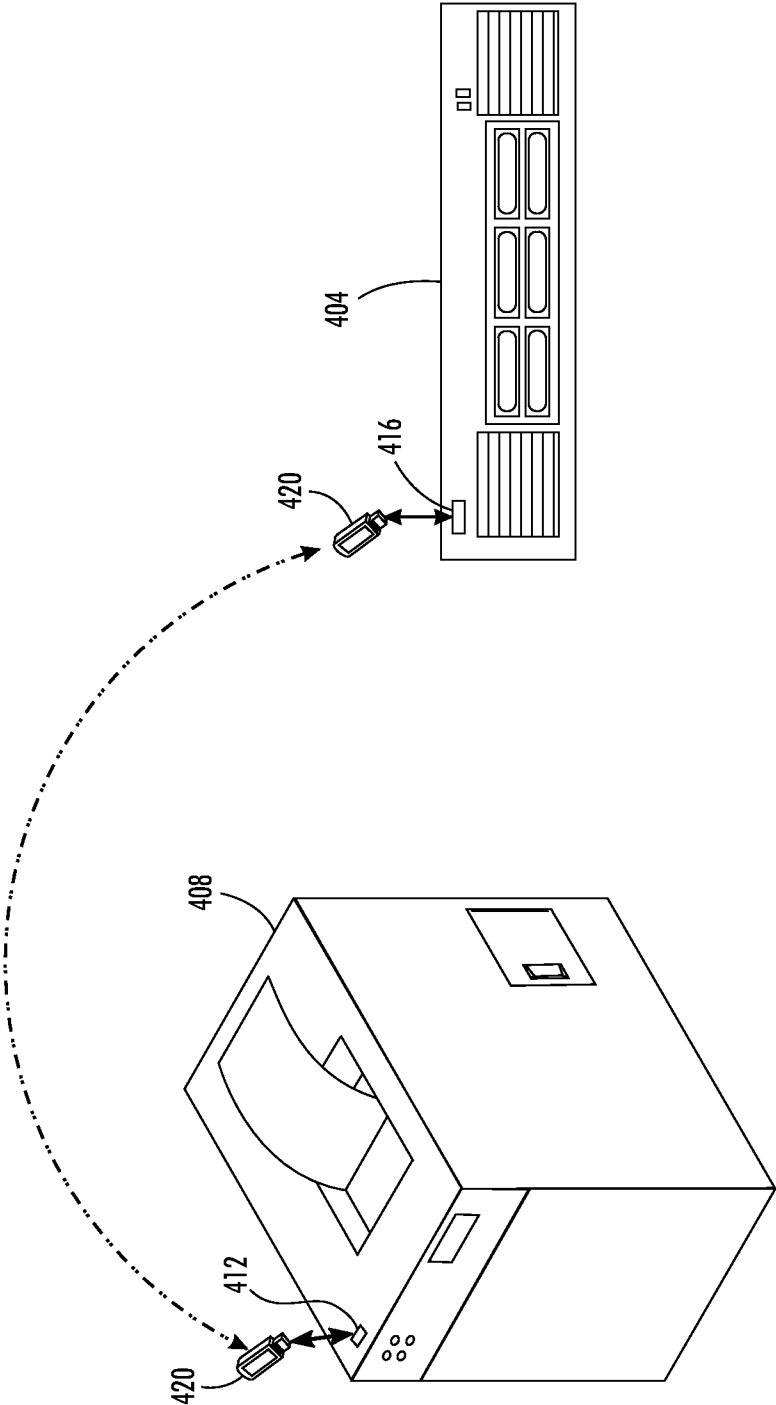


FIG. 4

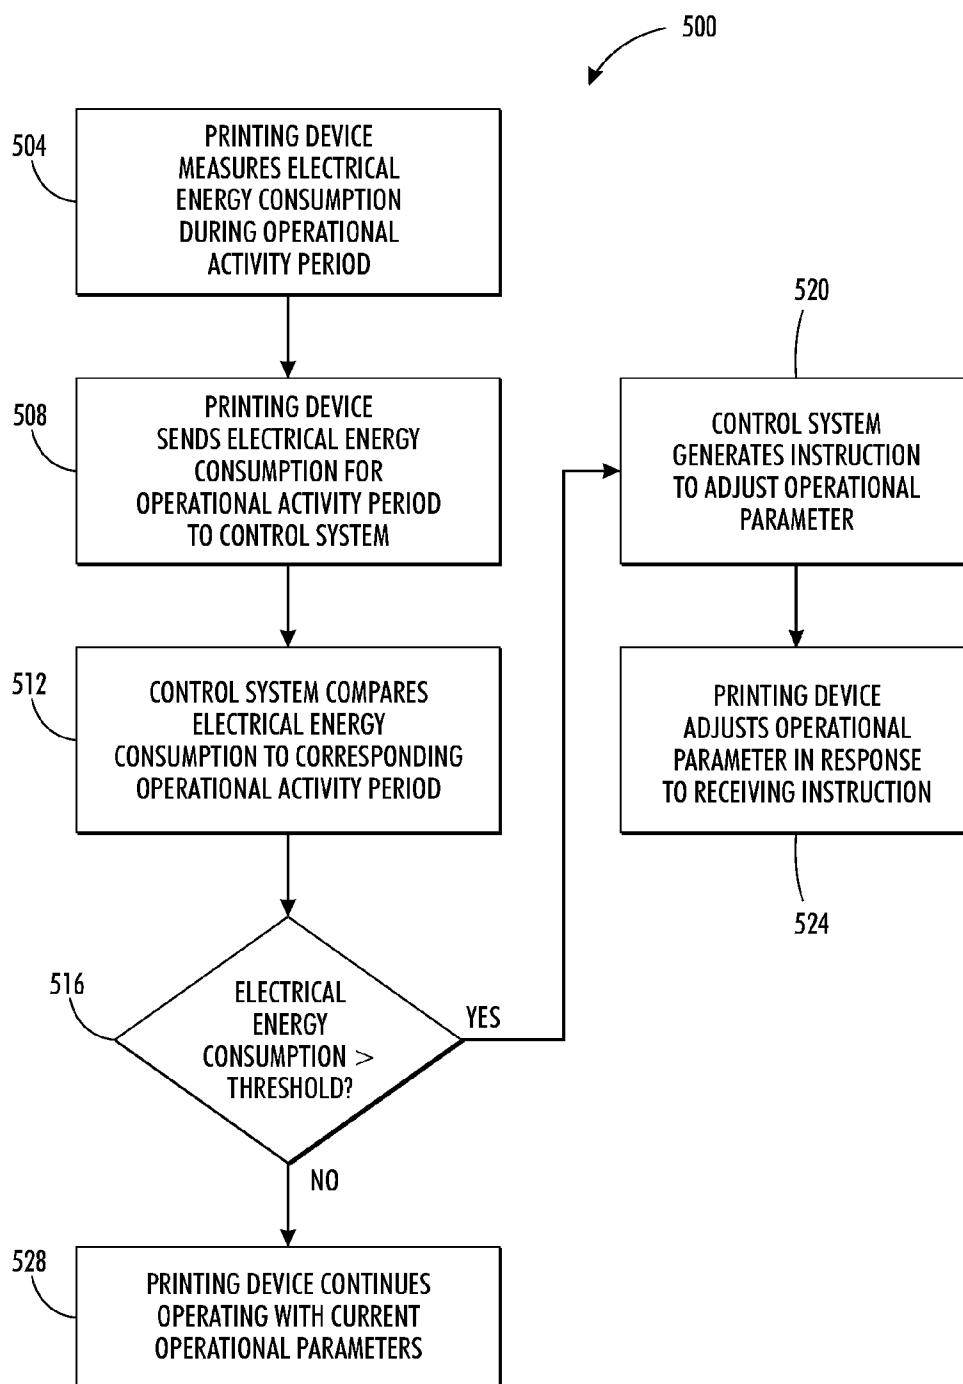


FIG. 5

**SYSTEM FOR MONITORING AND
MODIFYING OPERATION OF AN
ELECTRICAL ENERGY CONSUMING
DEVICE CORRESPONDING TO
ELECTRICAL ENERGY CONSUMPTION**

CLAIM OF PRIORITY

[0001] This application claims priority to and is a divisional application of U.S. patent application Ser. No. 12/815,943, which is entitled "System And Printing Device For Monitoring and Modifying Operation Of A Printing Device Corresponding To Electrical Energy Consumption," which was filed on Jun. 15, 2010 and which issued as U.S. Pat. No. _____ on mm/dd/yyyy.

TECHNICAL FIELD

[0002] This disclosure relates to the field of printing systems, and more particularly, to a system that adjusts an operational parameter of a printing device after monitoring electrical energy usage of the printing device.

BACKGROUND

[0003] Various types of imaging devices are commonly used in industry to form images on print media such as paper. Common examples of imaging devices are printing devices including laser printers, LED printers, and drop-on-demand ink printers, such as inkjet printers employing aqueous or phase change inks. While these various printing devices may employ different techniques to form images on print media, common printing devices typically consume electrical energy when activated. Electrical energy is consumed at varying rates during imaging operations, during printer maintenance operations, and also during periods of inactivity between imaging operations. Different classes of printing device may consume different amounts of electricity depending upon various factors including how many sheets of print media each printing device images during a given time period.

[0004] The cost of electrical energy is one component in the overall cost of using a printing device. When comparing different printing devices, a disparity in electrical energy consumption between different printing systems may make a particular printing device appear to be less economical to operate. However, printing devices that consume additional electrical energy may be more efficient in other areas, including having improved throughput, colorant usage, and image quality. Additionally, the overall energy efficiency of a printing system may include factors that offset the reduced efficiency caused by the printing system consuming a moderately greater amount of electrical energy in operation. A printing system that produces comparatively less waste material may consume less overall energy during the printing system's lifetime, and solid ink printers have this advantage over other common printing systems. However, these advantages in energy efficiency are less visible than a direct measurement of operational electrical energy consumption. Thus, operating printing devices in a manner that reduces visible cost disparities due to electrical energy consumption improves the efficiency of operating printing devices and benefits the field of printing.

SUMMARY

[0005] A system adjusts at least one operational parameter for at least one electrical energy consuming device. The sys-

tem includes a communication port configured to receive electrical energy consumption measurements for operational activity periods from at least one electrical energy consuming device, and a controller communicatively connected to the communication port to receive the electrical energy consumption measurements for operational activity periods from each electrical energy consuming device communicatively connected to the communication port, the controller being configured to identify an electrical energy consumption measurement difference between an electrical energy consumption measurement for an operational activity period that was received from a first electrical energy consuming device and an electrical energy consumption measurement for a corresponding operational activity period that was stored in memory communicatively connected to the controller, and the controller being configured to modify an operational parameter for the first electrical energy consuming device in response to the difference being greater than a predetermined threshold and to communicate the modified operational parameter to the first electrical energy consuming device through the communication port to enable modified operation of the first electrical energy consuming device.

[0006] A printing device provides the system that modifies operational parameters with electrical energy consumption measurements that are used to modify the operational parameters. The printing device includes an electrical power supply, an electrical power measuring circuit operatively connected to the electrical power supply and configured to measure electrical power usage of the electrical power supply, a communication port, and a printer controller operatively coupled to the electrical power measuring circuit and the communication port, the printer controller configured to receive a measurement of electrical energy usage during a predetermined time period from the electrical power measuring circuit, to identify an operational activity period for the electrical usage measurement, and to communicate the electrical energy usage measurement for the operational activity period to a monitoring system through the communication port.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] FIG. 1 is a schematic diagram of a control system suitable for monitoring and modifying operational parameters of one or more printing devices.

[0008] FIG. 2 is a schematic diagram of a printing device configured to communicate with a control system.

[0009] FIG. 3 is a schematic diagram of multiple printing devices communicatively coupled to a control system via a data communications network.

[0010] FIG. 4 is a schematic diagram of a printing device communicatively coupled to a control system via a memory device.

[0011] FIG. 5 is a block diagram of a process for monitoring electrical energy usage of a printing device and for adjusting an operational parameter of the printing device.

DETAIL DESCRIPTION

[0012] For a general understanding of the environment for the system and method disclosed herein as well as the details for the system and method, reference is made to the drawings. In the drawings, like reference numerals have been used throughout to designate like elements. As used herein, the word "printer" encompasses any apparatus that performs a print outputting function for any purpose, such as a digital

copier, bookmaking machine, facsimile machine, a multi-function machine, or the like. The description presented below is directed to a printing system that monitors its electrical energy consumption over time, reports the electrical energy usage to a control system, and adjusts an operational parameter in response to instructions received by the control system. The instructions may be generated automatically based on predetermined criteria configured in the control system, or through manual input into the control system based on energy consumption information and comparative data forming the basis for recommended operational adjustments. As used herein, “control system” refers to a computing device or combination of computing devices configured to receive and process energy usage measurements generated by one or more printing devices, to compare the energy usage measurements to predetermined energy usage thresholds stored in a memory, and to generate an instruction that a printing device follows to adjust an operational parameter. The term “comparative energy consumption” as used herein refers either to an estimate of energy consumption for an alternative printing device having comparable performance to the printer being monitored by the control system, or to a measurement of actual energy consumption for either the alternative device or the monitored printing device during a known time period. The form of energy consumed is typically electrical energy, although thermal, mechanical, or chemical energy consumption may be compared as well. A “comparative energy consumption record” refers to a machine readable data representation of a comparative energy consumption measurement or estimate. Comparative energy consumption records of alternative printing devices may be recorded and stored in a data storage device operatively coupled to the control system for later retrieval.

[0013] A schematic block diagram of an embodiment of a control system **100** is depicted in FIG. 1. Control system **100** includes a controller **104** that is configured to send and receive data with a communication port **108** and to store and read information from operational activity database **120**. Typical embodiments of controller **104** include a microprocessing device such as a central processing unit (CPU), an application specific integrated circuit (ASIC), a field programmable device, or a microcontroller. Controller **104** is further configured to run a plurality of commands encoded in software stored in a memory **106**. Communication ports include a network interface **112** and a memory device interface **116**. Examples of network interfaces include wired network interfaces, such as Ethernet network interfaces or dial-up modem interfaces. Alternatively, the network interface may be wireless including a wireless transceiver employing the IEEE 802.11 family of protocols, or a 3G or 4G wide area network transceiver. Network interface **112** is configured to send and receive data from one or more printing devices using a data communications network, with typical examples of data communications networks including packet switched networks, such as a local area network (LAN) or wide area network (WAN) employing an Internet Protocol (IP) based communication scheme. Another communication port is memory device interface **116**. Memory device interface **116** places a removable data storage device in communication with controller **104** when the removable data storage device is connected to memory device interface **116**. Common examples of a memory device interface include a universal serial bus (USB) port, an IEEE 1394 port, a floppy disk drive, an optical drive such as a CD-ROM or DVD-ROM drive, an

external Serial Advanced Technology Attachment (eSATA) port, a media card reader such as a Secure Digital (SD) card reader, or a wireless interface such as a Bluetooth interface adapted to communicate with a data storage device.

[0014] Operational activity database **120** is a data storage device configured to store a plurality of comparative energy consumption records corresponding to operational activity periods of one or more printing devices during a predetermined time period. An example operational activity period refers to a printing device that prints 1,500 pages during a seven day period. This operational activity period corresponds to an amount of electrical energy that the device consumes during a seven day period given that it is printing 1,500 pages. An alternative operational activity period measures an amount of colorant used during a predetermined time period. Other factors suitable for use in measuring operational activity periods include a number of images or the total pixel count generated by the device during a time period. The records in operational activity database **120** may refer to a second printing device employing a different printing technique than the printing devices placed in communication with control system **100**. For example, if a group of solid-ink printing devices were being monitored by control system **100**, their measured power usage may be compared to power usage estimates or recorded measurements of a laser printer having a configuration and level of operational use similar to those of the solid-ink printing devices. The activity profiles in operational activity database **120** may also refer to a second configuration of the printing devices placed in communication with control system **100**. For example, one operational activity period may include printing 1,500 pages during a seven day period where the pages are printed in a lower “draft” quality mode, while another operational activity period corresponds to printing the same number of pages in a high-quality mode. The operational activity periods for each configuration may have a different associated energy usage estimate or measurement.

[0015] Referring now to FIG. 2, an embodiment of an imaging device, such as a high-speed phase change ink image printing device or printer **10**, is depicted. As illustrated, printing device **10** includes a frame **11** to which are mounted directly or indirectly all its operational subsystems and components, as described below. To start, the high-speed phase change ink image printing device **10** includes an image receiving member **12** that is shown in the form of a drum, but can equally be in the form of a supported endless belt. The image receiving member **12** has an imaging surface **14** that is movable in the direction **16**, and on which phase change ink images are formed. A transfix roller **19** rotatable in the direction **17** is loaded against the surface **14** of drum **12** to form a transfix nip **18**, within which ink images formed on the surface **14** are transfixed onto a heated media sheet **49**.

[0016] The high-speed phase change ink image printing device **10** also includes a phase change ink delivery subsystem **20** that has at least one source **22** of one color phase change ink in solid form. The example phase change ink image printing device or printer **10** is a multicolor image printing device. The ink delivery system **20** includes four (4) sources **22**, **24**, **26**, **28**, representing four (4) different colors CMYK (cyan, magenta, yellow, black) of phase change inks. The phase change ink delivery system also includes a melting and control apparatus (not shown) for melting the solid form of the phase change ink into a liquid form. The phase change ink delivery system is suitable for supplying the liquid form to

a printhead system **30** including at least one printhead assembly **32**. Printing device **10** is a wide format high-speed, or high throughput, multicolor image printing device. The printhead system **30** includes multiple multicolor ink printhead assemblies, **32** and **34** as shown. In the embodiment illustrated, each printhead assembly further consists of two independent print-heads. The total number of four printheads is staggered so that the array of printheads covers substantially the full imaging width of the largest intended media size. Solid ink printers may have one or any number of any size printheads that may jet any number of ink colors and may be arranged in any practical manner.

[0017] As further shown, the phase change ink image producing device or printer **10** includes a substrate supply and handling system **40**. The substrate supply and handling system **40**, for example, may include sheet or substrate supply sources **42**, **44**, **48**, of which supply source **48**, for example, is a high capacity paper supply or feeder for storing and supplying image receiving substrates in the form of cut sheets **49**, for example. The substrate supply and handling system **40** also includes a substrate handling and treatment system **50** that has a substrate heater or pre-heater assembly **52**. The phase change ink image producing device or printer **10** as shown may also include an original document feeder **70** that has a document holding tray **72**, document sheet feeding and retrieval devices **74**, and a document exposure and scanning system **76**.

[0018] Operation and control of the various subsystems, components and functions of the printing device **10** are performed with the aid of a controller or electronic subsystem (ESS) **80**. The ESS or controller **80**, for example, is a self-contained, dedicated mini-computer having a central processor unit (CPU) **82** with electronic storage **84**, and a display or user interface (UI) **86**. The ESS or controller **80**, for example, includes two communication ports, network interface port **88** and memory interface port **89**. Controller **80** also includes sensor interface **83** that is configured to receive electrical energy consumption levels generated by power measurement circuit **68**. In addition, the CPU **82** reads, captures, prepares, and manages the image data flow between image input sources, such as the scanning system **76**, or an online or a work station connection **90**, and the print head assemblies **32** and **34**. As such, the ESS or controller **80** is the main multi-tasking processor for operating and controlling all of the other machine subsystems and functions, including the duplex printing process discussed below.

[0019] The controller **80** may be implemented with general or specialized programmable processors that execute programmed instructions. The instructions and data required to perform the programmed functions may be stored in memory associated with the processors or controllers. The processors, their memories, and interface circuitry configure the controllers to perform the processes, described more fully below, that enable the image receiving member **12** to continue to rotate during some duplex printing operations. These components may be provided on a printed circuit card or provided as a circuit in an application specific integrated circuit (ASIC). Each of the circuits may be implemented with a separate processor or multiple circuits may be implemented on the same processor. Alternatively, the circuits may be implemented with discrete components or circuits provided in VLSI circuits. Also, the circuits described herein may be implemented with a combination of processors, ASICs, dis-

crete components, or VLSI circuits. Multiple controllers configured to communication with the main controller **80** may also be used.

[0020] The controller is coupled to an actuator **96** that rotates the image receiving member. The actuator may be an electric motor that the controller may operate at multiple speeds and also halt to carry out a printing process sequence. The controller of the present embodiment also generates signals for operating the components that position the transfix roller and the release agent applicator with reference to the image receiving member.

[0021] The various subsystems, components, and functions of the printing device **10** consume electrical energy in operation. Electrical power supply **64** provides electrical energy to printing device **10** at an appropriate voltage and amperage level. Electrical power supply **64** is typically configured to connect to an external source of electrical alternating current (AC), which electrical power supply **64** converts to direct current (DC) electricity consumed by various subsystems and components in the printer. Electrical power supplies that are commonly found in printing devices include switched-mode power supplies. An electrical power measurement circuit **68** is electrically connected to electrical power supply **64**. Electrical power measurement circuit **68** is configured to measure the instantaneous electrical power usage of electrical power supply **64**, and electrical power measurement circuit **68** is further configured to transmit the measurements to controller **80** via sensor interface **83**.

[0022] In operation, image data for an image to be produced are sent to the controller **80** from either the scanning system **76** or via the online or work station connection **90** for processing and output to the printhead assemblies **32** and **34**. Additionally, the controller determines and/or accepts related subsystem and component controls, for example, from operator inputs via the user interface **86**, and accordingly executes such controls. As a result, appropriate solid forms of differently colored phase change ink are melted and delivered to the printhead assemblies. Additionally, inkjet control is exercised with the generation and delivery of firing signals to the print head assemblies to form images on the imaging surface **14** that correspond with the image data. Media substrates are supplied by any one of the sources **42**, **44**, **48** and handled by substrate system **50** in timed registration with image formation on the surface **14**. The timing of the transporting of the media sheets to the nip, the regulation of the rotation speed for the image receiving member, and the positioning of the transfix member and release agent applicator are performed by the processes described above for appropriate printing operations. After an image is fixedly fused to an image substrate, the image bearing substrate is delivered to an output area.

[0023] During operation, controller **80** collects power consumption measurements from electrical power measurement circuit **68** via sensor interface **83**. Controller **80** identifies the electrical energy consumption of the printing device for an operational activity period during a predetermined time period from the collected power consumption measurements. Controller **80** also records an operational activity period that includes the number of media sheets imaged and the quantity of solid ink consumed during the predetermined time period. Controller **80** periodically sends the energy consumption for a corresponding operational activity period to a control system using either or both of network interface port **88** and memory interface port **89**. Controller **80** is also configured to receive modified operational parameter from the network

interface port **88** and memory interface **89**. Additionally, controller **80** is configured to receive reports identifying a difference between the measured electrical power consumption for an operational activity period of the printing device **10** and an electrical energy consumption measurement for a corresponding operational activity period sent from the control system. This difference may be reproduced on display **86** or otherwise be made available for inspection by a printer operator.

[0024] A depiction of a control system placed in communication with multiple printing devices is depicted in FIG. **3**. Control system **304** is communicatively coupled to printing devices **308A-308C** using data communications network **312**. Data communications network **312** is typically a local area or wide area network employing an internet protocol (IP) communication scheme, although alternative embodiments including communicating via modems over a circuit-switched telephony network are also envisioned. Control system **304** includes a network interface port allowing the control system to send and receive data via data communications network **312**. Each of the printing devices **308A-308C** has a corresponding network interface port configured to send and receive data via data communications network **312**. Electrical energy consumption measurements for operational activity periods are sent from each of printing devices **308A-308C** to control system **304**, and control system **304** compares the energy consumption measurements for operational activity periods to electrical energy consumption measurements for corresponding operational activity periods stored in an internal database that is communicatively connected to the controller. Control system **304** may send instructions modifying operational parameters to each of printing devices **308A-308C** via data network **312**. In the example of FIG. **3**, printing devices **308A-308C** may be multiple instances of the same printing device design, or may be printing devices having different designs and operational modes.

[0025] An alternative arrangement of a control system and a printing device is depicted in FIG. **4**. In FIG. **4**, printing device **408** and control system **404** are not configured to communicate with one another using a data network. This configuration may occur for several reasons, including when printing device **408** is operated in a high-security environment where access to external data networks is restricted, or for printing devices that are not equipped with a network interface port. Printer **408** includes a memory device interface **412**, and control system **404** includes a compatible memory device interface **416**. Memory device ports **412** and **416** are both configured to connect to a common memory device **420**. Memory device **420** is a removable device configured to connect to either printing device **408** or control system **404**. When memory device **420** is connected to printing device **408**, the printing device writes electrical energy usage measurements for operational activity periods to the storage device. Printing device **408** also reads any instructions held in memory device **420** directing printing device **408** to modify one or more operational parameters. When memory device **420** is connected to control system **404**, the control system reads electrical energy usage measurements for operational activity periods previously written by printing device **408**. Control system **404** may also generate and store instructions for printing device **408** directing printing device **408** to modify one or more operational parameters. In the example of FIG. **4**, memory device **420** is a solid-state data portable storage device employing NAND flash memory and a Uni-

versal Serial Bus (USB) connector. The USB connector of memory device **420** corresponds to USB ports **412** and **416** of control system **404** and printing device **408**, respectively. However, alternative embodiments of memory device **420** include portable hard drives, solid state memory cards such as SD cards, optical media including CDs and DVDs data disks, magnetic disks, and other removable data storage devices. Alternative memory device ports **412** and **416** may be configured to accommodate the various memory storage devices described above. An operator physically transports and connects memory storage device **420** to control system **404** and printing device **408**.

[0026] The operation of the control system with an example printing device is depicted in FIG. **5**. Process **500** begins with a printing device measuring its electrical energy consumption for an operational activity period over a predetermined period of time (block **504**). Using the example printing device of FIG. **2**, controller **80** receives periodic updates from electrical power sensor **68** indicating the electrical power being consumed by electrical power supply **64**. The electrical energy usage for a given time period may be approximated by the average power usage multiplied by the length of the time period, which is typically expressed in units of joules, watt-hours, or kilowatt-hours. While the electrical energy usage is being measured, the operational activity period of the printing device is also being measured. The operational activity period measurements identified by the controller **80** may include the number of media sheets that are printed, and may additionally measure the amount of colorant consumed during the time period in the activity level measurement. The example printing device **10** of FIG. **2** uses one or more colors of solid ink as a colorant, but alternative colorants include aqueous ink, toner, or gel materials.

[0027] After measuring electrical energy consumption for operational activity periods for predetermined time periods, the printing device sends the electrical energy consumption measurements for the operational activity periods to the control system (block **508**). As depicted in FIG. **2** and FIG. **3**, the electrical energy consumption measurements for the operational activity periods may be sent via a data network, or may be recorded to a memory device, such as a portable digital storage device that is subsequently connected to a communication port in the control system. The control system then compares the measured electrical energy consumption for an operational activity period to the measurement of an earlier equivalent operational activity period for the same device, or an estimate of electrical energy consumption for a corresponding operational activity period for a different printing device (block **512**). Using control system **100** of FIG. **1** as an example, controller **104** receives the electrical energy consumption for an operational activity period via network interface **112** or by reading the information from a data storage device attached to memory device interface **116**. Controller **104** then references operational activity database **120** to identify an electrical energy consumption measurement for a corresponding operational activity period for a second printing device or for the monitored printing device configured with different operational parameters. If the printing device communicating with the controller is a solid ink printer, then the second printing device may be another type of printer, such as an aqueous ink printer or a laser printer. If the comparison is made with respect to a second printing device, an estimate of electrical energy consumption for a comparable operational activity period is made based on operational activity period

data stored in operational activity database **120**. These data may include quantification criteria such as time period, images or pixels and historical, measured or estimated energy use levels for one or more operational states. The comparative energy consumption may also be produced by measuring electrical energy consumption for the first printing device during an earlier operational activity period of equivalent time length and comparable operational activity level.

[0028] If the difference between the measured energy consumption and the comparative energy consumption identified by the control system is less than a predetermined threshold (block **516**), then the printing system may continue to operate with existing operational parameters (block **528**). In one embodiment the predetermined threshold may include any energy consumption measurement that exceeds the comparative energy consumption of the comparative reference device by some established level. The predetermined threshold may also be chosen as a percentage above or below the comparative energy consumption level, such as 80% or 120% of the comparative energy consumption. Still another predetermined threshold could be an absolute value of energy consumption above or below the comparative energy consumption, such as thresholds of five kilowatt-hours above or below the comparative energy consumption value. In situations where the difference in energy consumption exceeds the predetermined threshold (block **516**), the control system generates an instruction for the printing device to modify one or more operational parameters (block **520**). Examples of operational parameter modifications include modifying the proportion of time that a printing device spends in a low-power standby mode, instructing the printing device to shut itself off after a period of inactivity, modifying the throughput of printing operations to lower energy consumption, and adjusting the temperature of printer components, such as the temperature of a melt plate for melting ink, media preheating level, and adjusting the temperature of a transfix roller in a phase-change printer or a fuser roller in a laser printer. An alternative instruction sent from the control system directs the printing device to modify an operational cost parameter. An operational cost parameter affects the monetary cost of operating the printing device, but does not necessarily reduce the electrical power consumption of the device. A printer may modify one or more operational cost parameters including switching between duplex and simplex printing modes and printing in a lower resolution mode that uses a reduced amount of colorant per media sheet. In some printing devices, these modifications make a minimal impact on electrical energy consumption, but reduce the overall cost of operating the printing device. Another operational cost parameter modification may involve providing a reward or compensation for operating the printing device if the electrical energy usage attains an optimal level or exceeds a comparative threshold, respectively. The reward or compensation may take any suitable form, such as a direct monetary discount that is proportional to the cost of the marginal amount of electrical energy consumed beyond the predetermined threshold. Alternative reward or compensation methods provide user cost benefits such as providing complementary consumables, including colorants and media sheets, or credits for printer servicing and maintenance. The amount of the reward or compensation may be determined based on pre-established criteria, and the control system may communicate the determined amount via the memory device or data communications network described above.

[0029] Data sent from the control system to the printing device in process step **520** may additionally include the electrical energy consumption measurement for the corresponding operational activity period. Some printing devices are configured with a display mechanism such as display **86** of printer **10** in FIG. **1**. The measured electrical energy consumption for an operational activity period, the electrical energy consumption measurement for the corresponding operational activity period, and the difference between the measured electrical energy consumption figures are available for viewing on display **86**. An alternative mechanism for displaying the energy usage information is to have the printing device print the information on a media sheet in response to a request to produce the energy usage information.

[0030] The printing device modifies its operational parameters in response to the instruction generated by the control system (block **524**). The printing device may receive the instructions using a method similar to how the printing device sends energy consumption and activity level information to the control system. In the embodiment of FIG. **3**, the printing devices may receive instructions via the data network. In the embodiment of FIG. **4**, the control system may record the operational parameter modification on the data storage device, and the printing device receives the instruction when the data storage device is subsequently connected to the printing device's memory device port. Once received, a controller in each printing device, such as controller **80** of FIG. **2**, adjusts one or more operational parameters in response to the instructions sent by the control system.

[0031] It will be appreciated that variants of the above-disclosed and other features, and functions, or alternatives thereof, may be desirably combined into many other different systems or applications. For example, while the printing device depicted in FIG. **2** is a phase change ink image printing device, various printing devices using alternative printing techniques may also be modified to include the foregoing features. Further, while printing devices are disclosed above, electrical energy consuming devices other than printers may also be modified to include the foregoing features. Various presently unforeseen or unanticipated alternatives, modifications, variations, or improvements therein may be subsequently made by those skilled in the art, which are also intended to be encompassed by the following claims.

What is claimed is:

1. A system for adjusting at least one operational parameter for at least one electrical energy consuming device comprising:

- a communication port configured to receive electrical energy consumption measurements for operational activity periods from a plurality of electrical energy consuming devices; and
- a controller communicatively connected to the communication port to receive the electrical energy consumption measurements for operational activity periods from each electrical energy consuming device communicatively connected to the communication port, the controller being configured to identify an electrical energy consumption measurement difference between an electrical energy consumption measurement for an operational activity period that was received from a first electrical energy consuming device and an electrical energy consumption measurement for a corresponding operational activity period that was stored in memory communicatively connected to the controller, and the controller

being configured to modify an operational parameter for the first electrical energy consuming device in response to the difference being greater than a predetermined threshold and to communicate the modified operational parameter to the first electrical energy consuming device through the communication port to enable modified operation of the first electrical energy consuming device.

2. The system of claim 1, the communication port further comprising:

a network interface communicatively connected to the controller and to the plurality of electrical energy consuming devices.

3. The system of claim 1, the communication port further comprising:

a memory device interface configured to connect operatively to a memory device to receive at least one electrical energy consumption measurement for an operational activity period that was stored in the memory device by the first electrical energy consuming device.

4. The system of claim 1 further comprising:

a database configured to store a plurality of electrical energy consumption measurements for operational activity periods, the database being communicatively connected to the controller to enable the controller to retrieve an electrical energy consumption measurement for an operational activity period that corresponds to the

operational activity period for the electrical energy consumption measurement received from the first electrical energy consuming device.

5. The system of claim 1, the operational parameter adjusted for the first electrical energy consuming device is an operational cost parameter.

6. The system of claim 5, the controller being further configured to adjust an operational cost parameter of an electrical energy device by an amount corresponding to the identified difference.

7. The system of claim 1, the controller being further configured to identify an electrical energy consumption measurement difference between an electrical energy consumption measurement for an operational activity period received from a solid ink printer and an electrical energy consumption measurement for a corresponding operational activity period of another type of printer.

8. The system of claim 7, wherein the other type of printer is an aqueous ink printer and the controller is further configured to retrieve an electrical energy consumption measurement for the corresponding operational activity period of the aqueous ink printer.

9. The system of claim 8 wherein the operational activity period is a count of media sheets printed by the aqueous ink printer during a predetermined period of time.

10. The system of claim 8 wherein the operational activity period is a measurement of a quantity of colorant consumed by the aqueous ink printer during a predetermined period of time.

* * * * *