


Features and Components

JM EPDM Metal/Membrane Flashing is a specially designed and manufactured flashing for sealing and waterproofing JM EPDM roofing systems where they join an adjacent bituminous roof membrane.

Materials: A nominal 6" (15.24 cm) strip of black JM EPDM membrane secured to flanges of nominal 4" (10.16 cm) wide galvanized steel.

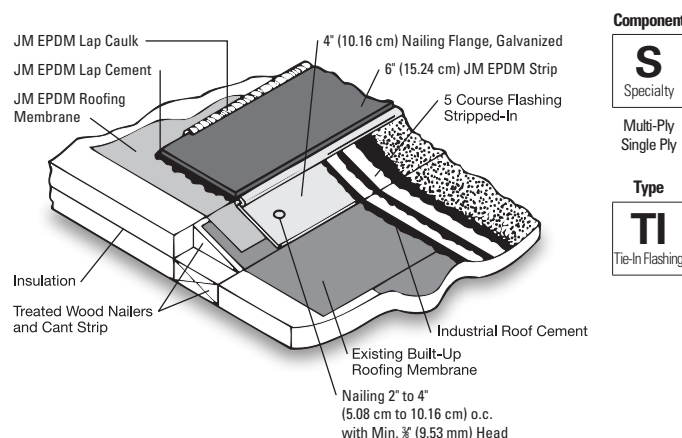

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS				
	HA	CA	CA	HW	HA	CA	HW	SA	MF
Compatible with all multi-ply systems									

Single Ply	TPO				PVC			EPDM		
	MF	AD	SA	IW	MF	AD	IW	MF	AD	BA
Compatible with the selected single ply systems above										

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened IW = Induction Weld BA = Ballasted AD = Adhered

Energy and the Environment

Pre-Consumer Recycled Content	0%
Post-Consumer Recycled Content	0%

Peak Advantage® Guarantee Information

Covered under the JM Peak Advantage Guarantee when installed in a JM approved roofing system.

Installation/Application

- Do not install EPDM membrane in direct contact with asphalt or coal tar pitch.
- Refer to JM applicator guides or detail drawings for instructions.

Packaging and Dimensions

EPDM Membrane width	6" (15.24 cm)
Galvanized Steel width	4" (10.16 cm)
Linear ft (m) per Carton	100 lin ft (30.48 lin m)
Weight per Carton lb (kg) (approx)	65 lb (29.5 kg)
Producing Location	Lewiston, ME

Storage

Shelf Life	12 months from manufacture date
Storage Conditions	Store indoors, out of direct sunlight
Temperature Range	60°F to 80°F (16°C to 27°C)

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the web at www.jm.com/roofing. The physical and chemical properties of the product listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check with the regional sales representative nearest you for current information.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville roofing products and systems, visit www.jm.com/terms-conditions.