

Features and Components

TRUFast® VERSA-FAST® Fasteners are engineered to secure insulation, cover boards and base sheets to light weight insulating concrete (LWIC) and gypsum decks. The VERSA-FAST Fastener features an exclusive thread design engineered for exceptional pull out. When used in conjunction with VERSA-FAST Metal Plates, multiple fasteners can be installed to achieve the required minimum pull out value.

Use: Insulation

Material: Fasteners - SAE C1022, heat treated

Gauge: #12

Head: #2 Phillips Head


Color: Gray

Deck Types: Light Weight Insulating Concrete (LWIC) and Gypsum

Coating: Tru-Kote™ Epoxy E-Coat

Plate Compatibility

- VERSA-FAST Metal Plates

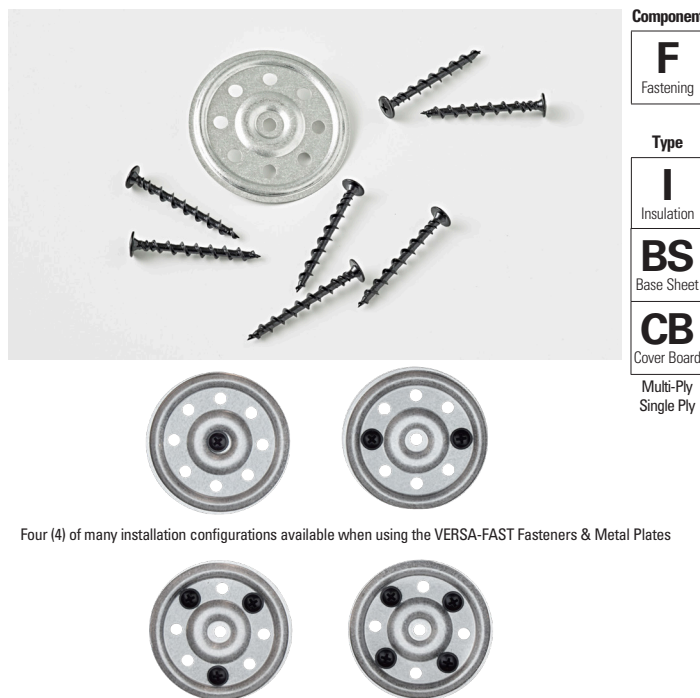

Four (4) of many installation configurations available when using the VERSA-FAST Fasteners & Metal Plates

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP			SBS				
	HA	CA	HW	HA	CA	HW	SA	MF		
Use to fasten insulation in all multi-ply systems										

Single Ply	TPO				PVC			EPDM		
	MF	AD	SA	IW	MF	AD	IW	MF	AD	BA
Use to fasten insulation in the selected single ply systems above										

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened IW = Induction Weld BA = Ballasted AD = Adhered

Energy and the Environment

Recycled Content	This steel based product contains a minimum of 25% post consumer recycled materials by weight
------------------	---

Peak Advantage® Guarantee Information

Systems
Approved to use with any Peak Advantage Guarantee

Codes and Approvals*



*Fastener approvals are based on system approvals

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the web at www.jm.com/roofing. The physical and chemical properties of the product listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check with the regional sales representative nearest you for current information.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville roofing products and systems, visit www.jm.com/terms-conditions.

Installation/Application

Refer to the application instructions guidelines for proper utilization of this product.

Packaging and Dimensions

Fastener Sizes	Quantity/Container
2¼" to 6¼" (57.2 mm to 158.8 mm)	1,000/Container