


Features and Components

Use: Unit used to seal uneven penetrations through the membrane that are difficult to flash. The penetration pan is slit on one side to allow for positioning around objects to be flashed. A welding tab is included to seal the penetration pan once installed.

Material: 125 mil (3.18 mm) thick, one piece molded unit, vacuum-formed and fabricated from impact-resistant rigid PVC (polyvinyl chloride).

Color: Grey

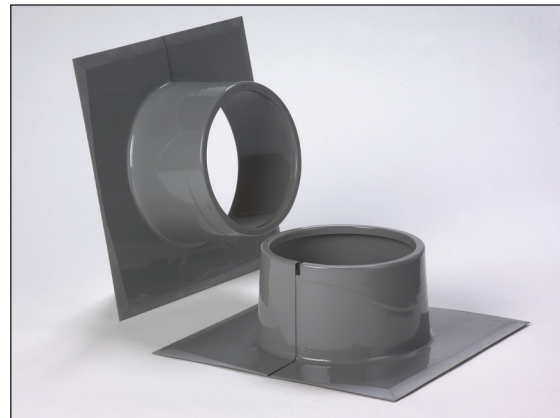

Component

A
Accessory

Single Ply

Type

FP
Penetration

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP			SBS				
	HA	CA	HW	HA	CA	HW	SA	MF		
Use to fasten insulation in all multi-ply systems										

Single Ply	TPO				PVC			EPDM		
	MF	AD	SA	IW	MF	AD	IW	MF	AD	BA
Use to fasten membranes and insulation in single ply systems										

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened IW = Induction Weld BA = Ballasted AD = Adhered

Peak Advantage® Guarantee Information

Systems
Approved for use in any JM Peak Advantage Guarantee System

Installation/Application



Hot Air Weld

- Do not install in direct contact with asphalt or coal tar pitch
- For use with JM EPDM/PVC Pourable Sealer
- Refer to JM PVC, TPO, or EPDM applicator guides or detail drawings for instructions

Packaging and Dimensions

Size	6" (15.2 cm) diameter
Nominal Thickness	0.125" (3.18 mm)
Pockets per Box	12
Weight per Box	10 lb (4.5 kg)

Storage

Storage Conditions	Store indoors, out of direct sunlight, keep clean and dry prior to use.
--------------------	---

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the web at www.jm.com/roofing. The physical and chemical properties of the product listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check with the regional sales representative nearest you for current information.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville roofing products and systems, visit www.jm.com/terms-conditions.