


## Features and Components

**Use:** Primarily used as a safety warning line for roof perimeters.

**Material:** 45 mil thick, reinforced, UV-resistant PVC (polyvinyl chloride) with Elvaloy®\* KEE (ketone ethylene ester).

**Colors:** Yellow

\*Elvaloy® KEE is a registered trademark of Dow.

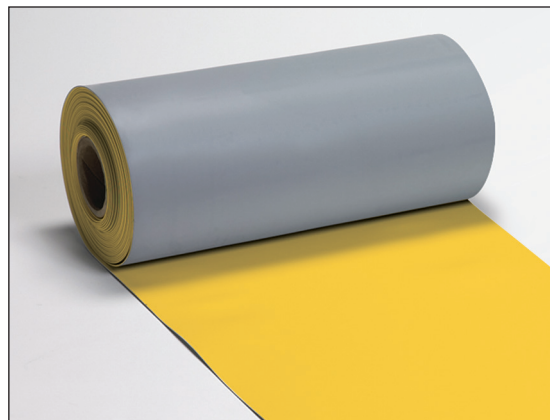

**Component**

**A**  
Accessory

Single Ply

**Type**

**PT**  
Protection

**System Compatibility** This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

| Multi-Ply                              | BUR |    | APP |    | SBS |    |    |    |    |
|----------------------------------------|-----|----|-----|----|-----|----|----|----|----|
|                                        | HA  | CA | CA  | HW | HA  | CA | HW | SA | MF |
| <b>Do not use in Multi-Ply systems</b> |     |    |     |    |     |    |    |    |    |

| Single Ply                                                   | TPO |    | PVC |    | EPDM |    |    |
|--------------------------------------------------------------|-----|----|-----|----|------|----|----|
|                                                              | MF  | FA | MF  | FA | MF   | FA | BA |
| <b>Compatible with the selected Single Ply systems above</b> |     |    |     |    |      |    |    |

**Key:** HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

## Peak Advantage® Guarantee Information

| Systems                                                    |
|------------------------------------------------------------|
| Approved for use in any JM Peak Advantage Guarantee System |

## Installation/Application



Hot Air Weld

- Do not install JM PVC Detail Strip in direct contact with asphalt or coal tar pitch
- Refer to JM PVC applicator guides or detail drawings for instructions

## Packaging and Dimensions

|                            |                                |
|----------------------------|--------------------------------|
| Roll Size (width x length) | 12' x 150' (30.5 cm x 45.72 m) |
| Nominal Thickness          | 0.045" (1.83 mm)               |
| Coverage per Roll (gross)  | 150 ft² (13.93 m²)             |
| Weight per Roll            | 60 lb (39.0 kg)                |

## Storage

|                    |                                                                                     |
|--------------------|-------------------------------------------------------------------------------------|
| Storage Conditions | Store indoors, out of direct sunlight, and keep clean and dry prior to application. |
|--------------------|-------------------------------------------------------------------------------------|