

Features and Components

Use: Enables Electronic Leak Detection (ELD) testing on JM roofing assemblies.

Type: Water-Based electrically conductive primer.

Color: Black

Features: Compatible with low and high voltage ELD testing equipment; Non-reflective, flat black color aids with verifying installation coverage; Low-VOC, non-flammable, and solvent free.



Component

PR
Primer

Type

SU
Substrate

Multi-Ply
Single-Ply

System Compatibility

This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR	APP		SBS				
	HA	CA	HW	HA	CA	HW	SA	MF
Used to adhere Membranes in the selected multi-ply systems above								

Single Ply	TPO				PVC			EPDM		
	MF	AD	SA	IW	MF	AD	IW	MF	AD	BA
Compatible with the selected single ply systems above										

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened IW = Induction Weld BA = Ballasted AD = Adhered

Energy and the Environment

Maximum VOC	<100 g/l
-------------	----------

Physical Properties

Property	Conductive Primer
Surface Resistivity	10E4 ohms/sq
Solids by Volume	23.2%
Solids by Weight	13%
Weight per gallon	8.2 lb (3.72 kg)

All values are nominal.

Codes and Approvals*



*TruGround® Conductive Primer is a UL and FM approved product. Consult UL and FM for specific assembly approvals.

Installation/Application



Long Nap Roller Med. Nap Roller

- Apply when ambient temperature is between 45°F (7°C) and rising.
- Please refer to detailed installation instructions on product packaging.

Packaging and Coverage

Container Size	5 gal (18.9 L)
Shipping Weight (approx.)	50 lb (22.7 kg)/pail
Containers per Pallet	27
Pallet Weight, lb (kg)	1400 lb (635 kg)
Coverage Rate*	1250ft ² (116m ²) per pail

* Coverage, open and dry time rates can vary dramatically depending on the particular substrate and environmental conditions. Coverage rates stated herein are approximate only.

If FM Global® or UL® approval is required, consult specific RoofNavSM or the UL Certifications Directory for specific application rates

Storage

Shelf Life	12 months
Storage Conditions	Store in properly sealed original containers above 45°F (7°C). Do not allow product to freeze. Use within 6 months from opening.

Installation Instructions

Surface Prep- Surfaces should be dry and clean from heavy dirt, grease, or other contaminants.

Mixing- Always mix primer thoroughly before use. Inverting the pail for 5 minutes prior to use is recommended to allow settled materials to loosen. Product must be mixed to an even consistency using an electric mixer with a paint mixing attachment. Material that can not be mixed to a consistent liquid must be discarded.

Application- The use of boot covers is recommended to prevent tracking of the primer on roof surfaces. Ambient temperatures must be 45° F and rising prior to application. Using a 3/8" nap roller, apply a thin coat of the primer with overlapping strokes to ensure complete coverage. Avoid overapplication by removing excess primer from the nap roller prior to application. Any visible substrate through the primer indicates insufficient coverage, and additional primer should be applied. Porous substrates may require an additional coat of primer. Primer must be allowed to completely dry to the touch prior to the application of additional adhesives. Drying time will vary based on ambient conditions. TruGround primer should not be left exposed and must be covered by an overlying membrane on the same day. TruGround may also be applied via a spray application. Primer should be applied in a steady pattern with 3" (76mm) overlaps. The filter may need to be removed for spray applications.

Continuity Bonding- If joints between sheets exceed 1/8", apply the TruGround primer with a paint brush to the T-joints to ensure a continuous surface from board to board (see Image 1). Continuity bonding is required between previously coated sheets and between horizontal to vertical transitions to maintain electrical continuity. If the sheets are pre-coated, please contact Detec for additional information.

Connecting TruGround to Access Point- An access point for connecting electronic testing equipment to the TruGround primer must be provided (see Image 2). Apply the primer to the side of ALL metallic penetrations such as drains, HVAC units, and vents while applying the primer to the main portions of the substrate. If no metallic penetrations are located within the area where the primer is being installed, a grounding object must be installed. A metallic object should be fastened to the structural deck and connected to the primer by coating the side of the object with the primer. If a metallic object is utilized, it must be flashed to ensure waterproofing of the roof system.

Clean Up- Application tools may be cleaned using soap and water. Immediately seal and properly store any remaining primer and use

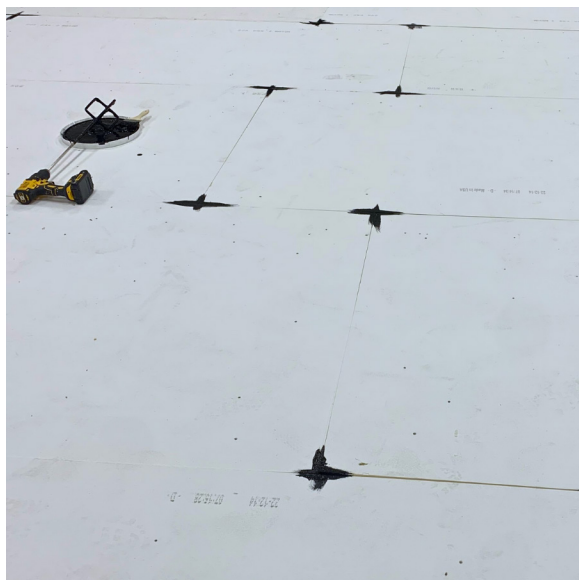


Image 1



Image 2

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the web at www.jm.com/roofing. The physical and chemical properties of the product listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check with the regional sales representative nearest you for current information.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville roofing products and systems, visit www.jm.com/terms-conditions.