

Features and Components

Termination Bars are extruded, pre-punched aluminum strips.

Anchor Discs are 2" (5.1 cm) diameter, round, Galvalume®-coated steel discs.


Masonry Nail-In Anchors are one-piece zinc anchors designed for fastening to concrete or masonry walls.

Use: Membranes

Materials: High Load Fasteners - Corrosion-Resistant Steel
Zinc Nail-In Anchors - Zinc-Coated Steel
Anchor Discs - Galvalume
Termination Bars - Extruded Aluminum

Deck Types: High Load Fasteners - Wood and 18-24 Gauge Metal
Zinc Nail-In Anchors - Concrete and Masonry

* Galvalume is a registered trademark of BIEC International, Inc. and some of its licensed producers.

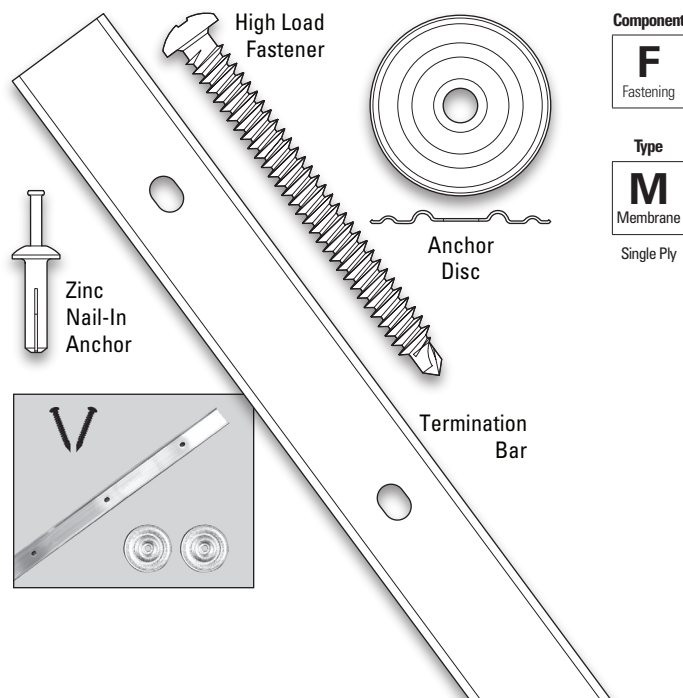

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS				
	HA	CA	HW	HA	CA	HW	SA	MF	
Used to fasten membranes in all multi-ply systems									

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered

Single Ply	TPO				PVC			EPDM		
	MF	AD	SA	IW	MF	AD	IW	MF	AD	BA
Used to fasten membranes in all single ply systems										

MF = Mechanically Fastened IW = Induction Weld BA = Ballasted AD = Adhered

Peak Advantage® Guarantee Information

Systems
Approved to use with any Peak Advantage Guarantee

Codes and Approvals



Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the web at www.jm.com/roofing. The physical and chemical properties of the product listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check with the regional sales representative nearest you for current information.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville roofing products and systems, visit www.jm.com/terms-conditions.

Installation/Application

Termination Bar:

- Secure with JM High Load Fastener or Zinc Nail-In Anchor

Zinc Nail-In Anchor:

- Pre-drill a 1/4" hole, 1 3/4" deep
- Install anchor using a hammer

Packaging and Dimensions

Item	Sizes	Quantity/Container
Fasteners	1 1/4" (3.18 cm) length	1,000/pail
Nail-In Anchors	1 1/4" (3.18 cm) length 1/4" (6.35 mm) diameter	1,000/box
Anchor Discs	2" (5.1 cm) diameter	1,000/box
Termination Bars	1 1/2" (3.4 cm) width 10' (3.05 m) length	50/tube 500' (152.4 m)/tube
Flat Termination Bar	1" (2.54 cm) width 10' (3.05 m) length	50/tube 500' (152.4 m)/tube
Producing Locations*	Agawam, MA Cleveland, OH Itasca, IL	

* The point of manufacture for fasteners and plates varies depending on the specific part. Call your local JM sales professional for assistance.