

Features and Components

Use: A 60mil (1.5 mm) pre-molded accessory designed for use as an inside corner or outside corner on all TPO thermoplastic roof systems. Engineered for compatibility in most corner conditions, this injection molded accessory provides several installation benefits:

- Efficient welding associated with corner flashing details
- Reduced inconsistencies in flashing details
- Consistent final appearance of flashing details at corner conditions

Application: Cut according to the diagram below for each application. Following final flashing membrane installation, hot-air weld and hand roll in either an inside corner or outside corner condition. No additional caulking or edge sealant is required.

Material: Pre-molded, non-reinforced TPO (thermoplastic polyolefin).

Colors: White



Component

A
Accessory

Single Ply

Type

FC
Curb/Corner

FW
Flashing Wall

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.


Multi-Ply	BUR		APP		SBS				
	HA	CA	HW	HA	CA	HW	SA	MF	
									Compatible with the selected multi-ply systems above

Single Ply	TPO				PVC			EPDM		
	MF	AD	SA	IW	MF	AD	IW	MF	AD	BA
										Do not use in single ply systems

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened IW = Induction Weld BA = Ballasted AD = Adhered

Peak Advantage® Guarantee Information

Systems
Approved for use in any JM Peak Advantage Guarantee System

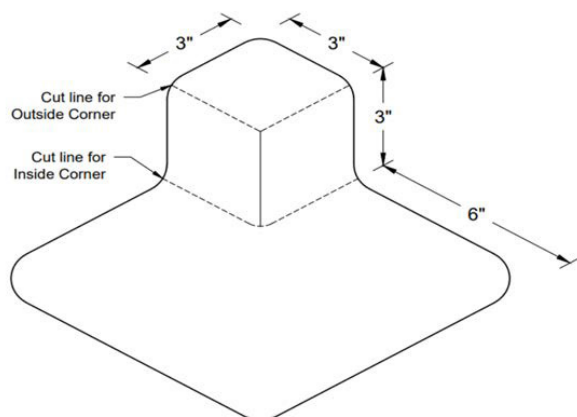

Installation/Application



Hot Air Weld

- Refer to JM TPO applicator guides or detail drawings for instructions.

Packaging and Dimensions

Size	9" x 9" x 3" (22.9 x 22.9 x 7.6 cm)
Corners per Box	20
Weight per Corner	5 oz (142 g)
Weight per Box	6.3 lb (2.9 kg)
Thickness	0.060" (1.52 mm)

Storage

Storage Conditions	Store indoors, out of direct sunlight, and keep clean and dry prior to application.
--------------------	---

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the web at www.jm.com/roofing. The physical and chemical properties of the product listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check with the regional sales representative nearest you for current information.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville roofing products and systems, visit www.jm.com/terms-conditions.