


## Features and Components

The UltraFast AccuTrac Fastener and Plate System utilizes the standard UltraFast Fastener and the UltraFast AccuTrac, recessed or flat bottomed, square plate. The AccuTrac tool positions the plate and installs fasteners 1½" - 6" (4.13 cm - 15.24 cm) in a one-step process. Consistent vertical alignment of fasteners ensures maximum thread engagement and pullout performance.

- Use:** Membranes
- Material:** Fasteners - Case-Hardened Steel  
Plates - Galvalume®-Coated Steel
- Gauge:** #12
- Head:** #3 Phillips Head
- Plate:** UltraFast AccuTrac™ - 3" (7.62 cm) Square\*\*
- Color:** Blue (fasteners), Grey (plates)
- Deck Type:** Wood or 18 - 24 gauge (1.25 mm - 0.51 mm) Metal.

\*Galvalume is a registered trademark of BIEC International, Inc. and some of its licensed producers.

\*\*Standard UltraFast Plates are not compatible with this system.

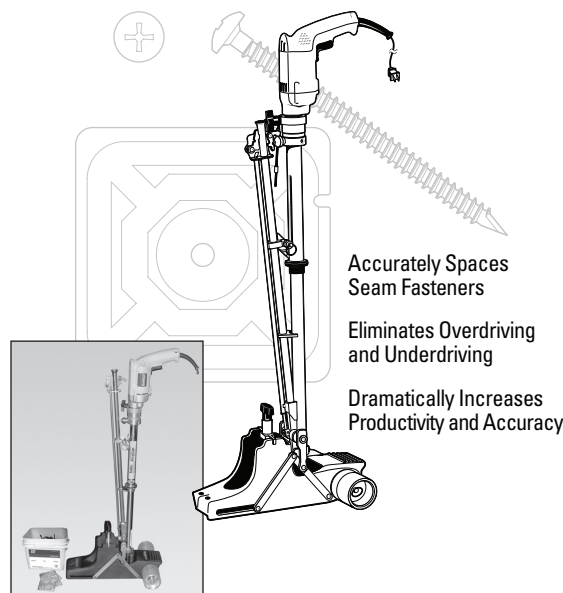

Component

**F**  
Fastening

Type

**I**  
Insulation

Multi-Ply  
Single Ply

**System Compatibility** This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

| Multi-Ply                                         | BUR |    | APP |    | SBS |    |    |    |  |
|---------------------------------------------------|-----|----|-----|----|-----|----|----|----|--|
|                                                   | HA  | CA | HW  | HA | CA  | HW | SA | MF |  |
| Use to fasten insulation in all multi-ply systems |     |    |     |    |     |    |    |    |  |

| Single Ply                                                   | TPO |    |    |    | PVC |    |    | EPDM |    |    |
|--------------------------------------------------------------|-----|----|----|----|-----|----|----|------|----|----|
|                                                              | MF  | AD | SA | IW | MF  | AD | IW | MF   | AD | BA |
| Use to fasten membranes and insulation in single ply systems |     |    |    |    |     |    |    |      |    |    |

**Key:** HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened IW = Induction Weld BA = Ballasted AD = Adhered

## Energy and the Environment

|                  |                                                                                               |
|------------------|-----------------------------------------------------------------------------------------------|
| Recycled Content | This steel based product contains a minimum of 25% post consumer recycled materials by weight |
|------------------|-----------------------------------------------------------------------------------------------|

## Peak Advantage® Guarantee Information

|                                                   |
|---------------------------------------------------|
| Systems                                           |
| Approved to use with any Peak Advantage Guarantee |

## Codes and Approvals\*



\*Fastener approvals are based on system approvals

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the web at [www.jm.com/roofing](http://www.jm.com/roofing). The physical and chemical properties of the product listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check with the regional sales representative nearest you for current information.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville roofing products and systems, visit [www.jm.com/terms-conditions](http://www.jm.com/terms-conditions).

## Installation/Application

Refer to the application instructions guidelines for proper utilization of this product.

## Packaging and Dimensions\*

|                                |                                |
|--------------------------------|--------------------------------|
| UltraFast Fastener Sizes       | 1½" (4.13 cm) to 6" (15.24 cm) |
| Fastener Quantity/Container    | 1,000/pail                     |
| Plate Size (flat and recessed) | 3" (7.62 cm) square            |
| Plate Quantity/Container       | 1,000/pail                     |
| Producing Locations**          | Agawam, MA and Itasca, IL      |

\* UltraFast Fasteners and UltraFast AccuTrac Plates are purchased separately.

\*\*The point of manufacture for fasteners and plates varies depending on the specific part. Call your local JM sales professional for assistance.