

Features and Components

Lite-Deck Fasteners are available in lengths from 2⁵/₈" to 12" (67 mm to 305 mm), come with a square drive and offer coarse thread to provide high pullout resistance.

Lite-Deck plates are 3" (76 mm) round, Galvalume®-coated plates for use with Lite-Deck Fasteners.

Use: Insulation

Fastener: Steel


Head: 6 Lobe Drive

Plate: 3" (76 mm) Galvalume-Coated Steel - Round

Color: Black (fasteners) Grey (plates)

Deck Type: Gypsum, and Cementitious Wood Fiber

* Galvalume is a registered trademark of BIEC International, Inc. and some of its licensed producers.

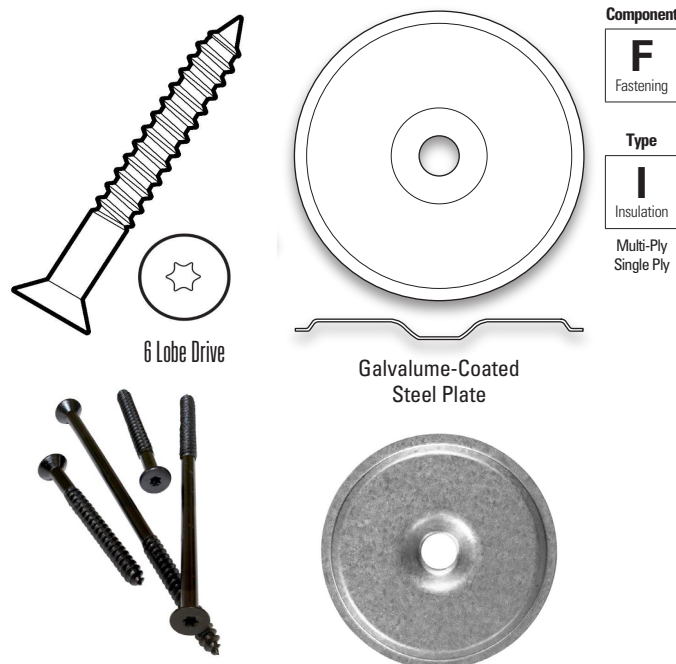

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS				
	HA	CA	HW	HA	CA	HW	SA	MF	
	Use to fasten insulation in all multi-ply systems								

Single Ply	TPO				PVC			EPDM		
	MF	AD	SA	IW	MF	AD	IW	MF	AD	BA
	Use to fasten membranes and insulation in single ply systems									

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened IW = Induction Weld BA = Ballasted AD = Adhered

Energy and the Environment

Recycled Content	This steel based product contains a minimum of 25% post consumer recycled materials by weight
------------------	---

Peak Advantage® Guarantee Information

Systems
Approved to use with any Peak Advantage Guarantee

Codes and Approvals*



*Fastener approvals are based on system approvals

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the web at www.jm.com/roofing. The physical and chemical properties of the product listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check with the regional sales representative nearest you for current information.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville roofing products and systems, visit www.jm.com/terms-conditions.

Installation/Application

The Lite-Deck Fastener can be installed into cementitious wood fiber decks without pre-drilling. A pilot hole is required for gypsum; hole size is determined by pullout results. The OMG Lite-Deck Fastener must penetrate the deck a minimum of 2-in. Drive the fastener until a slight depression is seen around the plate, or with rigid insulation boards, drive fastener until the plate begins to dimple.

Packaging and Dimensions

Fastener Lengths	Plate Diameter	Quantity/Container
2 ⁵ / ₈ " - 4" (67.7 mm - 101.6 mm)	3" (76.2 mm) round	500/pail
5" - 8" (127 mm - 203.2 mm)	3" (76.2 mm) round	250/pail
9" - 12" (177.8 mm - 304.8 mm)	3" (76.2 mm) round	125/pail
Plates	3" (76.2 mm) round	500/box
Producing Locations*	Agawam, MA and Itasca, IL	

* The point of manufacture for fasteners and plates varies depending on the specific part. Call your local JM sales professional for assistance.

Product Specifications

Product Description	Part Length		Shank Length		Thread Length	
	(inches)	(mm)	(inches)	(mm)	(inches)	(mm)
JM LITE DECK FASTENER 2 5/8" 500/BOX	2 5/8	66.7	7/8	22.2	1 3/4	44.5
JM LITE DECK FASTENER 3" 500/BOX	3	76.2	3/4	19.1	2 1/4	57.2
JM LITE DECK FASTENER 4" 500/BOX	4	101.6	1	25.4	3	76.2
JM LITE DECK FASTENER 5" 250/BX	5	127	2	50.8	3	76.2
JM LITE DECK FASTENER 6" 250/BOX	6	152.4	3	76.2	3	76.2
JM LITE DECK FASTENER 7" 250/BOX	7	177.8	4	101.6	3	76.2
JM LITE DECK FASTENER 8" 250/BOX	8	203.2	5	127	3	76.2