


## Features and Components

**Use:** Used as a decorative rib to simulate the aesthetics of a standing seam metal roof. This accessory is for use on fully adhered JM PVC and JM PVC SD Plus roofing systems with 60 mil or greater membranes.

**Materials:** UV-resistant PVC (polyvinyl chloride) and an Elvaloy®\* KEE (ketone ethylene ester). Preformed, non-reinforced, extruded, and heat-weldable.

**Colors:** White; Sandstone; and Grey

\* Elvaloy is a registered trademark of Dow.

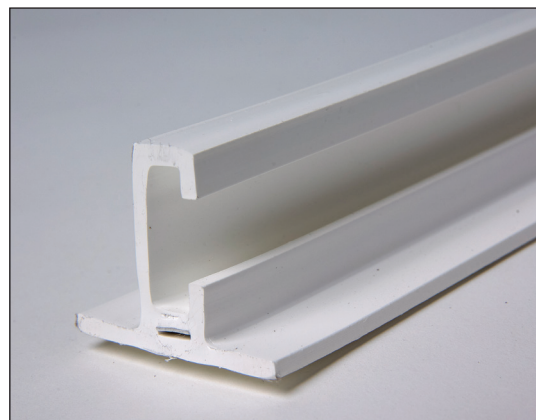

**Component**

**A**  
Accessory

Single Ply

**Type**

**MS**  
Membrane  
Seaming

**System Compatibility** This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

| Multi-Ply                              | BUR |    | APP |    | SBS |    |    |    |    |
|----------------------------------------|-----|----|-----|----|-----|----|----|----|----|
|                                        | HA  | CA | CA  | HW | HA  | CA | HW | SA | MF |
| <b>Do not use in Multi-Ply systems</b> |     |    |     |    |     |    |    |    |    |

| Single Ply                                                   | TPO |    | PVC |    | EPDM |    |    |
|--------------------------------------------------------------|-----|----|-----|----|------|----|----|
|                                                              | MF  | FA | MF  | FA | MF   | FA | BA |
| <b>Compatible with the selected Single Ply systems above</b> |     |    |     |    |      |    |    |

**Key:** HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

## Peak Advantage® Guarantee Information

|                                                            |
|------------------------------------------------------------|
| Systems                                                    |
| Approved for use in any JM Peak Advantage Guarantee System |

## Installation/Application



Hot Air Weld

- Do not install in direct contact with asphalt or coal tar pitch.
- Refer to the JM PVC applicator guides or detail drawings for instructions.

## Packaging and Dimensions

|                  |                                                                                                                                                |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| Profile Size     | 1½" w x 1¼" h x 10' (38 mm x 32 mm x 3.05 m)                                                                                                   |
| Profile Weight   | 2.94 lb (1.33 kg) per rib                                                                                                                      |
| Spine Size       | ¼" w x 1⅜" h x 7' (6.35 mm x 21 mm x 2.13 m) perforated every 6" (15.24 cm)                                                                    |
| Items per Box    | 24 – 10' (3.05 m) Profiles and one (1) piece of 7' (2.13 m) connector perforated every 6" (15.24 cm)<br>Profile Spine (connector) – 14 per box |
| Coverage per Box | 240 lin ft (73.2 lin m)                                                                                                                        |
| Weight per Box   | 80 lb (36.3 kg)                                                                                                                                |

## Spine Only Box

|                |                                                |
|----------------|------------------------------------------------|
| Spine Size     | ¼" w x 1⅜" h x 6" l (6.35 mm x 21 mm x 2.13 m) |
| Spine Weight   | 0.04 lb (0.02 kg)                              |
| Items per Box  | 24 - 6" Spines                                 |
| Weight per Box | 2.5 lb (1.13 kg)                               |

## Storage

|                    |                                                                                                                     |
|--------------------|---------------------------------------------------------------------------------------------------------------------|
| Storage Conditions | Keep dry and clean prior to installation. Store flat, not on end, protected from warping, bending or contamination. |
|--------------------|---------------------------------------------------------------------------------------------------------------------|